


带挡圈槽型 直杆型

导向轴

代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
SAE01	带挡圈槽型	g6	GCr15	SUJ2	高频淬火	—
SAE02					有效硬化层深度见P16	镀硬铬, 镀层硬度HV750~, 镀层厚度3μm
SAE03			9Cr18Mo	SUS440C	淬火硬度	低温镀黑铬
SAE06					GCr15	—
SAE07			或同等硬度耐蚀钢		9Cr18Mo或同等硬度耐蚀钢	—
SAE22			45	S45C	S45C	镀硬铬, 镀层硬度HV750~, 镀层厚度3μm




SAE01/02/06/07/22

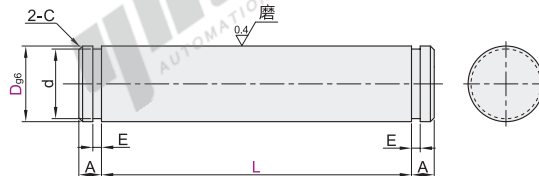

6.3/

SAE03

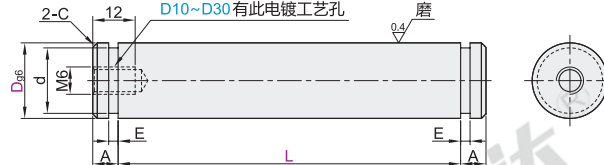

① 圆度/直线度/垂直度/同轴度/硬度变化/铬层分布, 请参阅导向轴产品简介。

视角标准: 第一视角

型号		L	A	E	d	附带挡圈(2个)		C
代码	D _{g6}	最小单位1				SAE01/06	SAE02/07/22	
SAE01	3	-0.002 -0.008	2	0.5	2	TBP11-2	TBP12-2	0.5以下
	4	-0.004 -0.012		0.7	3	TBP11-3	TBP12-3	
	5	-0.004 -0.012			4	TBP11-4	TBP12-4	
	6	-0.005 -0.014	3	0.9	5	TBP11-5	TBP12-5	
	8	-0.005 -0.014			7	TBP11-7	TBP12-7	
	10	-0.006 -0.017			9.6	TBP01-10	TBP02-10	
	12	-0.006 -0.017	1.15	1.35	11.5	TBP01-12	TBP02-12	
	13	-0.006 -0.017			12.4	TBP01-13	TBP02-13	
	15	-0.007 -0.020			14.3	TBP01-15	TBP02-15	
	16	-0.007 -0.020	4.5	1.65	15.2	TBP01-16	TBP02-16	
SAE22	18	-0.007 -0.020			17	TBP01-18	TBP02-18	1.0以下
	20	-0.007 -0.020			19	TBP01-20	TBP02-20	
	25	-0.007 -0.020			23.9	TBP01-25	TBP02-25	
	30	-0.007 -0.020			28.6	TBP01-30	TBP02-30	

① SAE03仅适用于D≤30且L≤500。

① 适用挡圈请参阅P888/890。



请按图示订货

代码	型号	D	L	A
SAE01	D3	4	8~400	2

SAE01—D3—L12

① 可选加工

代码	型号	D	L	可选加工代码
SAE01	D3	4	8~400	HC

SAE01—D3—L12—HC



未税价(元)

数量	1~9	10~
价格	95%	另行报价

交货期	3
-----	---

®

