


一端内螺纹型·标准型


一端台阶型

转轴

代码	类型	公差		材质		表面处理
		D	P	国标	相当	
MBD01	一端内螺纹型	g6	g6	45	S45C	发黑
MBD02				0Cr18Ni9	SUS304	无电解镀镍
MBD16				35CrMo	SCM435 硬度28-33HRC	无电解镀镍
MBD22				45	S45C	发黑
MBD41		h7	h7	0Cr18Ni9	SUS304	—
MBD46				45	S45C	无电解镀镍
MBD62				0Cr18Ni9	SUS304	—
MBD66				45	S45C	无电解镀镍
MBD81		h9	h7	0Cr18Ni9	SUS304	—
MBD82				45	S45C	发黑
MBD86				0Cr18Ni9	SUS304	—

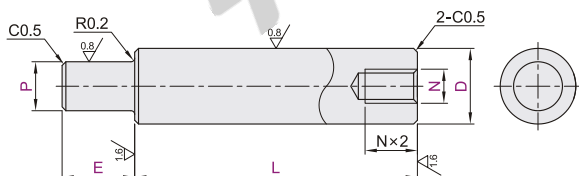

D-P	g6	h7	h9
2~3	-0.002 -0.008	0 -0.010	0 -0.025
3.1~6	-0.004 -0.012	0 -0.012	0 -0.030
6.1~10	-0.005 -0.014	0 -0.015	0 -0.036
10.1~18	-0.006 -0.017	0 -0.018	0 -0.043
18.1~30	-0.007 -0.020	0 -0.021	0 -0.052
30.1~50	-0.009 -0.025	0 -0.025	0 -0.062



① 圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。

g6

型号		最小单位0.1		最小单位1		N	
代码	D _{g6}	L	E	P			
MBD01 MBD02 MBD16 MBD22	6	18.0~300.0				3 4	
	8	18.0~400.0		2≤P<D		3 4 5 6	
	10	18.0~500.0				4 5 6 8	
	12	25.0~600.0				5 6 8	
	13					5 6 8	
	15	25.0~700.0				5 6 8 10	
	16			4≤P<D		5 6 8 10 12	
	17					5 6 8 10 12	
	18	35.0~800.0	1≤E≤P×6			5 6 8 10 12 16	
	20					5 6 8 10 12 16	
	22					5 6 8 10 12 16	
	25	45.0~800.0		8≤P<D		5 6 8 10 12 16	
	30	55.0~800.0				8 10 12 16 20	
	35	65.0~800.0				8 10 12 16 20 24	
	40	75.0~800.0		15≤P<D		12 16 20 24 30	
	50	95.0~800.0				16 20 24 30	


h7

型号		最小单位0.1		最小单位1	N	
代码	D _{h7}	L	E	P		
MBD41 MBD46	6	18.0~300.0			3 4	
	8	18.0~400.0		2≤P<D	3 4 5 6	
	10	18.0~500.0			4 5 6	
	12	25.0~600.0			5 6 8	
	15	25.0~700.0		4≤P<D	5 6 8 10	
	20	35.0~800.0	1≤E<P×6		5 6 8 10 12 16	
	25	45.0~800.0			5 6 8 10 12 16	
	30	55.0~800.0		8≤P<D	8 10 12 16 20	
	35	65.0~800.0			8 10 12 16 20 24	
	40	75.0~800.0		15≤P<D	12 16 20 24 30	
50	95.0~800.0			16 20 24 30		

h9

型号	最小单位0.1		最小单位1		N	
代码	D _{h9}	L	E	P		
MBD62	6	18.0~300.0			3	4
	8	18.0~400.0		2≤P<D	3	4 5 6
	10	18.0~500.0			4	5 6
	12	25.0~600.0			5	6 8
MBD66	15	25.0~700.0	1≤E<P×6	4≤P<D	5	6 8 10
MBD81	20	35.0~800.0			5	6 8 10 12 16
MBD82	25	45.0~800.0			5	6 8 10 12 16
MBD86	30	55.0~800.0		8≤P<D	8	10 12 16 20
	35	65.0~800.0		15≤P<D	8	10 12 16 20 24



代码	技术说明																
LC	变更L尺寸公差 	选型方法 LC ① $L < 400$ 变更为 $L \pm 0.05$ $L \geq 400$ 变更为 $L \pm 0.1$															
LA() LB()	增加1处平面LA()  增加2处平面LB() 	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ① 最小单位1 ② 指定G-J-X时，须为50以下 <table border="1"><thead><tr><th>D</th><th>H</th></tr></thead><tbody><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></tbody></table>	D	H	6~17	1	18~40	2	50	3							
D	H																
6~17	1																
18~40	2																
50	3																
KB() KC()	增加1处键槽KB()  增加2处键槽KC() 	选型方法 KB50-S10 选型方法 KC50-C8-F40-T10 ① 最小单位1 ② 指定S-T-C时，须为100以下 ③ 键槽详情见转轴产品简介。 ④ 需要3处键槽时，请同时选择KB与KC															
PA()	增加轴端键槽(仅P部) 	选型方法 PA10 ① 最小单位1 ② $PA \geq 50$, $PA \geq E$, $P \leq 5$ 不适用 ③ 键槽详情见转轴产品简介。															
KD()	增加开口凸轮用槽 	选型方法 KD10 ① 最小单位1 ② 适用于右表D规格 <table border="1"><thead><tr><th>D</th><th>d</th><th>V2</th></tr></thead><tbody><tr><td>6</td><td>5</td><td>4</td></tr><tr><td>8</td><td>7</td><td>4</td></tr><tr><td>10</td><td>8</td><td>5</td></tr><tr><td>12</td><td>10</td><td>5</td></tr></tbody></table>	D	d	V2	6	5	4	8	7	4	10	8	5	12	10	5
D	d	V2															
6	5	4															
8	7	4															
10	8	5															
12	10	5															
MA() MB()	增加挡圈槽(附带挡圈) 	选型方法 MA10—MB10 ① 最小单位1 ② $MA(MB) = 4 - L/2$ ③ 挡圈槽尺寸见转轴产品简介。															



请按照图示订货

型号		L	E	P	N
代码	D				
MBD01	12	25~600	$1 \leq E \leq P \times 6$	$4 \leq P \leq D$	5 6 8
MBD02	13				5 6 8
	15	25~700			5 6 8 10

MBD02—D12—L80—E20—P8—N6

可加工

型号	L	E	P	N	可加工代码
代码	D	L	E	P	N
MBD01	12	25~600	1≤E≤P×6	4≤P≤D	5<E>8
MBD02	13	25~700	1≤E≤P×6	4≤P≤D	5 6 8
	15	25~700			5 6 8 10

MBD02—D12—L80—E20—P8—N6—LC



优惠价

数量	1~19	20~
价格	100%	另行报价

未税价(元)



无表面处理



有表面处理