

# 插头/插座


3.81mm间距

# 线对线型尼龙连接器

代码	类型	材质		阻燃等级
		胶壳	端头	
ZKY07	3.81mm间距	PA66	磷黄铜	UL94V-0
ZKY08				




插头  
ZKY07

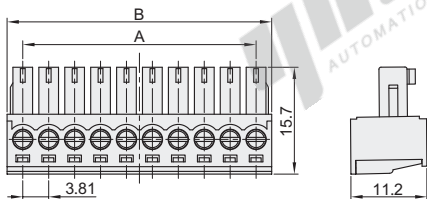

芯数	A	B
2	3.81	8.62
3	7.62	12.43
4	11.43	16.24
5	15.24	20.05
6	19.05	23.86
7	22.86	27.67
8	26.67	31.48
9	30.48	35.29
10	34.29	39.1

插座  
ZKY08

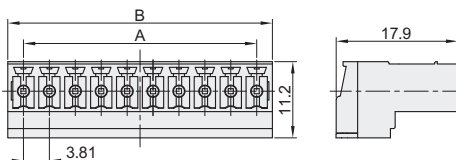

芯数	A	B
2	3.81	8.44
3	7.62	12.25
4	11.43	16.06
5	15.24	19.87
6	19.05	23.68
7	22.86	27.49
8	26.67	31.3
9	30.48	35.11
10	34.29	38.92

视角标准：第一视角

插头

代码	型号	芯数	端头间距	额定电压 (V)	额定电流 (A)	适配插座
ZKY07	ZKY07	2	3.81	300	8	ZKY08
		3				
		4				
		5				
		6				
		7				
		8				
		9				
		10				

插座

代码	型号	芯数	端头间距	额定电压 (V)	额定电流 (A)	适配插头
ZKY08	ZKY08	2	3.81	300	8	ZKY07
		3				
		4				
		5				
		6				
		7				
		8				
		9				
		10				



插头

型号	
代码	芯数
ZKY07	2
ZKY07	3

ZKY07—2

插座

型号	
代码	芯数
ZKY08	2
ZKY08	3

ZKY08—2

连接器

