


防震脚杯

调整块调节型·金属+橡胶底座型

轻载型/中载型/重载型

代码	类型	载荷	材质			表面处理		硬度
			外罩	螺杆	底部	外罩	螺杆	底部
WAM11	调整块 调节型	轻载型	SPCC	S45C	氟丁橡胶 (黑色)	密封胶漆 (黑色)	镀锌	肖氏A55±3
WAM16		中载型						肖氏A70±3
WAM21		重载型						

设备安装板必须开孔。

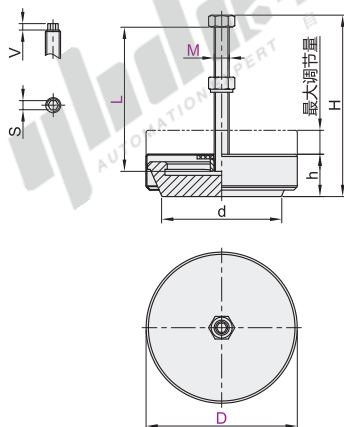

视角标准：第一视角

型号		M	L	螺距	H	h	d	S	V	最大 调整量	垂直承重 (Kg)	参考重量 (Kg/pcs)	
代码	D												
轻载型 WAM11	100	12	100	131	1.75	156	39	78	8	7.5	18	200	1.2
			125	231									
			100	137									
	150	16	125	162	2	162	47	114	10	8.5	19	500	1.7
			200	237									
			125	169									
中载型 WAM16	100	12	200	244	2.5	244	56	158	12	25	1000	2.2	
			100	128									
			125	153									
	150	16	200	228	1.75	228	39	78	8	7.5	18	500	1.2
			100	137									
			125	162									
重载型 WAM21	100	12	200	237	2	237	47	114	10	8.5	19	1000	1.7
			125	169									
			200	244									
	150	16	100	117	2.5	117	56	158	12	27	4000	2.3	
			125	142									
			200	217									
重载型 WAM21	100	12	100	121	1.75	121	35	78	8	7.0	22	1500	1.2
			125	146									
			200	221									
	150	16	125	153	2	153	42	114	10	8.5	24	2500	1.7
			200	228									
			200	228									



请按图示订货

型号	代码	D	M	L
WAM11	1	100	12	100
WAM16	1	150	16	125

WAM11—D100—M12—L100



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

1



Example
使用示例

旋转螺母，调整高度

