


卸料板导柱用配件

◀ 挡块/弹簧

☑ 挡块

代码	类型	材质	表面处理	附件
OFQ12	钢球用固定型	S45C	发黑	①螺钉 ②弹簧垫圈

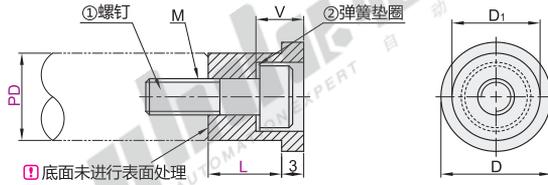

代码	型号		M	V	D	D ₁
	PD 适用导柱直径	L 最小单位1				
OFQ12	13	10~20	M5	6.5	15	12
	16		M6	8.5	17.3	15
	20	11~25	M8	11	24	19
	25			11~30	29	24

☑ 附件螺钉规格表

PD	L				
	10~13	14~18	19~23	24~28	29~30
13	TAC01-M5-L15	TAC01-M5-L20	TAC01-M5-L25		
16	TAC01-M6-L15	TAC01-M6-L20	TAC01-M6-L25		
20	TAC01-M8-L15	TAC01-M8-L20	TAC01-M8-L25	TAC01-M8-L30	
25	TAC01-M8-L15	TAC01-M8-L20	TAC01-M8-L25	TAC01-M8-L30	TAC01-M8-L35



请按图示订货

型号		L
代码	PD(适用导柱直径)	最小单位1
OFQ12	13	10~20
	16	11~25

OFQ12—PD13—L10



未税价(元)

优惠价		
数量	1~9	10~
价格	100%	另行报价




交货期		
数量	1~9	10~
价格	100%	另行报价

9

☑ 弹簧

代码	类型	材质
OFQ13	钢球衬套用	SWP-B

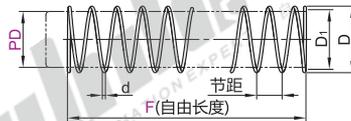

代码	型号		F 最小单位5	d	节距	D	D ₁
	PD 适用导柱直径	L 最小单位1					
OFQ13	10	30~80	0.6	5	11.7	10.5	
	13		0.7	6	14.9	13.5	
	16	30~90	0.8	12	18.3	16.5	
	20	35~90	1	14	22.5	20.5	
	25	40~90	1.2	14	27.9	25.5	

☑ 弹簧压紧长度/弹簧常数表

代码	PD	规格参数	F												
			30	35	40	45	50	55	60	65	70	75	80	85	90
OFQ13	10	压紧长度(mm)	4.8	5.4	6	6.6	7.2	7.8	8.4	9	9.6	10.2	10.8		
		弹簧常数(g/mm)	16	14	12	11	9	9	8	7	7	6	6		
	13	压紧长度(mm)	4.9	5.4	6.1	6.6	7.2	7.8	8.4	8.9	9.6	10.1	10.7		
		弹簧常数(g/mm)	17	15	13	11	10	9	8	8	7	7	6		
	16	压紧长度(mm)	3.2	3.4	3.7	4	4.2	4.5	4.8	5	5.3	5.6	5.8	6.1	6.4
		弹簧常数(g/mm)	32	26	23	22	20	19	16	15	14	13	12	12	11
20	压紧长度(mm)		4.7	5	5.3	5.6	5.8	6	6.5	7	7.4	7.7	8.1	8.5	
	弹簧常数(g/mm)		40	35	31	28	26	23	22	20	19	18	16	15	
25	压紧长度(mm)			6	6.3	6.6	7	7.4	7.9	8.4	8.7	9	9.3	9.6	
	弹簧常数(g/mm)			38	34	30	28	25	24	22	20	19	18	17	



请按图示订货

型号		F
代码	PD(适用导柱直径)	最小单位5
OFQ13	10	30~80
	13	30~90

OFQ13—PD10—F80



未税价(元)

优惠价		
数量	1~9	10~
价格	100%	另行报价



交货期		
数量	1~9	10~
价格	100%	另行报价

9