



排线


代码	类型	屏蔽	绝缘材质	线芯材质	护套颜色
ZLK71	信号电缆	不带屏蔽	PVC	镀锡铜	灰色
ZLK72					彩色

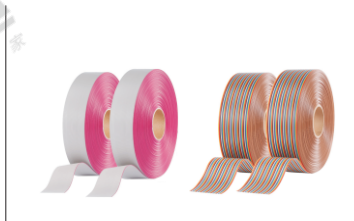

灰色
ZLK71



彩色
ZLK72



销售方式

卷



视角标准：第一视角

灰色

型号	长度(m) (整卷销售)	导体			线节间距 (mm)	宽度 (mm)	平均厚度 (mm)	
		AWG (mm ²)	结构 (根/mm)	直径 (mm)				
ZLK71	2	2000				2.54		
	3	800				3.81		
	4	600				5.08		
	5	500				6.35		
	6	450				7.62		
	7	400				8.89		
	8	350				10.16		
	9	153				11.43		
	10					12.7		
	12		28 (0.08)	7/0.127 镀锡 软铜丝	0.381	1.27±0.1	15.24	0.9
	14					17.78		
	16					20.32		
	20					25.4		
	26	76.2				33.02		
	30					38.1		
34					43.18			
40					50.8			
50					63.5			
60					76.2			
64					81.28			

彩色

型号	长度(m) (整卷销售)	导体			线节间距 (mm)	宽度 (mm)	平均厚度 (mm)	
		AWG (mm ²)	结构 (根/mm)	直径 (mm)				
ZLK72	5					6.35		
	6	500				7.62		
	7					8.89		
	8					10.16		
	9					11.43		
	10					12.7		
	12					15.24		
	14					17.78		
	16		28 (0.08)	7/0.127 镀锡 软铜丝	0.381	1.27±0.1	20.32	0.95
	20					25.4		
	26	61				33.02		
	30					38.1		
	34					43.18		
	40					50.8		
	50					63.5		
60					76.2			
64					81.28			

① 颜色依次排列顺序为：棕、红、橙、黄、绿、蓝、紫、灰、白、黑(依次循环)。

技术参数

导体电阻	237Ω/km (20°C)
绝缘电阻	0.75MΩ/km (20°C)
额定电压	300V
耐电压	3000V漏电流0.5mAh
耐燃性	VW-1
温度范围	-20°C~+105°C



型号	长度(m)
ZLK71	2000
ZLK72	800

ZLK71-2-2000