

压缩弹簧

滚珠滑套用

代码	类型	材质		表面处理	弹簧常数公差
		国标	相当		
YBSWP	滚珠滑套用	琴钢丝	SWP-B	发黑	±10%




- 特点：配套滚珠滑套用，应用于模具、自动化线及有缓冲回弹需求的产品。
- ① 两端均未进行磨削加工。
- ② 使用次数为100万次(参考)。
- ③ 此系列为内径基准型弹簧，以保证内径公差进行生产，内径为正公差，适合配轴使用，外径仅做参考(按正公差)，选型时请注意。

D、尺寸公差

D ₁	公差
10.5以下	+0.5
13.5以上	+0.8

L尺寸公差

L	公差
50以下	±1.5
55以上	±2.5

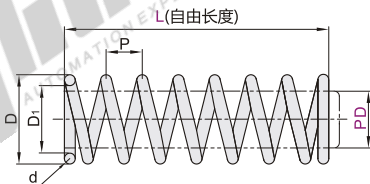

代码	型号		D	D ₁	d	P	压紧长度	弹簧常数 g/mm
	PD	L						
YBSWP	10	30	11.7	10.5	0.6	5	4.8	16
		35					5.4	14
		40					6.0	12
		45					6.6	11
		50					7.2	9
		55					7.8	8
		60					8.4	8
		65					9.0	7
		70					9.6	7
		75					10.2	6
80	10.8	6						
YBSWP	13	30	14.9	13.5	0.7	6	4.9	17
		35					5.4	15
		40					6.1	13
		45					6.6	11
		50					7.2	10
		55					7.8	9
		60					8.4	8
		65					8.9	8
		70					9.6	7
		75					10.1	7
80	10.7	6						
YBSWP	16	30	18.3	16.5	0.8	12	3.2	32
		35					3.4	26
		40					3.7	23
		45					4.0	22
		50					4.2	20
		55					4.5	19
		60					4.8	16
		65					5.0	15
		70					5.3	14
		75					5.6	13
80	5.8	12						
85	6.1	12						
90	6.4	11						

代码	型号		D	D ₁	d	P	压紧长度	弹簧常数 g/mm
	PD	L						
YBSWP	20	35	22.5	20.5	1	14	4.7	40
		40					5.0	35
		45					5.3	31
		50					5.6	28
		55					5.8	26
		60					6.0	23
		65					6.5	22
		70					7.0	20
		75					7.4	19
		80					7.7	18
85	8.1	16						
90	8.5	15						
YBSWP	25	40	27.9	25.5	1.2	14	6.0	38
		45					6.3	34
		50					6.6	30
		55					7.0	28
		60					7.4	25
		65					7.9	24
		70					8.4	22
		75					8.7	20
		80					9.0	19
		85					9.3	18
90	9.6	17						

氮气弹簧 C4



型号			
代码	PD	L	D
YBSWP	10	30	11.7
		35	
		40	

YBSWP—PD10—L30



优惠价		
数量	1~9	10~
价格	100%	另行报价



1

