

中载/重载直线导轨用 ▶ 直线导轨夹具


代码	类型	材质			表面处理		
		①主体	②左右螺丝	③夹紧块	①主体	②左右螺丝	③夹紧块
ICG91	把手型	S45C	SCM435	S45C	无电解镀镍	发黑	—
ICG92	旋钮型						

① 仅适用于水平方向，请勿用于垂直方向上的位置保持。


② 请根据中载/重载直线导轨的H尺寸配合使用。



把手型
ICG91

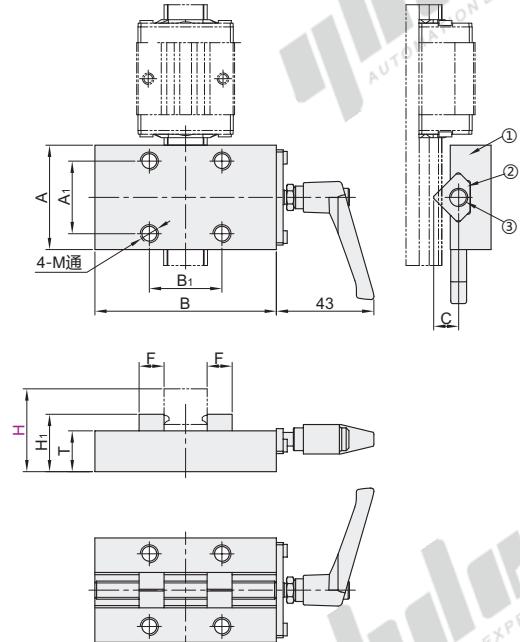

旋钮型
ICG92

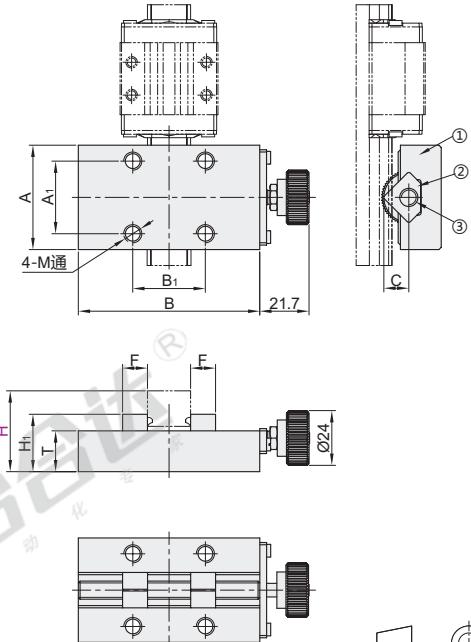

视角标准：第一视角

直线导轨

E3

型号	A	B	A ₁	B ₁	F	T	H ₁	C	M	夹紧块调整范围	紧固扭矩(N·m)		保持力(N)		
											ICG91	ICG92	ICG91	ICG92	
把手型 ICG91	24	32	44	24	24		10.5	16.3	9.5	M4	10~22				
	28	35	50	25	25		11.5	17.3		M5	14~28				
	30	38	54	28	28	10	11	18.3	11		15~30				
	33	42	62	26	26		14	19.8	9.5	M6	16~40				
	36	42	60	30	30		13	20.3	11		17~36				
	42	46	80	32	32		18	25.3		M8	21~56				
旋钮型 ICG92	24	32	35	35								2.5	0.7	400	100
	28	35	38	38											
	30	38	42	42											
	33	42	54	54											
	36	42	60	60											
	42	46	80	80											



请按图示订货

型号	H	A
ICG91	24	32
ICG92	28	35
ICG92	30	38

ICG91— H28



优惠价
未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期
10

EX Example
使用示例



直线导轨夹具

① 用于固定滑轨、机器定位及防止振动。