


密封塞 组合密封垫圈

- 内六角带外螺纹型
- 螺钉头部专用型

密封塞

代码	类型	材质		硬度(邵氏)	使用温度范围
		主体	O型圈	橡胶	
XUC01	内六角带外螺纹型	SUS304	氟橡胶	HA75	-10~200°C

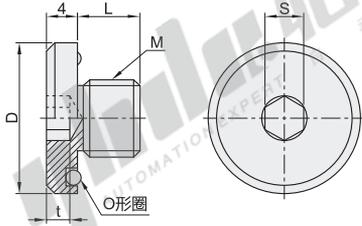

型号	M	L	D	S	t	O型圈	推荐紧固扭矩 (N·M)	重量 (g)	
XUC01	8	M8×1.0	7	16	5	3.5	XTC21-10	10.9	4
	10	M10×1.0	8	19.5		4	XTC21-12.5	13.7	7
	12	M12×1.5	12	21	6	5	XTC21-14	19.2	14
	14	M14×1.5		23		XTC21-16	27.4	19	
	16	M16×1.5	25	8	6	XTC21-18	44.5	25	



型号	
代码	规格
XUC01	10
	12

XUC01-10




优惠价	
数量	1~100 101~
价格	100% 另行报价



组合密封垫圈

代码	类型	材质		表面处理		硬度(邵氏)	使用温度范围
		金属	橡胶	金属	橡胶	橡胶	
XUC11	螺钉头部专用型	低碳钢	丁腈橡胶	镀黄铜		HA70±5	-25~80°C

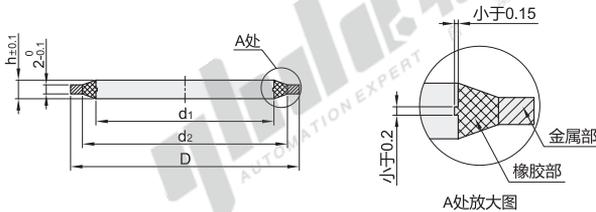

型号	公称直径	d1	d1公差	d2*	d2公差	D	D公差	h	孔d2允许偏心	适用螺纹尺寸
XUC11	8	8.4		10		14		2.7	0.1	M8
	10	10.4		12		16	0 -0.24			M10 (G1/8")
	12	12.4	±0.12	14	+0.24 0	18				M12
	14	14.4		16		20				M14 (G1/4")
	16	16.4		18		22				M16
	18	18.4		20		25	0 -0.28			M18 (G3/8")
	20	20.5		23		28		M20		
	22	22.5		25	+0.28 0	30		M22 (G1/2")		
	24	24.5	±0.14	27		32		M24		
	27	27.5		30		35		M27 (G3/4")		
	30	30.5		33		38	0 -0.34	M30		
	33	33.5		36		42		M33 (G1")		
	36	36.6		40		46		M36		
	39	39.6		43	+0.34 0	50		M39		
	42	42.6	±0.17	46		53		M42 (G1 1/4")		
	45	45.6		49		56		M45		
	48	48.7		52		60	0 -0.40	M48		
	52	52.7		56	+0.40 0	66		M52		
60	60.7	±0.20	64		75		M60 (G2")			

*带*尺寸仅为参考。



型号	
代码	公称直径
XUC11	10
	12

XUC11-10



优惠价	
数量	1~100 101~
价格	100% 另行报价

