




圆筒螺帽型 两端内螺纹型

实心滚珠花键



代码	类型		D公差	材质				硬度
				花键轴		花键套		
				国标	相当	国标	相当	
SQF31 E-SQF31	圆筒螺帽型	标准型 经济型	h7	55	S55C	GCr15	SUJ2	高频淬火58~62HRC

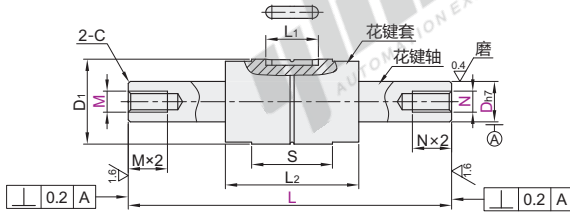

6.3/

视角标准：第一视角

导
向
轴

A1

型号	花键轴						花键套						基本额定负载				容许静力矩		重量		
	代码	D _{h7}	L 最小单位1	M-N	滚珠 列数	C 倒角	D ₁	L ₁	L ₂	S	Q 油孔	键槽尺寸		C	C ₀	C _T	C _{OT}	M _{A1}	M _{A2}	花键套 g	花键轴 kg/m
												b	t								
标准型 SQF31	6	0.015	60~500	3	2	0.5	14	10.5	25	16.7	1	2.5	1.2	137	225	0.46	0.76	0.39	3.48	14	0.22
	8			16			27	15.7	3	1.5	0.6	0.99	3.82	16	0.39						
	10	21	13	33			20	1.5	285	397	1.62	2.25	0.95	8.53	37	0.6					
	13	24	15	36			23	3	396	540	2.89	3.94	1.5	12.46	52	1.03					
经济型 E-SQF31	16	0.018	60~700	4 5 6 8	4	1.0	31	17.5	50	34	2	3.5	2	545	849	4.77	7.43	3.71	26.09	130	1.56
	20			35			29	56	39.7	2	724	1109	7.9	12.09	5.53	38	188	2.44			
	25	42	36	71			50.3	3	1003	1593	21.99	43.01	10.35	68.59	285	3.8					
	30	47	42	80			60	3	1160	1980	30.26	62.93	15.68	93.27	395	5.49					
	40	64	52	100			70	4	2972	4033	105.37	176.05	36.59	264.34	843	9.69					
50	80	58	125	91	4	4086	5615	179.89	304.35	51.58	428.72	1758	15.19								

① 容许静力矩M_{A1}为使用1个螺帽时的数值；M_{A2}为使用2个紧密接触的螺帽时的数值。



请按图示订货

型号		L	M	N
代码	D			
SQF31	6	60~500	3 4 5	3 4 5
E-SQF31	8			

SQF31—D6—L60—M3—N3



未税价(元)

优惠价	
数量	1~5 6~
价格	100% 另行报价



交货期

5

