

代码	类型	螺纹	材质		硬度	表面处理	强度等级
			国标	相当			
TAF01	薄圆柱头型	全牙	粗牙	ML40Cr	—	发黑	12.9
TAF02				0Cr18Ni9 SUS304	—	—	A2-70
TAF03		全牙/半牙	粗牙	35CrMo SCM435	32~39HRC	发黑	10.9
TAF04				SUS316L	—	—	A4-80


TAF01



TAF02



① 可以直接使用在以往会被六角螺栓头阻碍的地方。

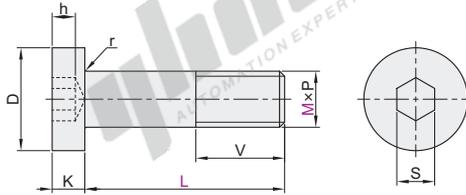

代码	抗拉强度 (N/mm ²)	0.2%屈服强度 (N/mm ²)	耐腐蚀性	非磁性
TAF01	1040	900	△	×
TAF02	800	640	◎	◎

优 ◎ 较差 × 差 △



视角标准：第一视图

ML40Cr

型号	代码	M	L	P 螺距	V	D		K		S		h		r (min)
						max	min	max	min	max	min	max	min	
TAF01	2.5	6		0.45		4.5	4.32	1.6	1.46	1.56	1.52	—	1	0.1
	3	4 5 6 8 10 12 14 16 20		0.5		5.5	5.32	2	1.86	2.1	2.02	1.62	1.38	0.1
	4	6 8 10 12 16 20		0.7		7	6.78	2.8	2.66	2.6	2.52	2.42	2.18	0.2
	5	8 10 12 16 20 25		0.8		8.5	8.28	3.5	3.32	3.1	3.02	2.82	2.58	0.2
	6	8 10 12 16 20 25 30 35 40		1		10	9.78	4	3.82	4.12	4.02	3.12	2.88	0.25
	8	10 12 16 18 20 25 30 35 40 45 50	全牙	1.25		13	12.73	5	4.82	5.14	5.02	3.95	3.65	0.4
	10			1.5		16	15.73	6	5.82	7.175	7.025	4.65	4.35	0.4
	10A	16 20 25 30 35 40 45 50		1.75		18	17.73	7	6.78	8.175	8.025	5.15	4.85	0.6
	12	16 20 25 30 35 40 45 50		2		21	20.67	8	7.78	10.175	10.025	5.45	5.15	0.6
	14	25 30 35 40 45 50		2		24	23.67	9	8.78	12.212	12.032	5.65	5.35	0.6
16	25 30 35 40 45 50 55 60		2											

SUS304

型号	代码	M	L	P 螺距	V	D		K		S		h		r (min)
						max	min	max	min	max	min	max	min	
TAF02	2	4 5 6 8		0.4		3.8	3.62	1.4	1.16	1.36	1.32	—	0.7	0.1
	2.5	4 5 6 8 10		0.45		4.5	4.32	1.6	1.46	1.56	1.52	—	1	0.1
	3	4 5 6 8 10 12 14 16 20		0.5		5.5	5.32	2	1.86	2.1	2.02	1.62	1.38	0.1
	4	6 8 10 12 16 20 25 30 35 40		0.7		7	6.78	2.8	2.66	2.6	2.52	2.42	2.18	0.2
	5	8 10 12 16 20 25 30 35 40		0.8		8.5	8.28	3.5	3.32	3.1	3.02	2.82	2.58	0.2
	6	8 10 12 16 20 25 30 35 40 45 50		1		10	9.78	4	3.82	4.12	4.02	3.12	2.88	0.25
	8	10 12 16 20 25 30 35 40 45 50	全牙	1.25		13	12.73	5	4.82	5.14	5.02	3.95	3.65	0.4
	10	16 20 25 30 35 40 45		1.5		16	15.73	6	5.82	7.175	7.025	4.65	4.35	0.4
	12	16 20 25 30 35		1.75		18	17.73	7	6.78	8.175	8.025	5.15	4.85	0.6

SCM435

型号	代码	M	L	P 螺距	V	D		K		S		h		r (min)
						max	min	max	min	max	min	max	min	
TAF03	3	4 5 6 8 10 12 16 20		0.5	全牙	5.5	5.32	2	1.86	2.1	2.02	1.62	1.38	0.1
	4	5 6 8 10 12 16 20 25		0.7	全牙	7	6.78	2.8	2.66	2.6	2.52	2.42	2.18	
	5	5 6 8 10 12 16 20 25 30		0.8	全牙	8.5	8.28	3.5	3.32	3.1	3.02	2.82	2.58	0.2
	6	8 10 12 16 20 25 30 35 40 45		1	全牙	10	9.78	4	3.82	4.12	4.02	3.12	2.88	0.25
	8	10 12 16 20 25 30 35 40 45 50		1.25	全牙	13	12.73	5	4.82	5.14	5.02	3.95	3.65	0.4

SUS316L

型号	代码	M	L	P 螺距	V	D		K		S		h		r (min)
						max	min	max	min	max	min	max	min	
TAF04	3	4 5 6 8 10 12 16 20		0.5	全牙	5.5	5.32	2	1.86	2.1	2.02	1.62	1.38	0.1
	4	5 6 8 10 12 16 20 25		0.7	全牙	7	6.78	2.8	2.66	2.6	2.52	2.42	2.18	
	5	5 6 8 10 12 16 20 25 30		0.8	全牙	8.5	8.28	3.5	3.32	3.1	3.02	2.82	2.58	0.2
	6	8 10 12 16 20 25 30 35 40 45		1	全牙	10	9.78	4	3.82	4.12	4.02	3.12	2.88	0.25

型号		
代码	M	L
(A)F01	3	5 6 8 10 12
(A)F01	(4)	6 8 10 (12)

请按图示订货 TAF01—M4—L12



● 优惠价
数量 1~49 50~
价格 100% 另行报价



交货期
7

