


AGV系列重型脚轮(单轮)

固定型

容许载荷400~1100kg



代码	支架				轮部				
	类型	材质	表面处理	刹车类型	代号	材质	颜色	硬度	轴承
CFN35	固定型	Q235A	烤漆 (深灰色)	—	NQ	MC尼龙	米白色	80D	双滚珠
					UA	铁芯聚氨酯	橘黄色	95A	
					UJ	防静电 铁芯聚氨酯	橘黄色	93A	

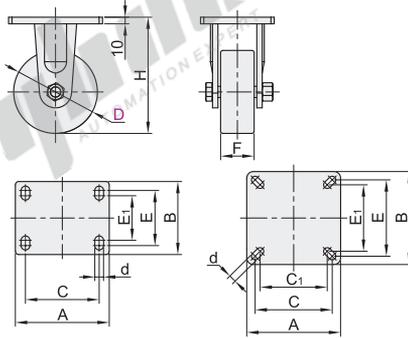

D: 125/150/200

D: 125A/150A/200A

视角标准：第一视角

型号 代码	D	轮部 代号	H	F	A	B	C	C ₁	E	E ₁	d	容许载荷(kg)			参考重量(kg)	
												NQ	UA	UJ	NQ	UA/UJ
CFN35	125	NQ	175	50	140	110	110	—	83	67	13	650	600	400	2.4	2.7
	150		900									800	500	4.2	4.8	
	200		1100									1000	700	4.9	5.9	
	125A	UJ	175			650	600	400	2.1	2.4						
	150A		900			800	500	3.9	4.5							
	200A		1100			1000	700	4.6	5.6							

请按图示订货

型号	轮部代号
CFN35	NQ
125	UA
150	UA

CFN35—D125—NQ

可选加工

型号	轮部代号	可选加工代码
CFN35	NQ	DQ
125	UA	DQ
150	UA	DQ

CFN35—D125—NQ—DQ

未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期
15

可选加工

代码	技术说明																																				
DQ	<p>增加防护罩</p> <table border="1"> <thead> <tr> <th colspan="5">选型方法 DQ</th> </tr> <tr> <th>D</th> <th>L</th> <th>W</th> <th>h</th> <th>h₁</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>152</td> <td rowspan="3">80</td> <td>30</td> <td>51.5</td> </tr> <tr> <td>150</td> <td>176</td> <td>35</td> <td>66.5</td> </tr> <tr> <td>200</td> <td>226</td> <td>40</td> <td>94.4</td> </tr> <tr> <td>125A</td> <td>152</td> <td rowspan="3">80</td> <td>30</td> <td>51.5</td> </tr> <tr> <td>150A</td> <td>176</td> <td>35</td> <td>66.5</td> </tr> <tr> <td>200A</td> <td>226</td> <td>40</td> <td>94.4</td> </tr> </tbody> </table>	选型方法 DQ					D	L	W	h	h ₁	125	152	80	30	51.5	150	176	35	66.5	200	226	40	94.4	125A	152	80	30	51.5	150A	176	35	66.5	200A	226	40	94.4
选型方法 DQ																																					
D	L	W	h	h ₁																																	
125	152	80	30	51.5																																	
150	176		35	66.5																																	
200	226		40	94.4																																	
125A	152	80	30	51.5																																	
150A	176		35	66.5																																	
200A	226		40	94.4																																	



AGV系列重型脚轮(单轮)


平底活动型

容许载荷400~1100kg



代码	支架				轮部					支架转盘
	类型	材质	表面处理	刹车类型	代号	材质	颜色	硬度	轴承	
CFN36	平底活动型	Q235A	烤漆(深灰色)	—	NQ	MC尼龙	米白色	80D	双滚珠	轴承结构
CFN37				五金双刹	UJ	防静电铁芯聚氨酯	橘黄色	95A		




无刹
CFN36






D: 125/150/200




五金双刹
CFN37



D: 125/150/200



D: 125A/150A/200A



视角标准：第一视角

代码	型号	D	轮部代号	H	F	A	B	C	C ₁	E	E ₁	d	容许载荷(kg)					参考重量(kg)			
													R					CFN36		CFN37	
													CFN36	CFN37	NQ	UA	UJ	NQ	UA/UJ	NQ	UA/UJ
无刹 CFN36	125	175	NQ	50	140	110	110	—	83	67	13	101	161	650	600	400	3.6	4	3.9	4.3	
	150	201										117	165	900	800	500	5.7	6.3	6	6.6	
	200	249										150	190	1100	1000	700	6.5	7.5	6.8	7.8	
五金双刹 CFN37	125A	175	UJ	50	140	140	115	100	115	100	11	101	161	650	600	400	3.3	3.7	3.6	4	
	150A	201										117	165	900	800	500	5.4	6	5.7	6.3	
	200A	249										150	190	1100	1000	700	6.2	7.2	6.5	7.5	



请按图示订货

型号	代码	D	轮部代号
CFN36—D125—NQ	CFN36	125	NQ
	CFN36	150	UA

可选加工

型号	代码	D	轮部代号	可选加工代码
CFN36—D125—NQ—DQ	CFN36	125	NQ	DD
	CFN36	150	UA	DD



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

15



可选加工

代码	技术说明																																				
DQ	增加防护罩 无刹 CFN36	五金双刹 CFN37																																			
	选型方法 DQ <table border="1"> <thead> <tr> <th>D</th> <th>L</th> <th>W</th> <th>h</th> <th>h₁</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>152</td> <td></td> <td>30</td> <td>51.5</td> </tr> <tr> <td>150</td> <td>176</td> <td></td> <td>35</td> <td>66.5</td> </tr> <tr> <td>200</td> <td>226</td> <td></td> <td>40</td> <td>94.4</td> </tr> <tr> <td>125A</td> <td>152</td> <td>80</td> <td>30</td> <td>51.5</td> </tr> <tr> <td>150A</td> <td>176</td> <td></td> <td>35</td> <td>66.5</td> </tr> <tr> <td>200A</td> <td>226</td> <td></td> <td>40</td> <td>94.4</td> </tr> </tbody> </table>		D	L	W	h	h ₁	125	152		30	51.5	150	176		35	66.5	200	226		40	94.4	125A	152	80	30	51.5	150A	176		35	66.5	200A	226		40	94.4
D	L	W	h	h ₁																																	
125	152		30	51.5																																	
150	176		35	66.5																																	
200	226		40	94.4																																	
125A	152	80	30	51.5																																	
150A	176		35	66.5																																	
200A	226		40	94.4																																	

