


# 螺纹圆形连接器

## 方法兰插座 防水型

| 代码    | 类型        | 连接方式 | 材质  |                    |     | 表面处理 |     |
|-------|-----------|------|-----|--------------------|-----|------|-----|
|       |           |      | 外壳  | 绝缘体                | 接触体 | 外壳   | 接触体 |
| ZIX68 | 防水型 方法兰插座 | 螺纹连接 | 锌合金 | 热塑塑料PPS (耐高温260°C) | 铜   | 镀铬   | 镀金  |

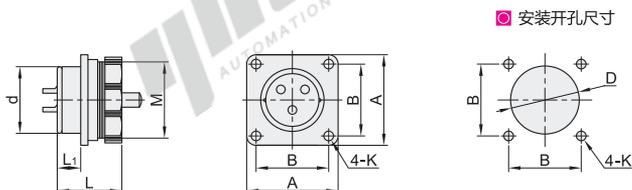

视角标准：第一视角

| 型号    |              | 规格 | 芯数    | 端头             | d    | M     | L <sub>1</sub> | L    | B  | A  | D    | K   | 额定电流 (A) | 工作电压 (V) | 耐压 (V) | 接触电阻 (MΩ) | 绝缘电阻 (MΩ) | 适配插头代码 |     |    |      |    |  |  |  |
|-------|--------------|----|-------|----------------|------|-------|----------------|------|----|----|------|-----|----------|----------|--------|-----------|-----------|--------|-----|----|------|----|--|--|--|
| 代码    | 外壳形状         |    |       |                |      |       |                |      |    |    |      |     |          |          |        |           |           |        |     |    |      |    |  |  |  |
| ZIX68 | Z<br>(方法兰插座) | 16 | 2     | J(插针)<br>K(插孔) | 15.8 | M18×1 | 9.7            | 21.6 | 20 | 26 | 16.5 | 3.2 | 10       | AC500    | AC1500 | 2.5       | 2000      | ZIX48  |     |    |      |    |  |  |  |
|       |              |    | 3     |                |      |       |                |      |    |    |      |     | 5        | 5        | 5      |           |           |        |     |    |      |    |  |  |  |
|       |              |    | 4     |                |      |       |                |      |    |    |      |     | 7        | 5        | 5      |           |           |        |     |    |      |    |  |  |  |
|       |              |    | 5     |                |      |       |                |      |    |    |      |     | 9        | 5        | 5      |           |           |        |     |    |      |    |  |  |  |
|       |              |    | 6     |                |      |       |                |      |    |    |      |     | 10       | 5        | 5      |           |           |        |     |    |      |    |  |  |  |
|       |              |    | 7     |                |      |       |                |      |    |    |      |     | 2        | 25       | 1      |           |           |        |     |    |      |    |  |  |  |
|       |              |    | 8     |                |      |       |                |      |    |    |      |     | 3        | AC500    | AC1500 | 2.5       |           |        |     |    |      |    |  |  |  |
|       |              |    | 9     |                |      |       |                |      |    |    |      |     | 4        | 10       | 5.25   | 5         |           |        |     |    |      |    |  |  |  |
|       |              |    | 10    |                |      |       |                |      |    |    |      |     | 5        | 10       | 2.5    | 5         |           |        |     |    |      |    |  |  |  |
|       |              |    | 11    |                |      |       |                |      |    |    |      |     | 6        | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 12    |                |      |       |                |      |    |    |      |     | 7        | 10       | AC500  | AC1500    |           |        | 2.5 |    |      |    |  |  |  |
|       |              |    | 13    |                |      |       |                |      |    |    |      |     | 8        | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 14    |                |      |       |                |      |    |    |      |     | 9        | 25       | 1      |           |           |        |     |    |      |    |  |  |  |
|       |              |    | 15    |                |      |       |                |      |    |    |      |     | 10       | 10       | AC500  | AC1500    |           |        | 2.5 |    |      |    |  |  |  |
|       |              |    | 16    |                |      |       |                |      |    |    |      |     | 11       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 17    |                |      |       |                |      |    |    |      |     | 12       | 7        | 25     | 1         |           |        |     |    |      |    |  |  |  |
|       |              |    | 18    |                |      |       |                |      |    |    |      |     | 13       | 10       | AC500  | AC1500    |           |        | 2.5 |    |      |    |  |  |  |
|       |              |    | 19    |                |      |       |                |      |    |    |      |     | 14       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 20    |                |      |       |                |      |    |    |      |     | 15       | 27.8     | M30×1  | 9.8       |           |        | 30  | 36 | 28.5 | 10 |  |  |  |
|       |              |    | 21    |                |      |       |                |      |    |    |      |     | 16       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 22    |                |      |       |                |      |    |    |      |     | 17       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 23    |                |      |       |                |      |    |    |      |     | 18       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 24    |                |      |       |                |      |    |    |      |     | 19       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
|       |              |    | 25    |                |      |       |                |      |    |    |      |     | 20       | 5        | AC400  | AC1200    |           |        | 5   |    |      |    |  |  |  |
| 26    | 21           | 5  | AC400 | AC1200         | 5    |       |                |      |    |    |      |     |          |          |        |           |           |        |     |    |      |    |  |  |  |



| 型号    |      |    |    |       |
|-------|------|----|----|-------|
| 代码    | 外壳形状 | 规格 | 芯数 | 端头    |
| ZIX68 | Z    | 16 | 4  | J(插针) |
|       |      |    | 5  | K(插孔) |

请按图示订货 ZIX68-Z-16-4-K

### 性能表

|      |             |
|------|-------------|
| 连接方式 | 螺纹连接        |
| 接线方式 | 焊接          |
| 接插次数 | 500次        |
| 温度范围 | -40°C~+85°C |
| 防护等级 | IP67        |