


高品质 裸压着端子

叉形
SNB系列

代码	类型	材质	表面处理	焊接方式
ZIP22	裸压着端子 叉形	紫铜	镀锡	接缝焊银

特点

- 电解铜镀锡，导电性良好；
- 无缝焊接使导体和端子间具有良好的接触性和拉伸强度。

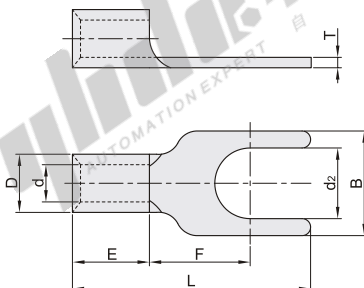

视角标准：第一视角

销售方式	每袋数量
袋	见参数表

型号		销售方式 (PCS/袋)	适用电线规格		外形尺寸(mm)								最大电流 I _{max}	适用压接 工具
代码	压接规格		截面积(mm²)	AWG	d ₂	B	F	L	E	D	d	T		
ZIP22	3	无指定 (1000PCS/袋)	0.5~1.5	22~16	3.2	5.7							19A	ZIQ07-8 (见官网)
	3.5				3.7	6.4								
	3.5L													
	4													
	4M				4.3	7.2	6.5	16						
	4L					8.1			4.8	3.4	1.8	0.7		
	5				5.3	9.5								
	5L													
	6S				6.4									
	6L					12	11	22						
	8S				8.4									
	3	100 (100PCS/袋)	1.5~2.5	16~14	3.2	5.7							27A	ZIQ07-8 (见官网)
	3.5				3.7	6								
	3.5L													
	4					6.4								
	4M				4.3	7.2	6.5	16		4.8	4	2.4		
	4L					8.1								
	5				5.3	9.5								
	5L													
	6S				6.4	12	11	22						
	6L													
	4	无指定 (500PCS/袋)	2.5~4	14~12	4.3	8	7.7	18.3					37A	—
	5				5.3				6	5	3	1		
	6				6.4	12	9.1	21.5						
	10				10.5	17.5	12.5	26.5						
	3.5				3.7	8.3								
	4				4.3		7	18.5						
	4L													
	5				5.3	9			6	5.5	3.5	1		
	5L													
	6S				6.4	12	12	24.7						
	6L													
	8	无指定 (500PCS/袋)	4~6	12~10	8.4	14	11.5	23.7					48A	ZIQ07-8 (见官网)
	4				4.3	9	7.6	20.8						
	5				5.3				8.5	7.2	4.8	1.2		
	5L													
	6				6.4	12	9.2	23.8						
	6L													
	8				8.4	14	11.5	23.7						
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	12	24.7						
	6L													
	8	无指定 (250PCS/袋)	6~10	8	8.4	14	11.5	23.7					62A	—
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	9.2	23.8						
	6L													
	8				8.4	14	11.5	23.7						
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	9.2	23.8						
	6L													
	8	无指定 (250PCS/袋)	10~16	6	8.4	14	11.5	23.7					88A	—
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	9.2	23.8						
	6L													
	8				8.4	14	11.5	23.7						
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	9.2	23.8						
	6L													
	8	无指定 (250PCS/袋)	16~25	4	8.4	16.5	13.5	33.5					115A	—
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	9.2	23.8						
	6L													
	8				8.4	16.5	13.5	33.5						
	4				4.3	9	8.1	20.8						
	5				5.3									
	5L													
	6				6.4	12	9.2	23.8						
	6L													

压着端子



请按图示订货

型号		销售方式 (PCS/袋)
代码	压接规格	
ZIP22	1.25	无指定(1000PCS/袋) 100(100PCS/袋)
	3.5	

ZIP22 - 1.25 - 3