


高品质 绝缘压着端子

◀ 叉形 · PVC外套


代码	类型	材质	绝缘外套	表面处理	焊接方式
ZKT32	绝缘压着端子	紫铜	PVC	镀锡	接缝焊银

特点

- 采用PVC护套绝缘性能良好，耐久不易老化。

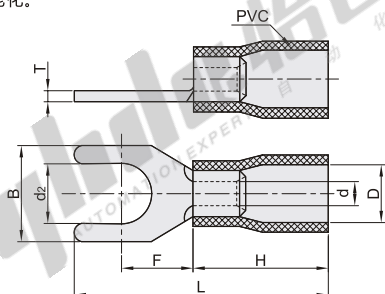

销售方式	每袋数量
袋	见参数表



型号		螺丝规格	销售方式 (PCS/袋)	适用电线规格		颜色	外形尺寸(mm)								最大电流 Imax
代码	压接规格			截面面积(mm²)	AWG		d2	B	F	L	H	D	d	T	
ZKT32		3					3.2	5.7							
		3.5					3.7								
		3.5L					6.4								
		4					4.3	7.2	6.5	21.2					
	1.25	4L		0.5~1.5	22~16	红		8.1				4.2	1.7	0.7	19A
		5					5.3								
		5L					6.4								
		6S					9.5								
		6L					12	11	27.2						
		8	无指定 (1000PCS/袋)				8.4	13.5	11.5	26.7	10				
		3					3.2	5.7							
		3.5					3.7								
		3.5L					6								
		4	100 (100PCS/袋)				6.4								
	2	4L		1.5~2.5	16~14	蓝	4.3	7.2	6.5	21.2					
		5					8.1					4.7	2.3	0.8	27A
		5L					5.3								
		6S					9.5								
		6L					12	11	27.2						
		8					8.4	13.5	11.5	27					
	3.5	4					4.3	8	7.7	25.3	13	6.2	2.9	1	37A
		5		2.5~4	14~12	黑	5.3								
		6					8.4	12	9.1	28.5					
		3.5					3.7								
		4					8.3								
		4L	无指定 (500PCS/袋)				4.3		7	25.5					
	5.5	5		4~6	12~10	黄	5.3	9			13	6.5	3.4	1	48A
		6	100 (100PCS/袋)				6.4								
		6L					12	12	31.7						
		8					8.4	14	11.5	30.7					
		4					4.3		7.6						
	8	5	无指定 (100PCS/袋)	6~10	8	红	5.3	9	8.1	28.3	16	8	4.5	1.2	62A
		6					6.4	12	9.2	31.3					
		4					4.3								
	14	5		10~16	6		5.3	11	9.5	36.5	21.5	11	5.8	1.4	88A
		6	无指定 (50PCS/袋)			蓝	6.4								
		5					5.3								
	22	6		16~25	4		6.4	11	9.5	39.3	23.5	13	7.7	1.6	115A
		8					8.4	16.5	13.5	45					



型号		螺丝规格	销售方式 (PCS/袋)
代码	压接规格		
KT32	1.25	8	无指定(1000PCS/袋)
ZKT32	2	3	100(100PCS/袋)

ZKT32 - 1.25 - 8