


U形槽 开口式夹紧固定

圆皮带用滑轮

代码	类型	材质		表面处理
		国标	相当	
ENS81	开口式夹紧固定	45	S45C	发黑
ENS82		LF2	A5052	喷细砂本色阳极氧化

① 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。

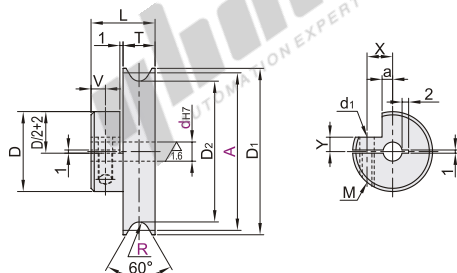

① M=M3时， $d_1=\varnothing 3.3$
M=M4时， $d_1=\varnothing 4.3$

视角标准：第一视角

型号		R	dH7选择	D	D ₁	D ₂	L	T	V	X	Y	a	M	适用皮带直径
代码	A													
ENS81	20	1	4 5	16	22	18	11	5	2.5	5	4.2	2	M3	2
	30		4 5 6 6.35 8	20	32	28								
	40		4 5 6 6.35 8	20	42	38								
	30		4 5 6 6.35 8	20	32	27								
	40	1.5	4 5 6 6.35 8	20	42	37	16		4.5	9	6.2	5.2	M4	3
	45		4 5 6 6.35 8 10 11 12	25	47	42								
	60		4 5 6 6.35 8 10 11 12	25	62	57								
	23				25	19								
	28	2	4 5 6 6.35 8	20	30	24	16		2.5	7	5	4	M3	
	30		4 5 6 6.35 8	20	32	26								
	40		4 5 6 6.35 8	20	42	36								
	45		4 5 6 6.35 8	20	47	41								
	48	2.5	4 5 6 6.35 8 10 11 12	25	50	44	20		4.5	9	6.2	5.2	M4	4
	60		4 5 6 6.35 8 10 11 12	25	62	56								
	80		4 5 6 6.35 8	20	82	76								
	28		4 5 6 6.35 8	20	30	23								
	40	3	4 5 6 6.35 8	20	42	35	16	10	2.5	7	5	4	M3	
	48		4 5 6 6.35 8	20	50	43								
	50		4 5 6 6.35 8 10 11 12	25	52	45								
	60		4 5 6 6.35 8 10 11 12	25	62	55								
ENS82	75	2.5	4 5 6 6.35 8 10 11 12	25	77	70	20		4.5	9	6.2	5.2	M4	5
	80		4 5 6 6.35 8 10 11 12	25	82	75								
	28		4 5 6 6.35 8	20	30	22								
	38		4 5 6 6.35 8	20	40	32								
	48	3	4 5 6 6.35 8	20	50	42	20		2.5	7	5	4	M3	
	50		4 5 6 6.35 8	20	52	44								
	58		4 5 6 6.35 8 10 11 12	25	60	52								
	60		4 5 6 6.35 8 10 11 12	25	62	54								
	75	3	4 5 6 6.35 8 10 11 12	25	77	69	20		4.5	9	6.2	5.2	M4	6
	95		4 5 6 6.35 8 10 11 12	25	97	89								
	100		4 5 6 6.35 8	25	102	94								



型号		R	dH7选择
代码	A		
ENS81	20	1	4 5
ENS82	30		4 5 6 6.35 8

ENS81—A20—R1—d5



优惠价	
数量	价格
1~9	100%
10~	另行报价



交货期
7