


防水型 圆形连接器

直通母插头
WF系列 威浦品牌

WIEPU 威浦电器

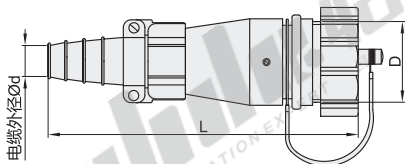


插座与面板 配合直径	16	20	24	28
D	M18×1	M22×1	M26×1	M30×1
L	73.5	90	93.5	104
Ød	7~8	8~10.5	8~10.5	11.5~13.6


单位: mm

□ 孔位排列图(从针的方向看)


WF16系列





WF20系列



WF24系列



WF28系列



视角标准: 第一视角

代码	插座与面板 配合直径	芯数	接插件种类	接线方式	出线方式	适配插针类型	
						中继公插头	弯角公插头
WF16K2ZIB	16	2	插孔	焊接	电缆护套	WF16J2TI	WF16J2TV
WF16K3ZIB		3				WF16J3TI	WF16J3TV
WF16K4ZIB		4				WF16J4TI	WF16J4TV
WF16K5ZIB		5				WF16J5TI	WF16J5TV
WF16K7ZIB		7				WF16J7TI	WF16J7TV
WF16K9ZIB		9				WF16J9TI	WF16J9TV
WF16K10ZIB		10				WF16J10TI	WF16J10TV
WF20K2ZIB	20	2				WF20J2TI	WF20J2TV
WF20K3ZIB		3				WF20J3TI	WF20J3TV
WF20K4ZIB		4				WF20J4TI	WF20J4TV
WF20K5ZIB		5				WF20J5TI	WF20J5TV
WF20K7ZIB		7				WF20J7TI	WF20J7TV
WF20K9ZIB		9				WF20J9TI	WF20J9TV
WF20K12ZIB		12				WF20J12TI	WF20J12TV
WF24K2ZIB	24	2				WF24J2TI	WF24J2TV
WF24K3ZIB		3				WF24J3TI	WF24J3TV
WF24K4ZIB		4				WF24J4TI	WF24J4TV
WF24K9ZIB		9				WF24J9TI	WF24J9TV
WF24K10ZIB		10				WF24J10TI	WF24J10TV
WF24K12ZIB		12				WF24J12TI	WF24J12TV
WF24K19ZIB		19				WF24J19TI	WF24J19TV
WF28K3ZIB	28	3				WF28J3TI	WF28J3TV
WF28K4ZIB		4				WF28J4TI	WF28J4TV
WF28K7ZIB		7				WF28J7TI	WF28J7TV
WF28K8ZIB		8				WF28J8TI	WF28J8TV
WF28K10ZIB		10				WF28J10TI	WF28J10TV
WF28K12ZIB		12				WF28J12TI	WF28J12TV
WF28K16ZIB		16				WF28J16TI	WF28J16TV
WF28K20ZIB		20				WF28J20TI	WF28J20TV
WF28K24ZIB		24				WF28J24TI	WF28J24TV
WF28K26ZIB		26				WF28J26TI	WF28J26TV

① 适配插针: 中继公插头详见P567, 弯角公插头P568。

② 插座与面板配合直径为16的连接器无防尘盖。

□ 电气技术特性

WF16系列

芯数	2	3	4	5	7	9	10
额定电流(A)	10			5			
接触件直径	Ø1.5×2	Ø1.5×3	Ø1×4	Ø1×5	Ø1×7	Ø1×9	Ø1×10
工作电压(V)	500				400		
耐压(V)	1500				1200		
接触电阻(mΩ)	2.5			5			
线规(mm²/AWG)	≤2/14			≤0.75/18			

WF20系列

芯数	2	3	4	5	7	9	12
额定电流(A)	25		10		5		
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1.5×5	Ø1×7	Ø1×9	Ø1×12
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	1		2.5		5		
线规(mm²/AWG)	≤4/11		≤2/14		≤0.75/18		

WF24系列

芯数	2	3	4	9	10	12	19
额定电流(A)	25		5.25		10		5
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1×5	Ø2.5×4	Ø1.5×10	Ø1.5×12
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	1		5.1		2.5		5
线规(mm²/AWG)	≤4/11		≤0.75/18, 54/11		≤2/14		≤0.75/18

WF28系列

芯数	3	4	7	8	10	12	16	20	24	26
额定电流(A)	50		25		10		5			
接触件直径	Ø3.5×3	Ø2.5×4	Ø2.5×7	Ø2.5×8	Ø2.5×10	Ø1.5×12	Ø1.5×16	Ø1×20	Ø1×24	Ø1×26
工作电压(V)	500							400		
耐压(V)	1500							1200		
接触电阻(mΩ)	0.5		1		2.5		5			
线规(mm²/AWG)	≤10/7		≤4/11		≤2/14		≤0.75/18			

□ 技术参数

接插方式	螺纹连接
接线方式	焊接: Ø1, Ø2.5, Ø3.5, Ø5.5
接插次数	500
温度范围	-40℃~+85℃
绝缘电阻	2000MΩ



请按图订钉

代码
WF16K2IB
WF16K3IB
WF16K2IB