

温度传感器

L型/防射插头 K型热电偶

□ L型

代码	类型	形状
ZKP09	K型热电偶	L型

□ 特点：可在狭窄的部位使用。


① 请避免用于运动设备，不可走拖链，如需选用耐折弯型。

② 本产品为K型热电偶，根据电势差测量被测物体的温度。

③ 导线耐温范围为0~200℃，若超过此温度，连接线的玻璃纤维可能出现损坏。

④ 本产品内部线体非铜线，请勿自行延长线体，会导致测温不准。

⑤ 适配温控器代码：ZKP25/26/27/28/30。

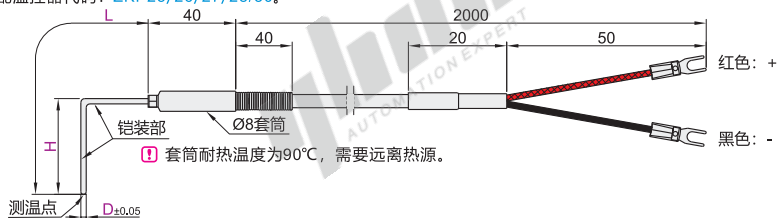

① 套筒耐热温度为90℃，需要远离热源。



型号	代码	D	L	H	探头耐温范围	线缆(金属网线)	电阻类型	等级	温度接点	铝装部材质
ZKP09	1.6	200	20	100	0~650℃	2M	K电阻	1级	非接地型	INC0600 (镍基合金)
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
	2.3	300	20	100	0~700℃	2M	K电阻	1级	非接地型	SUS310
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
	3.2	300	20	100	0~750℃	2M	K电阻	1级	非接地型	SUS310
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						
			20	100						
			30	120						
			40	140						
			50	160						
			70	180						

□ 防射插头

代码	类型	销售方式	材质
ZKP17	K型热电偶 插头+插口	套	PA66(尼龙)


□ 特点：将补偿导线分别连接连接器的插头和插口，补偿导线的拆装更简便。

① 插头与插口配套使用，配套发货。


② 适配温控器代码：ZKP25/26/27/28/30。




H: 8
插头




插口



H: 12.7
插头



插口



型号	代码	H	耐温范围
ZKP17	8	12.7	0~200℃



□ L型

型号	代码	D	L	H
ZKP09	1.6	200	20	100
ZKP09	2.3	300	20	100
ZKP09	3.2	300	20	100

□ 防射插头

型号	代码	H
ZKP17	8	12.7

ZKP09—D1.6—L100—H20

ZKP17—H8