


# 接线盒

## AG螺栓型

代码	类型	材质	防水防尘等级
ZKN60	AG螺栓型	塑料	IP66

特点:

- 有良好的绝缘性能, 抗化学腐蚀和抗机械挤压的性能;
- 达到高要求的IP66防护等级, 可以防尘、防水、抗80°C高温;
- 采用ABS, PC等材料制成, 外形美观, 性能坚固;
- 适用于小型终端机, 按钮盒, 信号机, 继电器, 计量器, 通信用接线盒等设备。

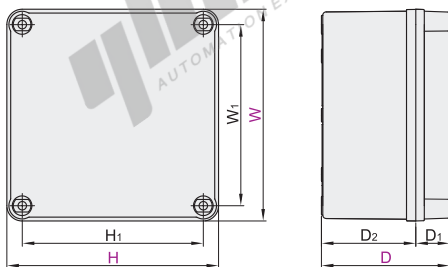

视角标准: 第一视角

代码	型号		W	D	上盖颜色	内板	H <sub>1</sub>	W <sub>1</sub>	D <sub>1</sub>	D <sub>2</sub>	内板尺寸 长×宽
	H										
ZKN60	65	50	55	G(灰色)	N(无内板)	52	37	20	35	—	
	95	65	75	G(灰色) W(透明)	N(无内板)	77	47	15	40	—	
	100	100	45			82	82	55	86×86		
	110	80	70	G(灰色) W(透明)	N(无内板)	92	62	25	50	96×66	
			85			65	—				
			75			55	—				
	125	125	100	G(灰色) W(透明)	N(无内板)	107	107	20	80	110×110	
			70			50	—				
	130	80	85	G(灰色) W(透明)	N(无内板)	112	62	—	65	119×69	
			120			100	—				
	150	150	120	G(灰色)	N(无内板)	132	132	—	100	122×122	
	160	80	55	G(灰色) W(透明)	N(无内板)	144	64	15	40	148×69	
	170	140	100			152	122	80	156×126		
	175	125	75	G(灰色) W(透明)	N(无内板)	157	107	—	55	155×105	
			100						80	—	
	180	80	70	G(灰色) W(透明)	N(无内板)	162	62	—	50	160×160	
			75						55	167×67	
	200	150	100	G(灰色) W(透明)	A(塑料内板)	182	132	20	80	185×135	
			130						110	—	
			95						75	183×183	
	250	80	85	G(灰色) W(透明)	N(无内板)	232	62	—	50	239×68	
			100						65	—	
			130						80	236×135	
	280	190	180	G(灰色) W(透明)	N(无内板)	255	132	30	80	260×162	
			130						100	—	
			180						30	236×236	
	300	300	120	G(灰色) W(透明)	N(无内板)	265	265	80	90	257×257	
			130						30	—	
	340	280	180	G(灰色) W(透明)	N(无内板)	315	255	30	80	300×240	
			130						80	—	
180			80						—		
380	190	130	G(灰色) W(透明)	N(无内板)	355	165	30	100	355×160		
		180						80	—		
		130						30	348×248		
		180	G(灰色)	N(无内板)				80			



型号		W	D	上盖颜色	内板
代码	H				
ZKN60	65	50	55	G(灰色)	N(无内板)
	95	65	75	G(灰色)	N(无内板)

ZKN60 — H65 — W50 — D55 — G — N