




带调速刻度·弯接头/直管接头型


精密型 调节阀

弯接头


代码	类型	材质			表面处理
		主体	螺纹部	脱离环部	
J-XZC11	带调速刻度 弯接头	PBT	黄铜	POM	镀铬

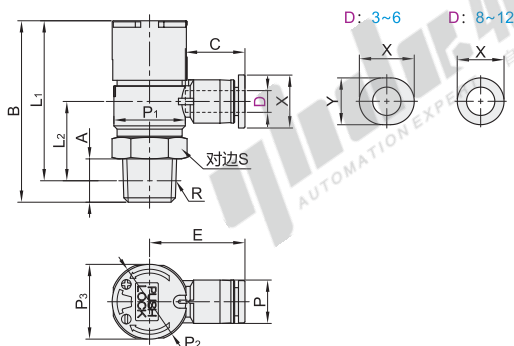

A(排气节流型)



B(进气节流型)





视角标准：第一视角



型号 代码	D	公称 型号	进气 方向	R	A	B		L1		L2	P	P1	P2	P3	C	E	S	X	Y	重量 (g)
						打开	锁住	打开	锁住											
J-XZC11	3	M3		M3	2.5	27.6	26.7	25.1	24.2	12.5	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	6.5
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	6.6
		M3		M3	2.5	27.6	26.7	25.1	24.2	12.5	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	6.7
	4	M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	6.6
		M3		M3	2.5	27.6	26.7	25.1	24.2	12.5	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	6.7
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	6.7
	1	M3		R1/8	8	33.5	32.5	29.5	28.5	14.6	10.5	13.2	14.4	13.8	11.6	17.6	12			14
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	7
		M3		R1/8	8	33.5	32.5	29.5	28.5	14.6	10.5	13.2	14.4	13.8	11.6	17.6	12			14
	6	M3		R1/4	11	39.8	38.8	33.8	32.8	17.5	14.5	16.8	14.4	13.8	18.1	30.2	17	13.8	—	28
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	7
		M3		R1/4	11	39.8	38.8	33.8	32.8	17.5	14.5	16.8	14.4	13.8	18.1	30.2	17	13.8	—	28
	8	M3		R3/8	12	48.8	47.6	42.5	41.3	25.2	21	21	19.6	—	23.4	37.2	19	19.8	—	58
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	7
		M3		R3/8	12	48.8	47.6	42.5	41.3	25.2	21	21	19.6	—	23.4	37.2	19	19.8	—	58
	10	M3		R1/2	15	54	52.8	45.8	44.6	26.9	17.5	26	19.6	—	23.4	39.5	24			85
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	7
		M3		R1/2	15	54	52.8	45.8	44.6	26.9	17.5	26	19.6	—	23.4	39.5	24			85
	12	M3		R3/8	12	48.8	47.6	42.5	41.3	25.2	21	21	19.6	—	23.4	37.2	19	19.8	—	58
		M5		M5	3	27.6	26.7	24.6	23.7	12	8	9.7	10.4	9.8	11	17.3	8	9.8	7.8	7
		M3		R3/8	12	48.8	47.6	42.5	41.3	25.2	21	21	19.6	—	23.4	37.2	19	19.8	—	58

直管接头型

代码	类型	材质	
		主体	脱离环部
J-XZC12	带调速刻度 直管接头型	PBT	POM

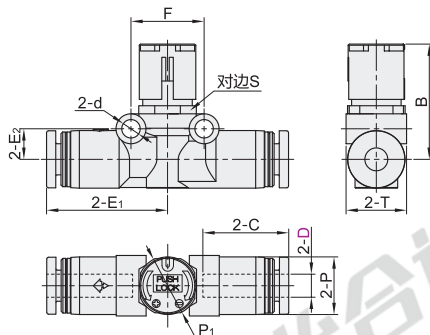

视角标准：第一视角



型号 代码	D	B		P	P1	C	E1	E2	S	d	F	T	重量(g)
		打开	锁住										
J-XZC12	4	20	19.1	10	10.4	14.9	21	5.3	10	3.2	12.7	10.5	8
	6	27	26	12.5	14.4	17	24.4	6.2	14	3.2	14.8	14.5	14
	8	28.5	27.5	14.8	14.4	18.1	28	8.4	14	3.2	18.2	15.4	20
	10	32	30.8	18.2	19.6	20.2	31.8	10.3	19	4.2	22.2	19.7	37
	12	35.2	34	21.2	19.6	23.4	36.9	12.2	21	4.2	25.7	22.7	54

弯接头

型号	公称型号	进气方向
J-XZC11	M3	A(排气节流)
J-XZC11	M5	B(进气节流)

J-XZC11—D3—M5—B

直管接头型

型号	公称型号
J-XZC12	M3
J-XZC12	M5

J-XZC12—D4



请按图示订货



未税价(元)

优惠价	
数量	1~10 11~
价格	100% 另行报价



交货期 12

气
调
速
接
头
类