

无油线性滑板

尺寸选择型 · 沉孔型


高力黄铜/高强度黄铜 线性滑板厚度10

高力黄铜

代码	类型	线性滑板厚度	材质
OBJ11	尺寸选择型 沉孔型	10	高力黄铜(SP2) 镶嵌固体润滑剂



RoHS10

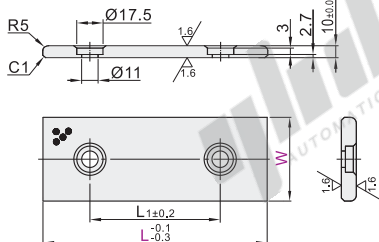


① W=28、38时仅纵向R为R2

② 滑动方向 →

③ W=28、38时仅纵向 (L方向)

④ 适用螺钉: TAF01-M10-L20

⑤ 附带螺钉, 无需另行购买。



型号	代码	W	L	L1
OBJ11	28		75	45
			100	50
			125	75
			150	100
	38		75	45
			100	50
			125	75
			150	100
	48		75	45
			100	50
			125	75
			150	100
	58		75	45
			100	50
			125	75
			150	100

型号	代码	W	L	L1
OBJ11	75		75	25
			100	50
			125	75
			150	100
	100		100	50
			125	75
			150	100
	125		150	100
			200	150
			250	200
			300	250



OBJ11—W28—L75



未税价(元)



交货期

代码	型号	W	L
OBJ11	28	75	100

OBJ11—W28—L75

数量	1~9	10~
价格	100%	另行报价



交货期




高强度黄铜

代码	类型	线性滑板厚度	材质
OBJ12	尺寸选择型 沉孔型	10	高强度黄铜 镶嵌固体润滑剂



W=50~70

W=80~120



型号	代码	W	L	安装孔
OBJ12	50		30	2孔
			40	
			50	
			60	
	70		30	3孔
			40	
			50	
			60	
	80		30	3孔
			40	
			50	
			60	
	100		30	3孔
			40	
			50	
			60	
	120		30	3孔
			40	
			50	
			60	



OBJ12—W50—L30



未税价(元)



交货期

代码	型号	W	L
OBJ12	50	30	40

OBJ12—W50—L30

数量	1~9	10~
价格	100%	另行报价



交货期

无油衬套

E1