


锁紧螺母


缩紧锁紧型

代码	类型	材质		热处理	表面处理
		国标	相当		
BKC01	缩紧锁紧型	45	S45C	28~32HRC	发黑

特点：该产品通过螺母本身的弹性变形，使螺纹面紧密贴合于外螺纹，实现轴向强力紧固。其锁紧能力优异，适用于易松脱、高扭矩、工作条件恶劣的场合。

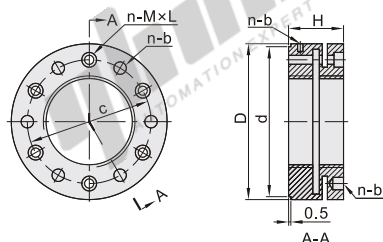

螺纹精度：ISO 4H
端面偏摆：0.005



视角标准：第一视角

型号	螺距	D	H	d	c	n-b	n-MxL	扭紧力矩 (NM)
代码	公称尺寸							
M10	0.75	32	16	29	23	3-4		3.5
M12		26	14	25	19	3-3	3-M4×10	2
M15	1.0	33		31	23.5			3
M17		37		34	26			
M18	1.5	38			28			
M20	1.0	40	18	36	30	4-4	4-M4×12	
M22		42		38	32			
M24	1.5	44			34			
M25		45		41	35			
M26								
M27								
M28		46	20	43	37		4-M4×14	
M30		48		45	39			
M32								
M33		50		47	41	4-5		3.5
M35								
M36		53		50	44			
M38	1.5							
M39		56	22	53	47		4-M4×16	
M40		58		55	49			
M42		60		57	51			
M45		68		63	57		6-M4×16	
M48		69		65	58			
M50		70		66	60			
M52	2.0	72	25	68	62		6-M4×18	
M55	1.5	75		71	65			
M56	2.0							
M58	1.5	82		77	70	6-6		
M60			26				6-M5×18	
M62	2.0	84		79	72			4.5
M64	1.5							
M64	2.0	86	28	82	75		6-M5×20	
M65	1.5	88		84	77			

型号	螺距	D	H	d	c	n-b	n-MxL	扭紧力矩 (NM)
代码	公称尺寸							
M65	2.0	88		84	77	6-6		
M68	1.5	93			80			
M70	2.0			89				
M72	1.5	95	28		82	6-7	6-M5×20	4.5
M75	2.0							
M75	1.5	97		91	84			
M80		100		94	87			
M85		110		103	95			
M85		115		108	100			
M90		120		113	105			
M95		125	32	118	110		6-M6×22	
M100	2.0	130		123	115			
M105		135		128	120	6-8		
M110		140		133	125			
M115		145	34	138	130			8
M120		155		146	136			
M125		160	36	150	140		6-M6×25	
M130	3.0	165		156	148			
M140	2.0	180		168	160			
M150	2.0	190	38	178	170		8-M6×25	
M160		205		193	182			
M170		215		204	193			
M180	3.0	230		216	205		8-M8×30	
M190		240		226	215	8-10		
M200		245	40	234	223			18
M210	4.0			253			8-M8×25	
M220	3.0	265		255	243		8-M8×30	
M230				253				
M235	3.0	275		265	251			
M240		285		270	257			
M250				275	261			
M250	4.0	295	42	285	271		8-M10×30	
M260	3.0	305		295	283	8-12		35
M280		325		315	303			
M300	4.0	345		335	323			



请按图示订货

型号	代码	公称尺寸	螺距	D
BKC01	M10	0.75	1	24

BKC01-M10-0.75



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7