


弯接头 >
T型接头 >
外螺纹

精密型 全不锈钢快插接头

弯接头

代码	类型	材质	
		主体	密封
Y-UDA03	外螺纹 弯接头	SUS316	氟化橡胶



视角标准：第一视角

型号		公称型号	R	A	B	F	C	E	S
代码	D								
Y-UDA03	4	M5	M5	3.5	18.5	23.5	18.6	22.3	12
		M6	M6	4.5	19.5	24.5			12
		1	R1/8	8	20	25			14
		2	R1/4	11	22.5	27.5			14
	6	M5	M5	3.5	19.5	25.5	18.7	23.4	12
		M6	M6	4.5	20.5	26.5			12
		1	R1/8	8	21	27			14
		2	R1/4	11	23.5	29.5			14
	8	3	R3/8	12	26.5	32.5	20	25.2	19
		4	R1/2	15	30.5	36.5			22
		1	R1/8	8	22	29			12
		2	R1/4	11	24.5	31.5			14
	10	3	R3/8	12	27.5	34.5	25.2	31.7	19
		4	R1/2	15	31.5	38.5			22
		1	R1/8	8	28	36.5			17
		2	R1/4	11	31	39.5			19
	12	4	R1/2	15	34	42.5	27.2	34.9	22
		2	R1/4	11	32.3	42			17
		3	R3/8	12	32.3	42			19
		4	R1/2	15	35.3	45			22




请按图示订货

型号		公称型号	R
代码	D		
Y-UDA03	6	2	R1/4
	8	1	R1/8

Y-UDA03 - D6 - 2

T型接头

代码	类型	材质	
		主体	密封
Y-UDA04	外螺纹 T型接头	SUS316	氟化橡胶

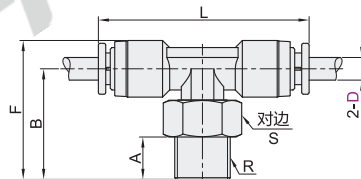

视角标准：第一视角

型号		公称型号	R	A	B	F	L	S
代码	D							
Y-UDA04	4	M5	M5	3.5	18.5	23.5	37.2	12
		M6	M6	4.5	19.5	24.5		12
		1	R1/8	8	20	25		14
		2	R1/4	11	22.5	27.5		14
	6	M5	M5	3.5	19.5	25.5	37.4	12
		M6	M6	4.5	20.5	26.5		12
		1	R1/8	8	21	27		14
		2	R1/4	11	23.5	29.5		14
	8	3	R3/8	12	26.5	32.5	39.7	19
		4	R1/2	15	30.5	36.5		22
		1	R1/8	8	22	29		12
		2	R1/4	11	24.5	31.5		14
	10	3	R3/8	12	27.5	34.5	40	19
		4	R1/2	15	31.5	38.5		22
		1	R1/8	8	28	36.5		17
		2	R1/4	11	31	39.5		19
	12	4	R1/2	15	34	42.5	50.4	22
		2	R1/4	11	32.3	42		17
		3	R3/8	12	32.3	42		19
		4	R1/2	15	35.3	45		22



请按图示订货

型号		公称型号	R
代码	D		
Y-UDA04	6	2	R1/4
	8	1	R1/8

Y-UDA04 - D6 - 2