


黄腊管

代码	类型	耐温	使用电压
ZIG91	聚氯乙烯纤维套管	105°C	2KV


特点:

- 产品是以中碱玻璃纤维编织而成，并涂以聚氯乙烯树脂塑化而成的电气绝缘漆管。

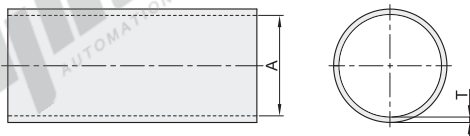

销售方式

卷



视角标准：第一视角

代码	型号	A 内径	A内径公差	T 壁厚	整卷包装 (米/卷)
ZIG91	1	1	±0.1	0.15	1000
	1.5	1.5			600
	2	2	±0.2	0.16	400
	2.5	2.5			
	3	3			
	3.5	3.5	±0.5	0.2	200
	4	4			
	5	5	0.22		
	6	6			
	7	7	±0.8	0.3	100
	8	8			
	9	9	0.32		
	10	10			
	12	12	0.4		
	14	14			
	16	16	±1.0	0.45	
	18	18			
	20	20	0.5		
	25	25			
	30	30	0.52		50
35	35				
40	40	±2.0	0.55		
50	50				
60	60				



请按图示订货

型号	
代码	规格
ZIG91	1
	1.5

ZIG91—1