

平皮带用滑轮


带肋槽直柱型

L=40~100


代码	类型		材质		表面处理
			国标	相当	
ENE11	带肋槽直柱型	无法兰型	LF2	A5052	本色阳极氧化



圆孔+螺孔型

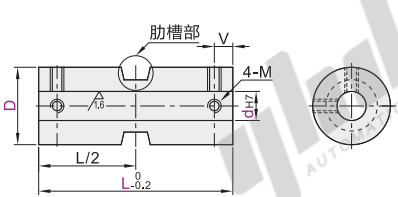


肋槽部



键槽尺寸 N: 新JIS(B1301)键槽尺寸表


NH7	bJS9	公差
8	3	1.4
10	3	1.4
K10	4	1.8
12	4	1.8
15	5	2.3
20	6	2.8
25	8	3.3
30	8	3.3

键槽孔+螺孔型

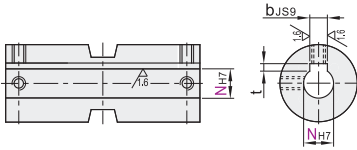

平皮带导条形状与滑轮肋槽避让尺寸参考图

平皮带导条形状 滑轮肋槽避让尺寸



其它规格尺寸请参考F4平皮带资料。

视角标准：第一视角

圆孔+螺孔型

型号	D	dH7	最小单位1	X	Y	Z	M	V
代码			L					
ENE11	30	8	40~100	10.0~16.0	5.0~15.0	6.0~8.0	M4	4
		10						
		12						
	35	10						
		12						
		15						
	40	12						
		15						
		20						
	50	15						
		20						
		25						
	60	20						
		25						
		30						
80	25							
	30							
	35							

键槽孔+螺孔型

型号	D	NH7	最小单位1	X	Y	Z	M	V
代码			L					
ENE11	30	8	10.0~16.0	5.0~15.0	6.0~8.0	M5	4.5	
		10 K10						
		12						
	35	10 K10						
		12						
		15						
	40	12						
		15						
		20						
	50	15						
		20						
		25						
	60	20						
		25						
		30						
80	25							
	30							
	35							

键槽孔+螺孔型

型号	D	NH7	最小单位1	X	Y	Z
代码			L			
ENE11	30	10	40~100	10.0~16.0	5.0~15.0	6.0~8.0

ENE11 - D30 - N8 - L80 - X10 - Y6 - Z5



数量	1~9	10~
价格	100%	另行报价



交货期
5

滑
惰
轮

F8

