


内六角带外螺纹型  
螺钉头部专用型

密封塞  
组合密封垫圈

密封塞

代码	类型	材质		硬度(邵氏)	使用温度范围
		主体	O型圈	橡胶	
XUC01	内六角带外螺纹型	SUS304	氟橡胶	A75	-10~200°C

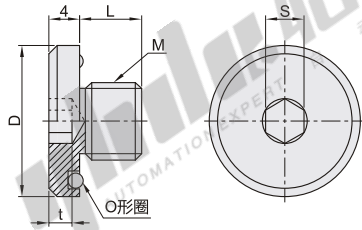

型号	M	L	D	S	t	O型圈	推荐紧固扭矩 (N·M)	重量 (g)	
XUC01	8	M8×1.0	7	16	5	3.5	XTC21-10	10.9	4
	10	M10×1.0	8	19.5	4	4	XTC21-12.5	13.7	7
	12	M12×1.5		21			XTC21-14	19.2	14
	14	M14×1.5	12	23	6	5	XTC21-16	27.4	19
	16	M16×1.5		25	8	6	XTC21-18	44.5	25



型号	
代码	规格
XUC01	10
	12

XUC01-10



优惠价	
数量	价格
1~100	101~
100%	另行报价


未税价(元)



交货期  
7

组合密封垫圈

代码	类型	材质		表面处理	硬度(邵氏)	使用温度范围
		金属	橡胶	金属	橡胶	
XUC11	螺钉头部专用型	低碳钢	丁腈橡胶	镀黄铜	HA70±5	-25~80°C

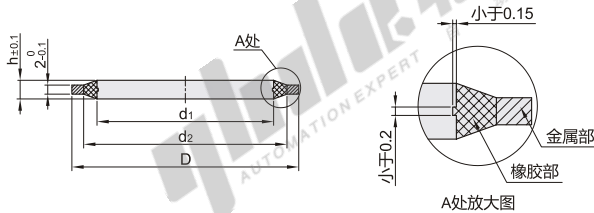

型号	公称直径	d1	d1公差	d2*	d2公差	D	D公差	h	孔d2允许偏心	适用螺纹尺寸
XUC11	8	8.4		10		14				M8
	10	10.4		12		16	<sup>0</sup> / <sub>-0.24</sub>			M10 (G1/8")
	12	12.4	±0.12	14	<sup>+0.24</sup> / <sub>0</sub>	18			0.1	M12
	14	14.4		16		20				M14 (G1/4")
	16	16.4		18		22				M16
	18	18.4		20		25	<sup>0</sup> / <sub>-0.28</sub>	2.7		M18 (G3/8")
	20	20.5		23		28				M20
	22	22.5		25	<sup>+0.28</sup> / <sub>0</sub>	30				M22 (G1/2")
	24	24.5	±0.14	27		32				M24
	27	27.5		30		35				M27 (G3/4")
	30	30.5		33		38	<sup>0</sup> / <sub>-0.34</sub>			M30
	33	33.5		36		42				M33 (G1")
	36	36.6		40	<sup>+0.34</sup> / <sub>0</sub>	46			0.15	M36
	39	39.6		43		50				M39
	42	42.6	±0.17	46		53				M42 (G1 1/4")
	45	45.6		49		56			2.9	M45
	48	48.7		52		60	<sup>0</sup> / <sub>-0.40</sub>			M48
	52	52.7		56	<sup>+0.40</sup> / <sub>0</sub>	66				M52
60	60.7	±0.20	64		75				M60 (G2")	

\*带\*尺寸仅为参考。



型号	
代码	公称直径
XUC11	10
	12

XUC11-10



优惠价	
数量	价格
1~100	101~
100%	另行报价

未税价(元)



交货期  
7