


代码	类型	材质			表面处理	
		外罩	螺杆	底座	外罩	螺杆
WAK21	金属+橡胶底座型	S45C		NBR	镀锌	
WAK22					镀锌	
WAK26		SUS304			电解研磨	



视角标准：第一视角

型号		M	L	螺距	S	H	T	V	V ₁	承载(Kg)	参考重量(Kg/pcs)		
代码	D												
WAK21 WAK22 WAK26	45	8	50	1.25	13	15	6	6	6.5	390	0.05		
			100								0.07		
		10	75	100	1.5	17		7	8	430	0.09		
												0.10	
	70	12	75	100	1.75	19	23	7	8	10	490	0.18	
												125	0.20
												150	0.21
			75	100								0.23	
													0.30
													0.33
		16	125	150	2	24		10	13	590		0.37	
													0.40
80		200	100			25	8				0.44		
												0.15	
	20	125	150	2.5	30			13	16	680	0.17		
												0.19	
											200	0.22	

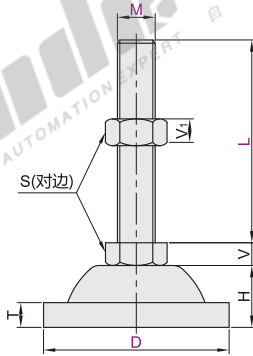

请按图示订货

型号		M	L
代码	D		
WAK21	70	12	75
WAK26	70	12	100

WAK21—D70—M12—L75

可选加工

型号		M	L	可选加工代码
代码	D			
WAK21	70	12	75	WS WL BSC
WAK26	70	12	100	

WAK21—D70—M12—L75—WS



未税价(元)

优惠价	
数量	价格
1~9	100%
10~	另行报价

交货期	
数量	价格
1~9	100%
10~	另行报价

1

防滑脚杯

可选加工参数



代码	技术说明																																
WS	螺杆末端加工外四角	选型方法 WS																															
		<table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>6</td><td></td></tr> <tr><td>12</td><td>8</td><td>10</td></tr> <tr><td>14</td><td></td><td></td></tr> <tr><td>16</td><td>10</td><td>12</td></tr> <tr><td>20</td><td>12</td><td>13.5</td></tr> <tr><td>24</td><td>14</td><td>15</td></tr> <tr><td>30</td><td>18</td><td>22</td></tr> </tbody> </table>	M	n	e	10	6		12	8	10	14			16	10	12	20	12	13.5	24	14	15	30	18	22							
M	n	e																															
10	6																																
12	8	10																															
14																																	
16	10	12																															
20	12	13.5																															
24	14	15																															
30	18	22																															
WL	螺杆末端加工外六角	选型方法 WL																															
		<table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>6</td><td></td></tr> <tr><td>12</td><td>8</td><td>10</td></tr> <tr><td>14</td><td>9</td><td></td></tr> <tr><td>16</td><td>10</td><td></td></tr> <tr><td>20</td><td>13</td><td>14</td></tr> <tr><td>24</td><td>16</td><td>18</td></tr> <tr><td>30</td><td>20</td><td>21</td></tr> </tbody> </table>	M	n	e	10	6		12	8	10	14	9		16	10		20	13	14	24	16	18	30	20	21							
M	n	e																															
10	6																																
12	8	10																															
14	9																																
16	10																																
20	13	14																															
24	16	18																															
30	20	21																															
BSC	螺杆末端加工扳手槽	选型方法 BSC																															
		<table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e1</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>8</td><td>8</td><td></td></tr> <tr><td>12</td><td>10</td><td></td><td></td></tr> <tr><td>14</td><td>12</td><td></td><td>12</td></tr> <tr><td>16</td><td>13</td><td>10</td><td></td></tr> <tr><td>20</td><td>17</td><td></td><td></td></tr> <tr><td>24</td><td>20</td><td></td><td>18</td></tr> <tr><td>30</td><td>26</td><td>15</td><td></td></tr> </tbody> </table>	M	n	e1	e	10	8	8		12	10			14	12		12	16	13	10		20	17			24	20		18	30	26	15
M	n	e1	e																														
10	8	8																															
12	10																																
14	12		12																														
16	13	10																															
20	17																																
24	20		18																														
30	26	15																															

代码	技术说明																								
NS	螺杆末端加工内四角	选型方法 NS																							
		<table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>5</td><td></td></tr> <tr><td>12</td><td>6</td><td>10</td></tr> <tr><td>14</td><td></td><td></td></tr> <tr><td>16</td><td>8</td><td>12</td></tr> <tr><td>20</td><td>10</td><td>13.5</td></tr> <tr><td>24</td><td>10</td><td>15</td></tr> <tr><td>30</td><td>18</td><td>20</td></tr> </tbody> </table>	M	n	e	10	5		12	6	10	14			16	8	12	20	10	13.5	24	10	15	30	18
M	n	e																							
10	5																								
12	6	10																							
14																									
16	8	12																							
20	10	13.5																							
24	10	15																							
30	18	20																							
NL	螺杆末端加工内六角	选型方法 NL																							
		<table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>4</td><td>5</td></tr> <tr><td>12</td><td>6</td><td>8</td></tr> <tr><td>14</td><td></td><td></td></tr> <tr><td>16</td><td>8</td><td>10</td></tr> <tr><td>20</td><td>10</td><td>12</td></tr> <tr><td>24</td><td>12</td><td>15</td></tr> <tr><td>30</td><td>16</td><td>18</td></tr> </tbody> </table>	M	n	e	10	4	5	12	6	8	14			16	8	10	20	10	12	24	12	15	30	16
M	n	e																							
10	4	5																							
12	6	8																							
14																									
16	8	10																							
20	10	12																							
24	12	15																							
30	16	18																							

- ① 请根据脚杯螺杆尺寸M进行加工参数的选择;
- ② 加工部不带镀层, 有防锈漆;
- ③ 工具可根据不同加工类型进行选择, 可选用开口扳手、活动扳手、内四角扳手、内六角扳手等。

