




代码	类型	材质			表面处理			使用气体
		气缸筒	活塞杆	吊耳	气缸筒	活塞杆	吊耳	
FHK30	高负载型	40Cr	38Cr	S45C	发黑	抛光+渗氮	发黑	N <sub>2</sub>

- ① 建议使用温度20~80°C，避免高温和腐蚀，更多使用工况请咨询我司。
- ② 不可承受任何拉力，为防止此类情况发生，使用的时候请设置一个限位装置。

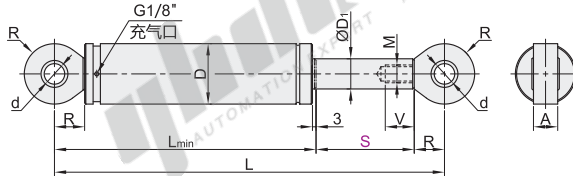

视角标准：第一视角

型号		行程	在150bar(+20°C)时 弹簧力(N)		L	压缩后 长度	D	D <sub>1</sub>	M	d	V	A	R	气体体积 (L)	重量 (kg)	
代码	规格	S	初始力	终端力	L <sub>min</sub>											
FHK30	750	12.7			170.4	132.7								0.03	1.8	
		25			195	145								0.04	1.95	
		38.1			221.2	158.1								0.06	2	
		50		12000	245	170									0.07	2.2
		63.5		272	183.5										0.09	2.25
		80		305	200										0.11	2.45
		100		345	220		50	25	M16×1.5	17	22	20	25		0.14	2.65
		125		395	245										0.17	2.9
		160		465	280										0.21	3.2
		200		545	320										0.26	3.6
	250		645	370										0.33	4.1	
	300		745	420										0.39	4.6	
	25		230	170										0.1	4.64	
	38.1		256.2	183.1										0.15	4.88	
	50		280	195										0.18	5.11	
	63.5		307	208.5										0.22	5.37	
	80		340	225										0.28	5.68	
	100	15000	380	245	23000	75	36	M24×2	25	32	25	35		0.34	6.06	
	125		430	270										0.42	6.54	
	160		500	305										0.53	7.25	
	200		580	345										0.68	8.01	
	250		680	395										0.81	8.96	
	300		780	445										0.96	9.91	
	25		42000	250	185									0.2	8.63	
	38.1		43000	276.2	198.1									0.26	9.14	
	50		44000	300	210									0.32	9.6	
	63.5		45000	327	223.5									0.38	10.13	
	80		46000	360	240									0.46	10.77	
	100	30000	400	260	30000	95	50	M30×2	30	40	30	40		0.56	11.55	
	125		47000	450	285									0.69	12.52	
160		520	320										0.87	13.87		
200		600	360										1.07	15.43		
250		700	410										1.32	17.37		
300		800	460										1.57	19.31		
25		71000	300	220									0.32	17.51		
38.1		75000	326.2	233.1									0.42	18.21		
50		77000	350	245									0.51	18.84		
63.5		80000	377	258.5									0.6	19.56		
80		81000	410	275									0.73	20.43		
100	50000	450	295	50000	120	65	M36×2	45	43	40	55		0.89	21.5		
125		500	320										1.09	22.83		
160		570	355										1.36	24.69		
200		650	395										1.68	26.81		
250		750	445										2.07	29.47		
300		850	495										2.46	32.13		



请按图示订货 FHK30—750—S12.7

型号	行程
代码 规格	S
FHK30 750	12.7
	25



未税价(元)

优惠价
数量 1~10 11~
价格 100% 另行报价



交货期 30