


星型

代码	类型	材质	硬度 (邵氏)	颜色	使用 温度范围	用途
XUE51	星型	丁腈橡胶	HA70±5	黑色	-20~100℃	耐矿物油

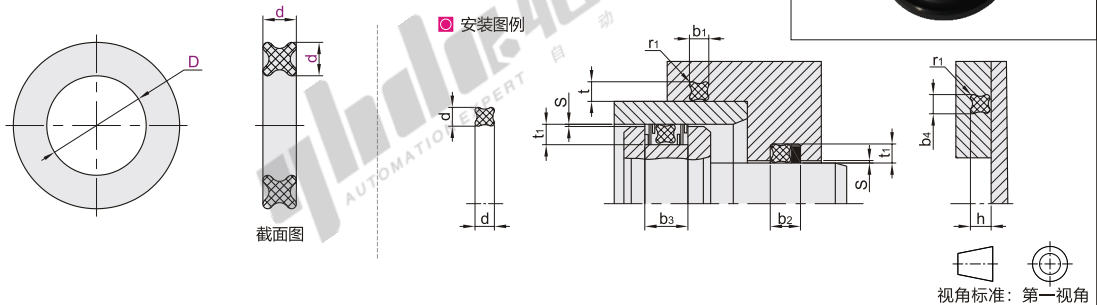

型号		d公差	D	D公差
代码	d			
XUE51	1.78	±0.07	14	±0.12
			15.6	
			17.17	
			18.77	±0.22
			20.35	
			21.95	
			23.52	
			25.12	
			28.3	±0.25
			34.65	
			37.82	±0.30
			44.17	±0.38
	2.62	±0.08	10.77	
			12.37	±0.12
			17.12	
18.72				
20.29			±0.22	
			21.89	
			23.47	
			25.07	±0.25

型号		d公差	D	D公差
代码	d			
XUE51	2.62	±0.08	26.64	±0.25
			29.82	
			31.42	±0.30
			36.17	
			50.47	±0.43
			10.69	
	3.53	±0.10	12.29	±0.12
			13.87	
			15.47	
			18.64	
			20.22	±0.22
			21.82	
			23.39	
			24.99	
			28.17	±0.25
			29.74	
			31.34	±0.30
			32.92	
34.52	±0.33			
40.87				

型号		d公差	D	D公差
代码	d			
XUE51	3.53	±0.10	47.22	±0.38
			50.39	±0.43
			10.46	
			12.07	±0.12
			13.64	
			16.81	
			19.99	
			21.59	±0.22
			23.16	
			24.77	
			26.34	
			27.94	±0.25
	5.33	±0.15	29.51	
			31.12	±0.30
			32.69	
			40.64	±0.33
			43.82	
			46.99	±0.38
			50.17	±0.43

安装尺寸

d 截面尺寸	径向初始压缩				沟槽尺寸					半径r ₁	径向间隙 S(max)
	动密封		静密封		沟槽深度		沟槽宽度				
	max	min	max	min	动密封 t ₁ +0.05	静密封 t/h+0.05	b ₁ 、b ₄ +0.2	b ₂ +0.2	b ₃ +0.2		
1.78	0.36	0.175	0.46	0.275	1.5	1.4	2	3.4	4.8	0.22	0.05
2.62	0.4	0.215	0.45	0.265	2.3	2.25	3	4.4	5.8	0.3	
3.53	0.43	0.205	0.53	0.305	3.2	3.1	4	5.4	6.8	0.4	0.08
5.33	0.56	0.25	0.71	0.4	4.9	4.75	6	7.7	9.4	0.4	0.10



请按图示订货

型号	d公差	D
XUE51	±0.07	14

XUE51—d1.78—D14



未税价(元)


优惠价
数量 1~50 51~
价格 100% 另行报价



交货期
9

自润滑型

代码	类型	材质		使用 温度范围	使用 压力范围	线速度	介 质
		油封	金属部				
XUE05	自润滑型	聚四氟乙烯 (PTFE)	SUS304	-50~200℃	0.03MPa	30m/s	润滑油、水、药液、 高温蒸气



型号	d公差	D	C
代码	d		
XUE05	10	25	7
	12		
	15	30	
	20	40	
	25	45	
	30	50	11
	35	55	
	40	62	
	50	72	12
			±0.5



请按图示订货

型号	d公差
XUE05	±0.12

XUE05—d12



未税价(元)

优惠价
数量 1~9 10~
价格 100% 另行报价



交货期
15