


防水型 圆形连接器

◀ 电缆对接插座 SA系列 威浦品牌

系列	类型	接插方式	材质			防护等级
			外壳	绝缘体	接触件	
SA系列	电缆对接插座	推入式快速锁紧	铝 (阳极氧化)	热塑塑料PPS	铜(镀金)	IP67 (连接后)

WEIPU® 威浦电器

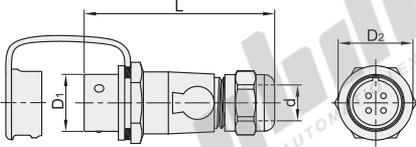

尺寸表

系列	D1	L	D2	电缆直径d
SA6	7.8	30.5	10.2	Ø3~4
SA8	9.4	32	12.8	Ø4~5
SA10	11	46	14.8	Ø4~6.5
SA12	13.8		18	
SA16	18.3	56	22.8	Ø5~8
SA20	21.6	64	26.8	Ø8~12
SA24	25.3	68	30	Ø10~14
SA28	29.8	73	34.6	Ø13~16

视图标准：第一视角

插针

型号	颜色	配合直径	芯数	适配插头	
				电缆插头	
SA611P2	B(黑色) S(银色)	6	2	SA610S2	
SA611P3			3	SA610S3	
SA611P4			4	SA610S4	
SA611P5			5	SA610S5	
SA811P2			8	2	SA810S2
SA811P3				3	SA810S3
SA811P4				4	SA810S4
SA811P6				6	SA810S6
SA811P8		8		SA810S8	
SA1011P2		10		2	SA1010S2
SA1011P3				3	SA1010S3
SA1011P4				4	SA1010S4
SA1011P5			5	SA1010S5	
SA1211P2			12	2	SA1210S2
SA1211P3				3	SA1210S3
SA1211P4				4	SA1210S4
SA1211P5				5	SA1210S5
SA1211P6		6		SA1210S6	
SA1211P7		7		SA1210S7	
SA1211P9		9		SA1210S9	
SA1611P2		16		2	SA1610S2
SA1611P3			3	SA1610S3	
SA1611P4			4	SA1610S4	
SA1611P5			5	SA1610S5	
SA1611P7			7	SA1610S7	
SA1611P9			9	SA1610S9	
SA1611P10			10	SA1610S10	
SA2011P2			20	2	SA2010S2
SA2011P3		3		SA2010S3	
SA2011P4		4		SA2010S4	
SA2011P5		5		SA2010S5	
SA2011P6		6		SA2010S6	
SA2011P7	7	SA2010S7			
SA2011P8	8	SA2010S8			
SA2011P9	9	SA2010S9			
SA2011P12	24	12	SA2010S12		
SA2011P15		15	SA2010S15		
SA2411P2		24	2	SA2410S2	
SA2411P3			3	SA2410S3	
SA2411P4			4	SA2410S4	
SA2411P9			9	SA2410S9	
SA2411P10			10	SA2410S10	
SA2411P12			12	SA2410S12	
SA2411P19	19		SA2410S19		
SA2811P2	28		2	SA2810S2	
SA2811P3		3	SA2810S3		
SA2811P4		4	SA2810S4		
SA2811P7		7	SA2810S7		
SA2811P8		8	SA2810S8		
SA2811P9		9	SA2810S9		
SA2811P10		10	SA2810S10		
SA2811P12		12	SA2810S12		
SA2811P16	28	16	SA2810S16		
SA2811P17		17	SA2810S17		
SA2811P20		20	SA2810S20		
SA2811P24		24	SA2810S24		
SA2811P26		26	SA2810S26		
SA2811P35		35	SA2810S35		

插孔

型号	颜色	配合直径	芯数	适配插头	
				电缆插头	
SA611S2	B(黑色) S(银色)	6	2	SA610P2	
SA611S3			3	SA610P3	
SA611S4			4	SA610P4	
SA611S5			5	SA610P5	
SA811S2			8	2	SA810P2
SA811S3				3	SA810P3
SA811S4				4	SA810P4
SA811S6				6	SA810P6
SA811S8		8		SA810P8	
SA1011S2		10		2	SA1010P2
SA1011S3				3	SA1010P3
SA1011S4				4	SA1010P4
SA1011S5			5	SA1010P5	
SA1211S2			12	2	SA1210P2
SA1211S3				3	SA1210P3
SA1211S4				4	SA1210P4
SA1211S5				5	SA1210P5
SA1211S6		6		SA1210P6	
SA1211S7		7		SA1210P7	
SA1211S9		9		SA1210P9	
SA1611S2		16		2	SA1610P2
SA1611S3			3	SA1610P3	
SA1611S4			4	SA1610P4	
SA1611S5			5	SA1610P5	
SA1611S7			7	SA1610P7	
SA1611S9			9	SA1610P9	
SA1611S10			10	SA1610P10	
SA2011S2			20	2	SA2010P2
SA2011S3		3		SA2010P3	
SA2011S4		4		SA2010P4	
SA2011S5		5		SA2010P5	
SA2011S6		6		SA2010P6	
SA2011S7	7	SA2010P7			
SA2011S8	8	SA2010P8			
SA2011S9	9	SA2010P9			
SA2011S12	24	12	SA2010P12		
SA2011S15		15	SA2010P15		
SA2411S2		24	2	SA2410P2	
SA2411S3			3	SA2410P3	
SA2411S4			4	SA2410P4	
SA2411S9			9	SA2410P9	
SA2411S10			10	SA2410P10	
SA2411S12			12	SA2410P12	
SA2411S19	19		SA2410P19		
SA2811S2	28		2	SA2810P2	
SA2811S3		3	SA2810P3		
SA2811S4		4	SA2810P4		
SA2811S7		7	SA2810P7		
SA2811S8		8	SA2810P8		
SA2811S9		9	SA2810P9		
SA2811S10		10	SA2810P10		
SA2811S12		12	SA2810P12		
SA2811S16	28	16	SA2810P16		
SA2811S17		17	SA2810P17		
SA2811S20		20	SA2810P20		
SA2811S24		24	SA2810P24		
SA2811S26		26	SA2810P26		
SA2811S35		35	SA2810P35		

技术参数

接插方式	推入式快速锁紧
接线方式	焊接
接插次数	500次
温度范围	-40℃~+85℃



请按图示订货

型号	颜色
SA611P2	B(黑色)
SA611P4	S(银色)

SA611P2 - B