


# 欧标40槽宽8.2系列型材(实用型)

◀ 边长40/80mm



代码	材质	表面处理
AOB05	A6063-T5	喷砂氧化

- ① 切断面未进行氧化处理。
- ② 最大使用长度：5880-6000mm。
- ③ 可定制表面处理。


☐ L长度公差




☐ 槽口详图

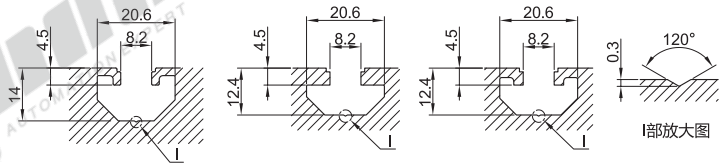


AOB05-J4040E




AOB05-J4040C




AOB05-J4040GE




AOB05-J4040J




AOB05-J4040A




AOB05-J4040B




AOB05-J4040T




AOB05-J4040H




AOB05-J4040R




AOB05-J4080E




AOB05-J4080C




AOB05-J4080GE




AOB05-J4080J



AOB05-J4080A



AOB05-J4080B




槽宽8.2系列  
欧标40


边长80mm ▶

# 欧标40槽宽8.2系列型材(实用型)


AOB05-J8840R

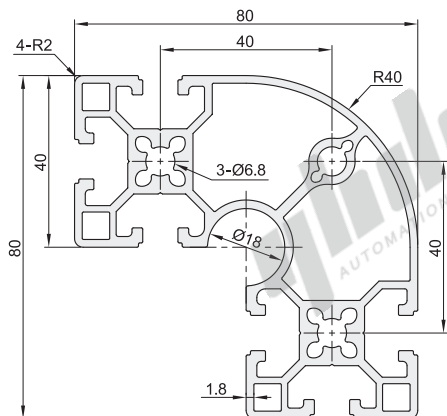



AOB05-J8840RA

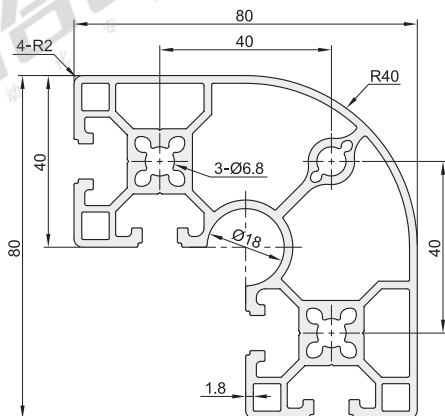

AOB05-J8080

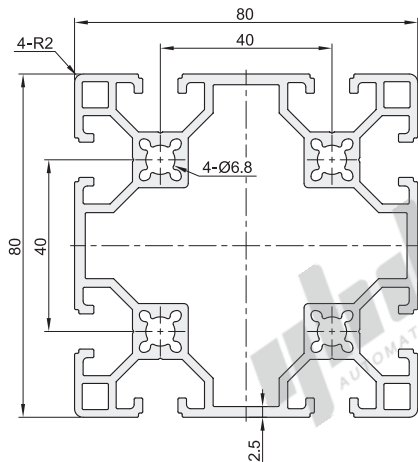

AOB05-J8080J

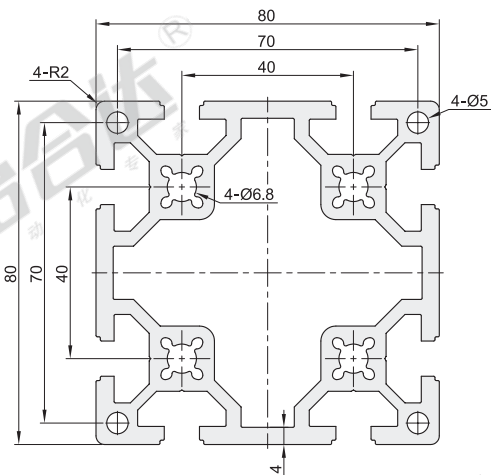

视角标准：第一视角

槽宽8.2系列  
欧标40

型号 代码	规格	L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm <sup>2</sup> )	截面惯性矩		抗弯截面模数	
						Ix	Iy	Wxmax (mm <sup>3</sup> )	Wymax (mm <sup>3</sup> )
AOB05	J4040R	50-6000	40×40	1.25	451.95	5.751×10 <sup>4</sup>	5.751×10 <sup>4</sup>	3301.38	3301.38
	J4040C			1.18	426.50	6.861×10 <sup>4</sup>	6.861×10 <sup>4</sup>	3430.50	3430.50
	J4040GE			1.36	493.92	7.82×10 <sup>4</sup>	7.82×10 <sup>4</sup>	3912.90	3912.90
	J4040E			1.50	544.45	8.534×10 <sup>4</sup>	8.534×10 <sup>4</sup>	4267.00	4267.00
	J4040J			1.94	704.55	11.758×10 <sup>4</sup>	11.758×10 <sup>4</sup>	5879.00	5879.00
	J4040A			1.44	523.75	8.010×10 <sup>4</sup>	8.284×10 <sup>4</sup>	4005.00	4142.00
	J4040B			1.42	515.74	8.021×10 <sup>4</sup>	8.042×10 <sup>4</sup>	4010.50	4021.00
	J4040H			1.39	505.32	7.578×10 <sup>4</sup>	8.126×10 <sup>4</sup>	3789.00	4063.00
	J4040T			1.42	513.91	7.891×10 <sup>4</sup>	8.165×10 <sup>4</sup>	3945.50	4082.50
	J4080E			2.70	981.29	16.834×10 <sup>4</sup>	63.014×10 <sup>4</sup>	4208.50	31507.00
	J4080C	2.04	742.91	12.973×10 <sup>4</sup>	47.865×10 <sup>4</sup>	3243.25	23932.50		
	J4080GE	2.30	837.11	14.05×10 <sup>4</sup>	52.87×10 <sup>4</sup>	2511.78	26435.40		
	J4080J	3.67	1333.57	23.165×10 <sup>4</sup>	81.866×10 <sup>4</sup>	5791.25	40933.00		
	J4080A	2.03	738.80	13.043×10 <sup>4</sup>	23.165×10 <sup>4</sup>	3260.75	11582.50		
	J4080B	2.03	736.74	12.992×10 <sup>4</sup>	47.599×10 <sup>4</sup>	3248.00	23799.50		
	J8840R	3.23	1174.21	68.46×10 <sup>4</sup>	68.46×10 <sup>4</sup>	16014.04	16014.04		
	J8840RA	3.22	1169.74	68.254×10 <sup>4</sup>	68.254×10 <sup>4</sup>	15962.11	15962.11		
	J8080	3.81	1383.29	102.196×10 <sup>4</sup>	102.196×10 <sup>4</sup>	25549.00	25549.00		
	J8080J	5.53	2010.02	145.328×10 <sup>4</sup>	145.328×10 <sup>4</sup>	36332.00	36332.00		



请按图示订货

型号		L
代码	规格	最小单位0.5
AOB05	J4040R J4040C	50-6000

AOB05 - J4040R - L50