


锁紧螺母

牙腹锁紧型 · 三/六槽 圆形

代码	类型	槽数	材质		热处理	表面处理
			国标	相当		
BKJ73	牙腹锁紧型	三/六槽	45	S45C	28-32 HRC	发黑

特点：该产品锁紧铜与螺纹呈30°角设计，不承受作用于螺纹上的轴向负荷。当螺母锁紧时，螺纹面不会解除轴向负荷，螺母不会变形。等间距锁紧铜可以用来调整即将装到轴上其他部件的偏差。由于锁紧铜不会变形，螺母经多次拆装仍可以保持精密度。

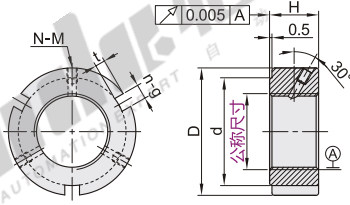

螺纹精度：ISO 4H
端面偏摆：0.005



型号	螺距	D	H	d	t	n-g	N-M	扭紧力矩 (NM)						
M12	1.5	30	14	25		3-4	3-M6	8						
M14	1.5													
M15	1.0													
M16	1.5													
M17	1.0													
M18	1.5													
M20	1.0	16	34	2	3-4	3-M5	4.5							
M22		38		33		3-5	3-M6	8						
M24														
M25														
M27	40													
M30	45								18	41				
M33	50													
M35		52		46										
M36	1.5													
M39														
M40									58	52	2.5	3-6		
M42									62	56				
M45									65	59				
M48		70		64										
M50														
M52														
M55	2.0								75	68	3	3-7	3-M8	18
M56	1.5													
M60	2.0													
M64	1.5													
M65														
M68														
M70	2.0	92	84											
M72		94	24	86	3.5	3-8								
M75														
M76														
M76														

型号	螺距	D	H	d	t	n-g	N-M	扭紧力矩 (NM)
M80		105	24	98	3.5	3-8		
M85		110	102					
M90		120	108	4	6-10			18
M95		125	117					
M100		130	118	4	6-10			
M105		140	125					
M110		145	132	2.0				
M115		150	137					
M120		155	142	3.0				
M125		160	147					
M130		165	152	5	6-12	3-M10	35	
M135		175	160					
M140		180	165	32				
M145		190	175					
M150		195	180	3.0				
M155		200	180					
M160		210	190	3.0				
M165		210	190					
M170		220	200	3.0				
M180		230	205					
M190		240	215	4.0				
M200		250	225					
M210		260	245	3.0				
M220		270	255					
M240		290	268	3.0				
M260		310	288					
M270		320	298	4.0			3-M14	100
M280		330	308					
M300		360	42	336	11	6-24		



请按图示订货

代码	公称尺寸	螺距	D
BKJ73	M12	1.5	30
	M14	1.5	

BKJ73—M12—1.5



未税价(元)

数量	1-9	10~
价格	100%	另行报价



交货期
5