


● L尺寸固定型

代码	类型	材质		表面处理	表面硬度
		国标	相当		
WHC81	加长杆内螺纹型 L尺寸固定型	45	S45C	镀硬铬	750HV~

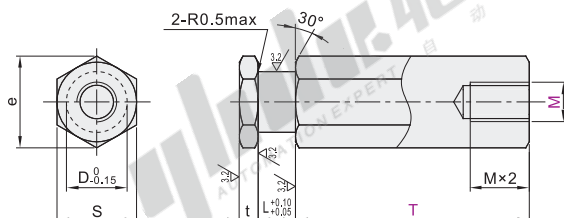


 视角标准：第一视角

型号			T	L	t	D	S	e
代码	M	螺距						
WHC81	3	0.5	10 12 15 18 20 25 30	4	3	4	6	6.9
	4	0.7	12 15 18 20 25 30 40			6	8	9.2
	5	0.8	15 18 20 25 30 40 50			7	10	11.5
	6	1.0	18 20 25 30 40 50 60	6		10	14	16.2
	8	1.0	20 25 30 40 50 60 70			13	17	19.6
		1.25	25 30 40 50 60 70 80			16	21	24.2
	10	1.25	25 30 40 50 60 70 80	8	4	18	23	26.6
		1.5	30 40 50 60 70 80 90			21	26	30
	12	1.25	30 40 50 60 70 80 90			12		
		1.5	40 50 60 70 80 90 100					
	14	1.5	40 50 60 70 80 90 100					
	18	1.5	60 70 80 90 100					



请按图示订货

型号			T
代码	M	螺距	
WHC81	3	0.5	10 12 15
	4	0.7	12 15

WHC81-M3-0.5-T12



未税价(元)

● 优惠价

数量	1~19	20~
价格	100%	另行报价




交货期

5

● L尺寸选择型

代码	类型	材质		表面处理	表面硬度
		国标	相当		
WHC91	加长杆内螺纹型 L尺寸选择型	45	S45C	镀硬铬	750HV~

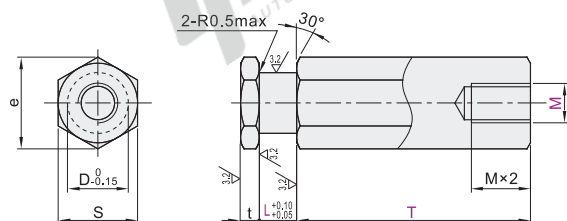

❗ $t+L+T \leq 3M$ 时, 螺纹孔变为通孔。



型号			L													T	t	D	S	e
代码	M	螺距														最小单位1				
WHC91	3	0.5	3 4 5 6 8													3~50	3	4	6	6.9
	4	0.7	3 4 5 6 8 9															6	8	9.2
	5	0.8	3 4 5 6 8 9 10													3~60				
	6	1.0	3 4 5 6 8 9 10 12													4~80		7	10	11.5
	8		3 4 5 6 8 9 10 12 13 15 16															10	14	16.2
	10	1.25	4 5 6 8 9 10 12 13 15 16 19													4~100	4			
		1.5	4 5 6 8 9 10 12 13 15 16 19 20																13	17
	12		1.25	4 5 6 8 9 10 12 13 15 16 19 20															16	21
	14	1.5	5 6 8 9 10 12 13 15 16 19 20													5~100				
	18		5 6 8 9 10 12 13 15 16 19 20														18	23	26.6	
			6 8 9 10 12 13 15 16 19 20													8~100		21	26	30
			22	10 12 13 15 16 19 20													10~100	5	25	30



请按图示订货

型号			L	T 最小单位1
代码	M	螺距		
WHC91	4	0.7	3 4 5	3~60
	5	0.8	3 4 5	

WHC91-M4-07-14-T10



未税价(元)

● 优惠价

数量	1~19	20~
价格	100%	另行报价



交货期

5