


# 线槽

## 双层分离式线槽/连齿式线槽 标准型


代码	类型		材质	颜色	阻燃等级	工作温度
ZIK26	标准型	双层分离式线槽	环保硬质PVC	灰色	UL94V-0	-40°C ~ +70°C
ZIK27		连齿式线槽				

特点:



- 采用环保硬质PVC制作, 环保无污染;
- 静态使用温度最低-40°C, 持续高温最高至70°C, 防水防潮;
- 反扣式线槽盖与槽体设计合理, 组合后绝不脱落, 且结合面平滑, 不易割伤手及磨损配线。




双层分离式线槽  
ZIK26




连齿式线槽  
ZIK27



W < 80mm 线槽底部孔尺寸

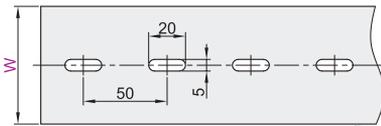

W ≥ 80mm 线槽底部孔尺寸

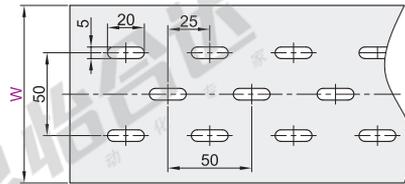

销售方式	每根长度
根	2米



双层分离式线槽

代码	型号	H	W	长度 (m)	A	B
ZIK26	60	40	40	2	4	6
		45				
		50				
		60				
		80				
		100				
	80	40				
		45				
		50				
		60				
		80				
		100				
100	40					
	50					
	60					
	80					

连齿式线槽

代码	型号	H	W	长度 (m)	A	B	
ZIK27	40	40	40	2			
		25					
		35					
	50	45					
		50					
		60	6				8
	60	40					
		60					
		33					
	65	45					
		30					
		40					
	80	45					
		50					
		60	8				10
		80					
		100					
		120					
100	40						
	50						
	60	10	12				
	80						
	100						

双层分离式线槽



型号		
代码	H	W
ZIK26	60	40
		45

ZIK26—H60—W40