


代码	类型	材质	最大压缩量
YSWM	中载荷型	油冷回火弹簧钢	L×32%
J-YSWM			

□ L尺寸公差

L	公差
50以下	±0.5
50以上	±1.0%

- ① 载荷(±10%)
- ① 直角度(2°以下)
- ① 载荷(N)=定数(N/mm)×压缩量
- ① 耐热温度为150°C
- ① 1kgf=9.81N
- ① 压紧长度为参考值,制作时会
有少许差异。
- ① 弹簧颜色和圈数可能会因生产
批次不同而异,但产品性能均
符合标准,不影响使用!

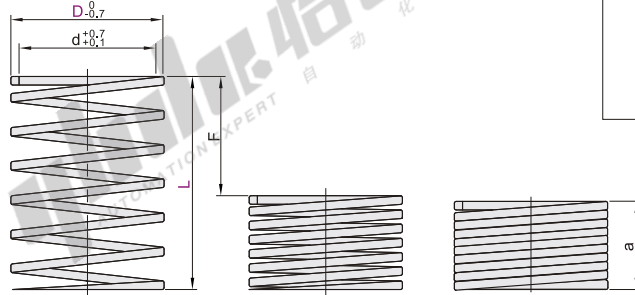

视角标准: 第一视角

代码	型号	D	L	内径 d	弹簧常数 N/mm	a	使用方法															
							30万次F=L×32% Fmm	50万次F=L×28.8% 负载N	100万次F=L×25.6% Fmm	负载N	30万次F=L×32% Fmm	50万次F=L×28.8% 负载N	100万次F=L×25.6% Fmm	负载N								
YSWM J-YSWM	6	15*	20*	3	20.3	9.9	4.7	4.2	3.7	99	10.2	8.9	9.1	80								
															15.4	13.2	6.5	5.7	5.0			
															12.2	16.5	8	7.1	6.3			
															10.1	19.5	9.5	8.5	7.8			
															8.9	22.8	11.3	10.2	9.1			
															7.6	26.1	12.8	11.6	10.3			
															6.7	29.5	14.5	13	11.6			
															6.2	32.6	16	14.5	12.9			
															5.7	36.1	17.5	15.8	14.1			
															5.2	39.2	19.3	17.4	15.5			
															42.57	6.3	3.2	2.9	2.6			
															28.38	9.4	4.8	4.3	3.8			
															21.28	12.5	6.4	5.8	5.1			
															17.03	15.7	8.0	7.2	6.4			
14.19	18.8	9.6	8.6	7.7																		
12.16	21.9	11.2	10.1	9.0																		
10.64	25.0	12.8	11.5	10.2																		
9.46	28.2	14.4	13.0	11.5																		
8.51	31.3	16.0	14.4	12.8																		
7.74	34.4	17.6	15.8	14.1																		
7.09	37.6	19.2	17.3	15.4																		
6.55	42.5	20.8	18.7	16.6																		
6.08	45.8	22.4	20.2	17.9																		
5.68	49.1	24.0	21.6	19.2																		
5.5	52.2	25.7	23.1	20.4																		
4.7	27.5	28.8	25.92	23.04																		
4.3	31.0	32.0	28.8	25.6																		
61.20	6.5	3.2	2.9	2.6																		
40.80	9.8	4.7	4.3	3.7																		
30.64	12.5	6.4	5.8	5.1																		
24.51	15.7	8.0	7.2	6.4																		
20.43	18.8	9.6	8.6	7.7																		
17.51	21.9	11.2	10.1	9.0																		
15.32	25.0	12.8	11.5	10.2																		
13.62	28.2	14.4	13.0	11.5																		
12.26	31.3	16.0	14.4	12.8																		
11.14	34.4	17.6	15.8	14.1																		
10.21	37.6	19.2	17.3	15.4																		
9.43	40.7	20.8	18.7	16.6																		
8.75	43.8	22.4	20.2	17.9																		
8.17	47.0	24.0	21.6	19.2																		
7.66	50.1	25.6	23.0	20.5																		
6.81	56.3	28.8	25.9	23.0																		
6.10	31.2	32.0	28.8	25.6																		
59.10	9.7	4.8	4.3	3.7																		
44.27	12.5	6.4	5.8	5.1																		
35.42	15.7	8.0	7.2	6.4																		
29.51	18.8	9.6	8.6	7.7																		
25.30	21.9	11.2	10.1	9.0																		
22.14	25.0	12.8	11.5	10.2																		
19.68	28.2	14.4	13.0	11.5																		
17.71	31.3	16.0	14.4	12.8																		
16.10	34.4	17.6	15.8	14.1																		
14.76	37.6	19.2	17.3	15.4																		
13.62	40.7	20.8	18.7	16.6																		
13.65	43.8	22.4	20.2	17.9																		
11.81	47.0	24.0	21.6	19.2																		
11.07	50.1	25.6	23.0	20.5																		
9.84	56.3	28.8	25.9	23.0																		
8.90	31.5	32.0	28.8	25.6																		
59.70	13.2	6.3	5.8	5.1																		
47.64	15.7	8.0	7.2	6.4																		
39.70	18.8	9.6	8.6	7.7																		
34.03	21.9	11.2	10.1	9.0																		
29.77	25.0	12.8	11.5	10.2																		
YSWM J-YSWM	14	45	50	7	26.47	28.2	14.4	13.0	11.5	383	20.2	345	17.9	306								
															23.82	31.3	16.0	14.4	12.8			
															21.65	34.4	17.6	15.8	14.1			
															19.85	37.6	19.2	17.3	15.4			
															18.32	40.7	20.8	18.7	16.6			
															17.01	43.8	22.4	20.2	17.9			
															15.88	47.0	24.0	21.6	19.2			
															14.89	50.1	25.6	23.0	20.5			
															13.23	56.3	28.8	25.9	23.0			
															11.91	62.6	32.0	28.8	25.6			
															9.60	39.4	40.0	36.0	32.0			
															78.20	13.1	6.4	5.8	5.2			
															62.64	15.7	8.0	7.2	6.4			
															52.20	18.8	9.6	8.6	7.7			
44.74	21.9	11.2	10.1	9.0																		
39.15	25.0	12.8	11.5	10.2																		
34.80	28.2	14.4	13.0	11.5																		
31.32	31.3	16.0	14.4	12.8																		
28.47	34.4	17.6	15.8	14.1																		
26.10	37.6	19.2	17.3	15.4																		
24.09	40.7	20.8	18.7	16.6																		
22.37	43.8	22.4	20.2	17.9																		
20.88	47.0	24.0	21.6	19.2																		
19.57	50.1	25.6	23.0	20.5																		
17.40	56.3	28.8	25.9	23.0																		
15.66	62.6	32.0	28.8	25.6																		
12.53	78.3	40.0	36.0	32.0																		
99.50	13.2	6.4	5.8	5.1																		
79.03	15.7	8.0	7.2	6.4																		
65.86	18.8	9.6	8.6	7.7																		
56.45	21.9	11.2	10.1	9.0																		
49.39	25.0	12.8	11.5	10.2																		
43.90	28.2	14.4	13.0	11.5																		
39.51	31.3	16.0	14.4	12.8																		
35.92	34.4	17.6	15.8	14.1																		
32.93	37.6	19.2	17.3	15.4																		
30.40	40.7	20.8	18.7	16.6																		
28.22	43.8	22.4	20.2	17.9																		
26.34	47.0	24.0	21.6	19.2																		
24.70	50.1	25.6	23.0	20.5																		
21.95	56.3	28.8	25.9	23.0																		
19.76	62.6	32.0	28.8	25.6																		
15.81	78.3	40.0	36.0	32.0																		
123.00	13.2	6.4	5.7	5.2																		
98.06	15.7	8.0	7.2	6.4																		
81.71	18.8	9.6	8.6	7.7																		
70.04	21.9	11.2	10.1	9.0																		
61.28	25.0	12.8	11.5	10.2																		
54.48	28.2	14.4	13.0	11.5																		
49.03	31.3	16.0	14.4	12.8																		
44.57	34.4	17.6	15.8	14.1																		
40.86	37.6	19.2	17.3	15.4																		
37.71	40.7	20.8	18.7	16.6																		
35.02	43.8	22.4	20.2	17.9																		
32.6	47.0	24.0	21.5	19.2																		
30.5	50.1	25.6	23.0	20.5																		
27.2	56.3	28.8	25.9	23.0																		
24.4	62.5	32.1	28.9	25.6																		
19.5	78.3	40.0	36.1	32.0																		
16.2	93.96	48.0	43.2	38.4																		
148.60	5.9	6.4	5.76	5.12																		
118.47	15.7	8.0	7.2	6.4																		
98.73	18.8	9.6	8.6	7.7																		
84.62	21.9	11.2	10.1	9.0																		
74.05	25.0	12.8	11.5	10.2																		

① 带*号仅适用标准型。

