


双面带防尘盖式 经济型


微型深沟球轴承

代码	类型	轴承类型 代码	轴承精度	后置代码	轴承材质	
BAF...-E	经济型	6	GB/T 307.1 0级	ZZ(双面带防尘盖)	国标	相当
BAF...-E-SUS					GCr15 2Cr13	SUJ2 SUS420

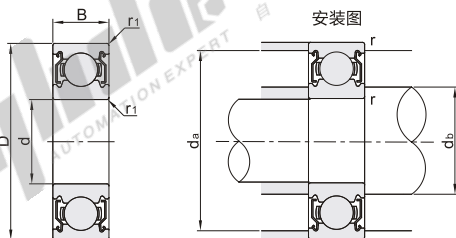

安装图

- ① 不承诺品牌。
- ② 经济型适合中低转速、低载荷。
- ③ 基本额定负载/容许转速/重量值不适用于SUS420材质。



视角标准：第一视角

型号		d	D	B	r1 (min)	基本额定负载(N)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		d ₀ (min)	d _a (max)	r(max)	
BAF...-E	682ZZ	2	5	2.3	0.08	80	51740000	2.8	4.2	0.08	0.13	
	692ZZ		6	3	0.15	150	89670000	3.2	4.8	0.15	0.31	
	602ZZ		7	3.5	0.15	150	12562000	3.1	5.8	0.15	0.54	
	682AZZ		6	2.6	0.08	80	73650000	3.2	4.8	0.08	0.22	
	692AZZ	2.5	7	3.5	0.15	150	96590000	3.7	5.8	0.15	0.43	
	673ZZ		6	2.5	0.08	80	94600000	3.6	5.4	0.08	0.2	
	683ZZ		7	3	0.1	100	13058000	3.9	5.8	0.1	0.33	
	693ZZ		8	4			18054000	6.8			0.61	
	603ZZ	3	9	5	0.15	150	21950000	4.2	7.8	0.15	0.92	
	623ZZ		10	4			22450000	8.8			1.6	
	633ZZ		13	5	0.2	1301	48840000	4.6	11.4	0.2	3.43	
	674ZZ		7	2.5	0.08	222	8860000	6.4	0.08	0.28	0.2	
	684ZZ	4	9				22449000	5	7.8	0.1	0.76	
	694ZZ		11	4	0.15	150	27645000	5.2	9.8	0.15	2	
	604ZZ		12		0.2	200	36043000	5.6	10.4	0.2	2.3	
	624ZZ		13	5			49042000	6	11.4		3.5	
	634ZZ	5	16		0.3	300	68037000	6	14	0.3	5.1	
	675ZZ		8	2.5	0.08	80	91490000	5.6	7.4	0.08	0.32	
	685ZZ		11	5	0.15	150	28243000	6.2	9.8	0.15	1.1	
	695ZZ		13	4	0.2	200	43040000	6.6	11.4	0.2	2.4	
	605ZZ	5	14				50539000	6	12.4		3.5	
	625ZZ		16	5			68037000	7	14		4.8	
	635ZZ		19	6	0.3	300	88534000	7	17	0.3	8	
	676ZZ		10	3	0.1	496	21845000	7.04	9.3	0.1	0.7	
	686ZZ	6	13	5	0.15	1080	44039000	7	11.8		1.9	
	696ZZ		15	0.2	1350	53037000	7.6	13.4	0.2	3.8		
	606ZZ		17			2190	86538000	15			6	
	626ZZ		19	6	0.3	2340	88534000	8	17	0.3	8.1	
	636ZZ	7	22	7			3333142330000	20			14.5	
	687ZZ		14	5	0.15	1170	50537000	8.2	12.8	0.2	2.1	
	697ZZ		17			1610	71535000	15			5.2	
	607ZZ		19	6	0.3	2240	91034000	9	17	0.3	8	
	627ZZ	8	22	7			3350140032000	20			13	
	678ZZ		12	3.5	0.1	543	27440000	8	11.33	0.1	0.99	
	688ZZ		16	5	0.2	1610	140035000	9.6	14.4	0.2	3.1	
	698ZZ		19	6			1990865330000	17			7.3	
	608ZZ	9	22	7	0.3	3350	140032000	20			12	
	628ZZ		24	8			4000159031000	10	22	0.3	17	
	638ZZ		28	9			4560198328000	26			30.3	
	689ZZ		17	5	0.2	1720	82033000	10.6	15.4	0.2	3.2	
	699ZZ	9	20	6			2480109032000	11	18		8.2	
	609ZZ		24	7	0.3	3400	145031000	22	0.3	14	20	
	629ZZ		26	8	0.6	4550	196030000	13				

① 1KgF=9.81N

型号		d	D	B	r1		基本额定负载(N)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号				Cr(动)	Cor(静)	d _{min}	d _a (max)		r _f (max)			
BAF...-E-SUS	682ZZ	2	5	2.3	0.08	143	40	850000	2.7	3.9	0.08	0.17	
	692ZZ		6	3	0.15	281	79	750000	3	4.8	0.15	0.38	
	602ZZ		7	3.5		328	102	600000	3.2	5.8		0.58	
	682AZZ		6	2.6	0.08	178	59	710000	3.7	4.9	0.08	0.29	
	692AZZ	2.5	7	3.5	0.15	328	102	630000	3.85	5.65	0.15	0.55	
	673ZZ		6	2.5	0.08	242	94	710000	3.6	5.4	0.08	0.2	
	683ZZ		7	3	0.1	390	130	630000	3.9	5.8	0.1	0.45	
	693ZZ		8	4	560	180	600000	6.8	0.61				
	603ZZ	3	9	5	0.15	571	189	560000	4.2	7.8	0.15	1.13	
	623ZZ		10	4	640	224	500000	8.8	1.6				
	633ZZ		13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43	
	674ZZ		7	2.5	0.08	222	88	600000	6.4	0.08	0.28		
	684ZZ	4	9		0.15	640	224	530000	5	7.8	0.1	1.01	
	694ZZ		11	4		715	276	480000	5.2	9.8	0.15	1.8	
	604ZZ		12		0.2	957	350	5.6	10.4	0.2	2.34		
	624ZZ		13	5	1310	490	400000	5.6	11.4		3.2		
	634ZZ	5	16	0.3	1340	523	360000	6	14	0.3	5.44		
	675ZZ		8	2.5	0.1	218	131	530000	5.8	7.4	0.1	0.34	
	685ZZ		11	5	0.15	715	282	450000	6.2	9.8		1.96	
	695ZZ		13	4	0.2	1080	430	430000	6.6	11.4	0.2	2.4	
	605ZZ	5	14		0.3	1330	505	400000	6	12.4		3.5	
	625ZZ		16	5		1760	680	360000	7	14	0.3	4.8	
	635ZZ		19	6	2336	896	320000	7	17	0.3	8.89		
	676ZZ		10	3	0.1	496	218	450000	7.04	9.3	0.1	0.7	
	686ZZ	6	13	5	0.16	1080	440	400000	7	11.8	0.2	2.69	
	696ZZ		15	0.2	1350	530	7.6	13.4	0.2	3.8			
	606ZZ		17		2190	865	380000	15	6				
	626ZZ		19	6	0.3	2340	885	320000	8	17	0.3	8.1	
	636ZZ	7	22	7		3333	1423	300000	20			14.5	
	687ZZ		14	5	0.15	1170	505	400000	8.2	12.8	0.15	2.97	
	697ZZ		17		1610	710	360000	15	5.12				
	607ZZ		19	6	0.3	2240	885	9	17	0.3	7.51		
	627ZZ	8	22	7		3300	1370	300000	20			12.9	
	678ZZ		12	3.5	0.1	543	274	400000	8	11.33	0.1	0.99	
	688ZZ		16	5	0.2	1610	715	360000	9.6	14.4	0.2	4.02	
	698ZZ		19	6		1990	865	17	7.3				
	608ZZ	9	22	7	0.3	3350	1400	340000	10	20	0.3	12	
	628ZZ		24	8		4000	1590	22	17				
	638ZZ		28	9	4560	1983	280000	26	30.3				
	689ZZ		9	17	5	0.2	1720	820	330000	10.6	15.4	0.2	3.2
	699ZZ	20		6	0.3	2480	1090	320000	11	18		8.2	
	609ZZ	24		7		3400	1450	310000	22	0.3	14		
	629ZZ	26		8	0.6	4550	1960	300000	13			20	

① SUS304材质仅适用带*规格。

① 1KgF=9.81N



请按图示订货

型号	代码	轴承型号	d
BAF...-E	682ZZ	2	
BAF...-E	692ZZ	2	
BAF...-E	602ZZ	2.5	

BAF682ZZ-E



未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期
5



① 深沟球轴承装配在导向块上, 对其他工件起到导向的作用。