


代码	类型	材质	最大压缩量
YSIL	轻载荷型	SWOSC-V	L×40%

□ L尺寸公差

L	公差
89以下	±1
102以上	±1%

- ① 载荷(±10%)
- ① 直角度(3°以下)
- ① 负载(N)=弹簧常数(N/mm)×压缩量
- ① 理论使用次数: 30万次(L×25%为100万次)
- ① 弹簧颜色和圈数可能会因生产批次不同而异, 但产品性能均符合标准, 不影响使用!
- ① 参考标准 ISO 10243-2019

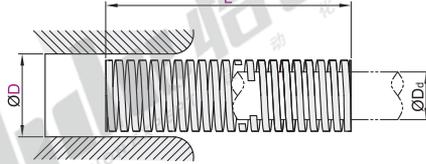

型号			外径 D _d	弹簧常数 N/mm	使用方法			
代码	孔径D	长度L			30万次 F=L×40% Fmm	负载N		
YSIL	10	-0.48 -1.18	5	+0.7 0	25	11	10	110
					32	8.5	12.8	108.8
					38	6.8	15.2	103.4
					44	6	17.6	105.6
					51	5	20.4	102
					64	4.1	25.6	105
	76	3.6	30.4	109.4				
	305	0.9	122	109.8				
	25	21	10	210				
	32	16.4	12.8	209.9				
	38	13.6	15.2	206.7				
	44	12.1	17.6	213				
	51	10.3	20.4	210.1				
	64	7.6	25.6	194.6				
	76	6.3	30.4	191.5				
	89	5.4	35.6	192.2				
	305	1.6	122	195.2				
	25	29	10	290				
	32	22.9	12.8	293.1				
	38	19.3	15.2	293.4				
	44	17.1	17.6	301				
	51	14	20.4	285.6				
	64	10.7	25.6	273.9				
	76	9	30.4	273.6				
89	7.3	35.6	259.9					
102	6.8	40.8	277.4					
305	2.3	122	280.6					
25	55.8	10	558					
32	45	12.8	576					
38	36	15.2	547.2					
44	30	17.6	528					
51	24.5	20.4	499.8					
64	19.2	25.6	491.5					
76	16	30.4	486.4					
89	14	35.6	498.4					
102	12	40.8	489.6					
115	10.9	46	501.4					
127	9.5	50.8	482.6					
139	8.4	55.6	467					
152	7.5	60.8	456					
305	4	122	488					
25	105	10	1050					
32	80.3	12.8	1027.8					
38	62	15.2	942.4					
44	52.9	17.6	931					
51	44	20.4	897.6					
64	35.2	25.6	901.1					
76	28	30.4	851.2					
89	24	35.6	854.4					
102	21.1	40.8	860.9					
115	18.7	46	860.2					
127	16.7	50.8	848.4					
139	15.3	55.6	850.7					
152	14	60.8	851.2					

型号			外径 D _d	弹簧常数 N/mm	使用方法			
代码	孔径D	长度L			30万次 F=L×40% Fmm	负载N		
YSIL	25	-0.5 -1.2	12.5	+1.2 +0.2	178	12.5	71.2	890
					203	10.4	81.2	844.5
					305	7	122	854
					38	98	15.2	1490
					44	79.5	17.6	1399
					51	67	20.4	1367
	64	53	25.6	1357				
	76	44	30.4	1338				
	89	37.2	35.6	1324				
	102	32	40.8	1306				
	115	29	46	1334				
	127	25	50.8	1270				
	139	23	55.6	1279				
	152	21.5	60.8	1307				
	178	18.2	71.2	1296				
	203	15.8	81.2	1283				
	254	12.5	102	1275				
	305	10.3	122	1257				
	51	92	20.4	1877				
	64	73	25.6	1869				
	76	63	30.4	1915				
	89	51	35.6	1816				
	102	45	40.8	1816				
	115	39.6	46	1822				
127	36	50.8	1829					
139	32	55.6	1779					
152	28	60.8	1702					
178	25.2	71.2	1794					
203	21.8	81.2	1770					
254	17	102	1734					
305	14.8	122	1806					
64	156	25.6	3994					
76	125	30.4	3800					
89	109	35.6	3880					
102	94	40.8	3835					
115	81	46	3726					
127	71	50.8	3607					
139	66.5	55.6	3697					
152	60	60.8	3648					
178	52	71.2	3702					
203	44	81.2	3573					
254	35	102	3570					
305	28.5	122	3477					
76	189	30.4	5746					
89	158	35.6	5625					
102	131	40.8	5345					
115	116	46	5336					
127	103	50.8	5232					
152	84.3	60.8	5125					
178	71.5	71.2	5091					
203	61.7	81.2	5010					
254	47	102	4794					
305	38.2	122	4660					

氮气
弹簧

C4



请按照图示订货 YSIL-D10-L25

代码	孔径D	长度L
YSIL	10	25
	32	



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7