





代码	类型	外框材质	轴承
ZHJ67	轴流风扇	DC型	PBT 双滚珠


长×宽×高: 40×40×10

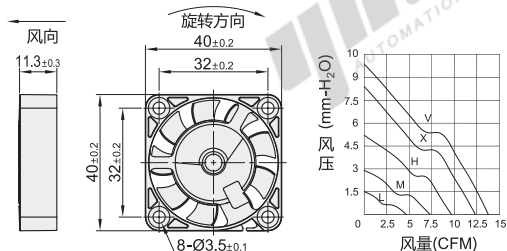


长×宽×高: 40×40×20

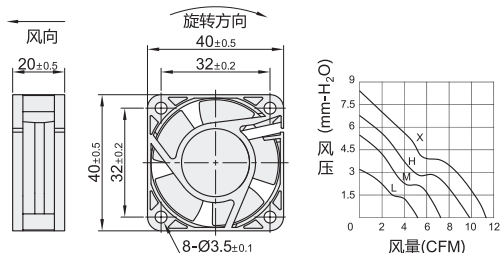


长×宽×高: 50×50×15

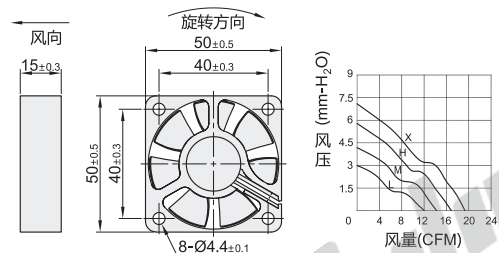


长×宽×高: 60×60×25

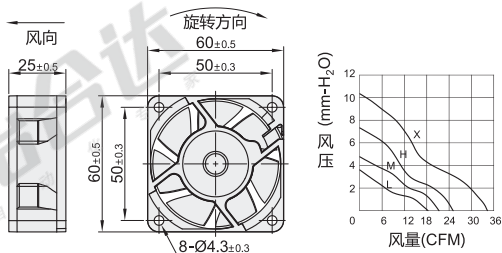


长×宽×高: 60×60×38

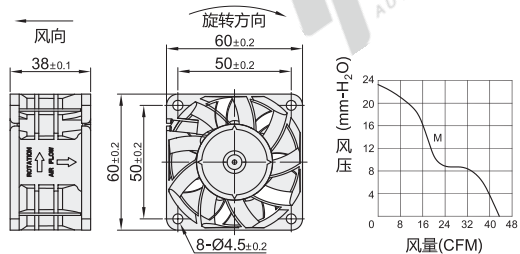


长×宽×高: 70×70×25

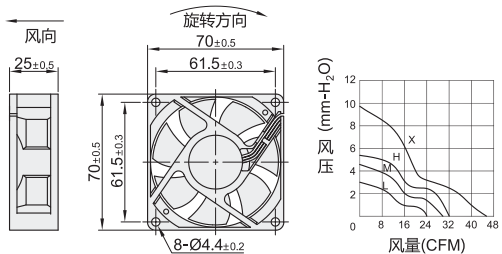

长×宽×高: 80×80×15

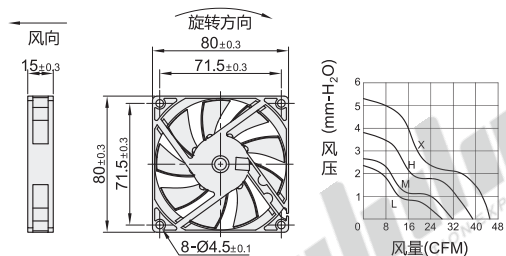

长×宽×高: 80×80×25

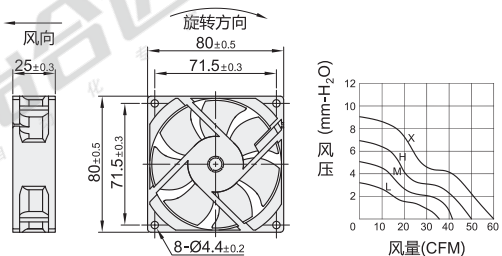


风扇


标准型 · DC轴流风扇

散热风扇


长×宽×高: 80×80×38

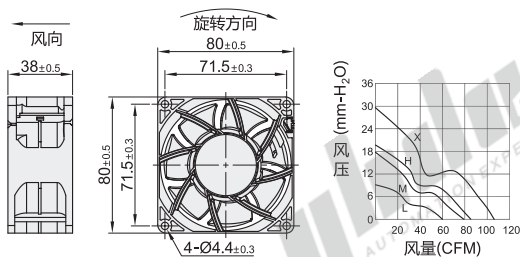


长×宽×高: 92×92×25

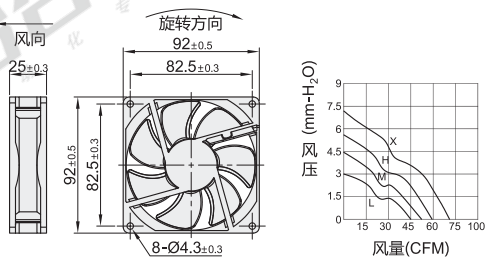


长×宽×高: 92×92×38

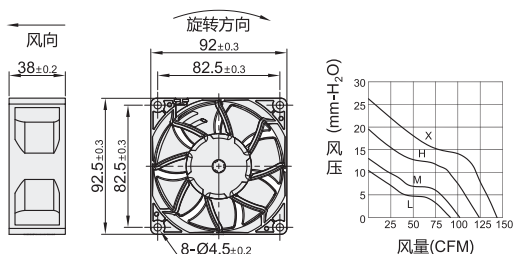

长×宽×高: 120×120×25

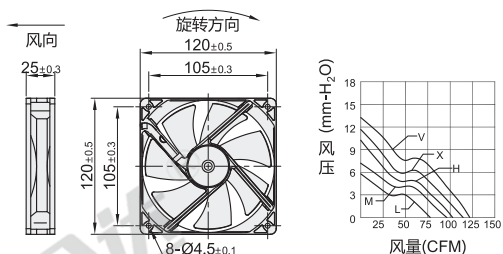

长×宽×高: 120×120×38

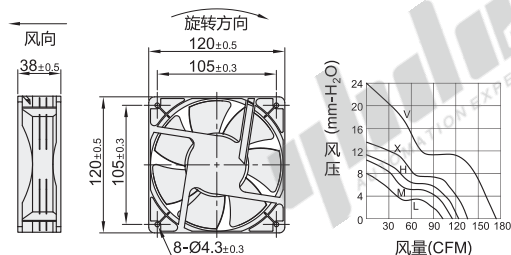

接线图

+	红色单线
-	黑色单线
FG	黄色单线
PWM	蓝色单线
RD(NPN)	白色单线

视角标准: 第一视角

型号	输出功能	长×宽×高	适用配件	输入电压	转速等级	电流 (A)	转速 (RPM)	风量 (CFM)	风压 (mm-H ₂ O)	噪音 (Db[A])
代码 规格										
4010B05LP				DC5V	L	0.14	4000	4.75	1.5	21
4010B05MP					M	0.18	6000	7.24	2.8	26
4010B05HP					H	0.29	8000	9.25	5.1	35
4010B12LP					L	0.10	4000	4.75	1.5	21
4010B12MP				DC12V	M	0.11	6000	7.24	2.8	26
4010B12HP		40×40×10			H	0.14	8000	9.25	5.1	33
4010B12XP					X	0.18	10000	12.23	8.4	39
4010B24MP	00(无功能)		防护网ZHJ42		M	0.06	6000	8	1.5	21
4010B24HP	0F(FG脉冲输出)		过滤网ZHJ41	DC24V	H	0.09	8000	9.25	5.1	33
4010B24XP	0R(RD停转输出)		或		X	0.09	9000	12.23	7.6	35
4010B24VP	1F(FG+PWM调速)		百叶窗ZHJ43		V	0.15	10000	12.23	8.4	39
4020B12LP	1R(RD+PWM调速)				L	0.1	5000	5.2	3.2	23
4020B12MP				DC12V	M	0.12	6500	7.1	5.3	27
4020B12HP					H	0.16	8500	9.7	6.5	36
4020B12XP		40×40×20			X	0.22	9500	11.1	8.1	37
4020B24LP					L	0.07	5000	5.2	3.2	23
4020B24MP				DC24V	M	0.09	6500	7.1	5.3	27
4020B24HP					H	0.13	8500	9.7	6.5	36
4020B24XP					X	0.15	10000	11.1	8.1	42

① 转速等级: L-低, M-标准, H-高, X-超高, V-极高。

型号	输出功能	长×宽×高	适用配件	输入电压	转速等级	电流 (A)	转速 (RPM)	风量 (CFM)	风压 (mm-H ₂ O)	噪音 (Db[A])
代码	规格									
ZHJ67	5015B12LP			DC12V	L	0.08	4000	12.2	3.0	27
	5015B12MP				M	0.10	5000	15.0	4.1	30
	5015B12HP				H	0.13	6000	17	5.8	32
	5015B12XP				X	0.18	7000	19	7.1	35
	5015B24LP	50×50×15		DC24V	L	0.08	4000	12.2	3.0	27
	5015B24MP				M	0.10	5000	14	4.1	30
	5015B24HP				H	0.13	6000	17	5.8	32
	5015B24XP				X	0.18	7000	19	7.1	35
	6025B12LP			DC12V	L	0.12	3600	18.5	3.6	31
	6025B12MP				M	0.16	4250	21.5	4.8	34
	6025B12HP				H	0.35	5000	25.6	6.6	40
	6025B12XP				X	0.40	6800	34.8	10.2	47
	6025B24LP	60×60×25		DC24V	L	0.08	3600	18.5	3.6	31
	6025B24MP				M	0.11	4250	21.5	4.8	34
	6025B24HP				H	0.2	5000	25.6	6.6	40
	6025B24XP				X	0.25	6800	34.8	10.2	47
	6025B48LP			DC48V	L	0.06	3600	18.5	3.6	31
	6025B48MP				M	0.07	4250	21.5	4.8	34
	6025B48HP				H	0.12	5000	25.6	6.6	40
	6038B24MP	60×60×38			M	0.52	8000	43.1	22.9	51
	7025B24LP				L	0.05	3000	24.5	3.0	27
	7025B24MP	70×70×25		DC24V	M	0.06	3600	29.7	4.4	32
	7025B24HP				H	0.08	4000	32.8	5.1	37
	7025B24XP				X	0.35	5500	45.12	9.5	45
	8015B12LP			DC12V	L	0.1	2700	27.5	2.3	30
	8015B12MP				M	0.12	3100	31.5	2.5	32
	8015B12HP				H	0.16	3600	37.6	3.8	36
	8015B12XP				X	0.3	4500	45.2	5.3	43
	8015B24LP	80×80×15		DC24V	L	0.06	2700	27.5	1.3	30
	8015B24MP				M	0.08	3100	31.5	2.3	32
	8015B24HP				H	0.1	3600	37.6	2.5	36
	8025B12LP				L	0.19	3000	35.4	3.6	33
	8025B12MP	80×80×25	防护网ZHJ42 过滤网ZHJ41 或 百叶窗ZHJ43	DC12V	M	0.23	3600	42.4	5.1	38
	8025B12HP				H	0.32	4300	50.5	6.9	43
	8025B12XP				X	0.5	5000	60	9.1	48
	8025B24LP				L	0.1	3000	35.4	3.6	33
	8025B24MP			DC24V	M	0.16	3600	42.4	5.1	38
	8025B24HP				H	0.23	4300	50.5	6.9	43
	8025B24XP				X	0.25	5000	60	9.1	48
	8025B48LP			DC48V	L	0.06	3000	35.4	3.6	33
	8025B48MP				M	0.09	3600	42.4	5.1	38
	8025B48HP				H	0.13	4300	50.5	6.9	43
	8025B48XP				X	0.21	5000	60	9.1	48
	8038B12LP			DC12V	L	0.40	4200	58.2	9.3	45
	8038B12MP				M	0.76	5600	78.8	17.2	53
	8038B12HP				H	1	6100	84.8	20.1	56
	8038B12XP				X	1.5	7500	105.5	29.5	62
	8038B24LP	80×80×38		DC24V	L	0.25	4200	58.2	9.3	45
	8038B24MP				M	0.35	5600	78.8	17.2	53
	8038B24HP				H	0.45	6100	84.8	20.1	56
	8038B24XP				X	0.82	7500	105.5	29.5	62
	9225B12LP			DC12V	L	0.11	2450	44.8	3.0	30
	9225B12MP				M	0.14	2850	52.1	4.3	34
	9225B12HP				H	0.20	3200	58.3	5.6	38
	9225B12XP				X	0.30	3800	69.2	7.1	45
	9225B24LP	92×92×25		DC24V	L	0.08	2450	44.8	3.0	25
	9225B24MP				M	0.13	2850	52.1	4.3	30
	9225B24HP				H	0.15	3200	56.8	5.6	38
	9225B24XP				X	0.2	3800	69.2	7.1	45
	9238B12LP			DC12V	L	0.5	4300	87.9	10.2	52
	9238B12MP				M	0.9	5000	102.1	13.5	58
	9238B12HP				H	1.2	6000	122.5	19.7	64
	9238B12XP				X	2.5	7000	143.1	26.8	67
	9238B24LP	92×92×38		DC24V	L	0.35	4300	87.9	10.2	52
	9238B24MP				M	0.45	5000	102.1	13.5	58
	9238B24HP				H	0.76	6000	122.5	19.7	64
	9238B24XP				X	1.1	7000	143.1	26.8	67

① 转速等级：L-低，M-标准，H-高，X-超高，V-极高。

风扇

标准型 · DC轴流风扇

散热风扇

型号		输出功能	长×宽×高	适用配件	输入电压	转速等级	电流(A)	转速(RPM)	风量(CFM)	风压(mm-H ₂ O)	噪音(Db[A])
代码	规格										
ZHJ67	1225B12LP	00(无功能) 0F(FG脉冲输出) 0R(RD停转输出) 1F(FG+PWM调速) 1R(RD+PWM调速)	120×120×25	防护网ZHJ42 过滤网ZHJ41 或 百叶窗ZHJ43	DC12V	L	0.3	2500	77.2	5.8	39
	1225B12MP					M	0.48	2800	86.7	7.1	42
	1225B12HP					H	0.5	3400	103.9	10.2	47
	1225B12XP					X	0.62	3700	114.8	11.7	50
	1225B12VP					V	0.65	4000	121.1	13.0	52
	1225B24LP				L	0.17	2500	90/77.2	5.8	39	
	1225B24MP				M	0.23	2800	86.7	7.1	42	
	1225B24HP				H	0.28	3400	103.9	10.2	47	
	1225B24XP				X	0.30	3700	114.8	11.7	50	
	1225B24VP				V	0.40	4000	121.1	13.0	52	
	1225B48LP				L	0.10	2500	56.9	5.8	39	
	1225B48MP				M	0.11	2800	69.6	7.1	42	
	1225B48HP				H	0.12	3400	99	10.2	47	
	1238B12LP	L	0.14	2300	101.4	8.1	38				
	1238B12MP	M	0.3	2600	114.7	10.4	41				
	1238B12HP	H	0.48	2900	123.2	11.4	44				
	1238B12XP	X	0.62	3200	135.9	13.7	48				
	1238B12VP	V	0.85	4200	178.4	23.9	54				
	1238B24LP	L	0.14	2300	101.4	8.1	38				
	1238B24MP	M	0.25	2600	114.7	10.4	41				
	1238B24HP	H	0.3	2900	123.2	11.4	44				
	1238B24XP	X	0.48	3200	135.9	13.7	44				
	1238B24VP	V	0.8	5000	172	23.9	60				
	1238B48LP	L	0.1	2300	101.4	8.1	38				
	1238B48MP	M	0.14	2600	114.7	10.4	41				
	1238B48HP	H	0.25	2900	123.2	11.4	44				
	1238B48XP	X	0.3	3200	135.9	13.7	48				
	1238B48VP	V	0.48	4200	178.4	23.9	54				

① 转速等级：L-低，M-标准，H-高，X-超高，V-极高。

性能参数

期望寿命	70000H, 在40℃, 15%~65%的湿度下
框叶材质	塑制: 阻燃材料, P.B.T(黑色)UL94V-0
风扇旋转锁定	在额定电压下锁住扇叶24小时, 当锁定解除后风扇仍能正常运转
极性保护	V _{CC} 与GND反接时, 回路不烧毁
绝缘阻抗	在本体与两条导线间加500V直流电压之间绝缘阻抗10MΩ以上
绝缘耐压	5mA Max/导线与外框之间测量, 500VAC/min
工作温度	-10℃~+70℃
工作湿度	15~65%RH
储存温度	-40℃~+70℃
储存湿度	15~65%RH



请按图示订货

型号		输出功能
代码	规格	
	1225B12LP	00(无功能)
ZHJ67	1225B12MP	0F(FG脉冲输出)
	1225B12HP	0R(RD停转输出)

ZHJ67 — 1225B12LP — 0F