

方形丝杠支座组件


支撑侧 侧面带孔型 带缓冲块型

代码	类型	材质				表面处理
		①	②	③	④	①③


- ① 轴承已经封入适量锂皂基抗极压润滑脂。
② 轴承为双铁盖。
③ 使用JIS 6级的径向轴承、最适用于高精度、高速旋转用途。

构成零件

编号	零件名称	数量
①	轴承座本体	1
②	径向轴承 6级	1
③	C型挡圈	1
④	聚氨酯缓冲块	1

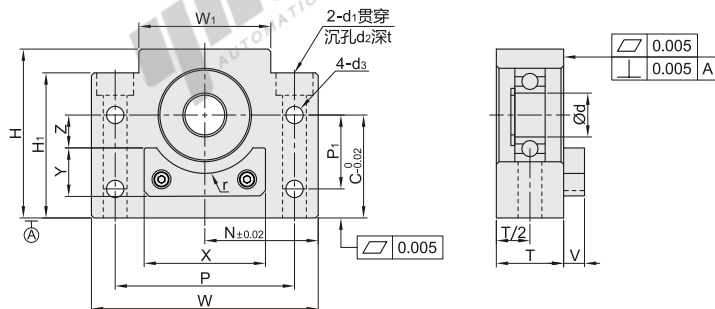

建议轴端加工尺寸

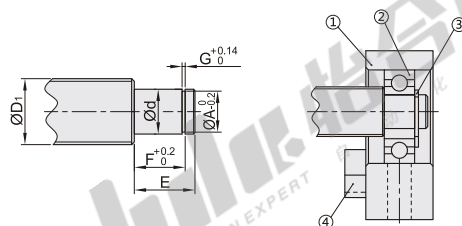

视角标准：第一视角

型号		Ød	T	W	H	C	W1	H1	P	P1	Ød1	Ød2	t	Ød3	N	缓冲块尺寸					建议轴端加工尺寸								使用 C型挡圈					
																					搭配 丝杠外径 ØD1	轴端部 外径 Ød	挡圈沟槽尺寸											
代码	规格															X	Y	Z	r	V														
LEB78	10	8			39	22	34	32.5	46	15			5		30		10	6	12		12/14/15	8 ^{+0.005} _{-0.012}	7.6	10	7.9	0.9							TBP01-8	
	12	10	20	60	43	25	35			18	6.6	11	1.5	5.5	34		13		14		14/15/16	10 ^{+0.005} _{-0.012}	9.6	11	9.15								TBP01-10	
	15	15			70	48	28	40	38	54			6.5		35	42	16		17		18/20	15 ^{+0.005} _{-0.014}	14.3	13	10.15	1.15							TBP01-15	
	17	17	23	86	64	39	50	55	68	28					43		19		22		20/25	17 ^{+0.005} _{-0.014}	16.2	16	13.15								TBP01-17	
	20	20	26	88	60	34	52	50	70	22	9	14	8.5	6.6	44		20		23		25/28/30	20 ^{+0.005} _{-0.014}	19	19	13.35								TBP01-20	
	25	25	30	106	80	48	64	70	85		11	17.5	11	9	53	66	23	13	28	10	30/32/36	25 ^{+0.005} _{-0.014}	23.9	20	16.35	1.35							TBP01-25	
	30	30	32	128	89	51	76	78	102						64	80	28	15	33		36/40	30 ^{+0.005} _{-0.015}	28.6	21	17.75								TBP01-30	
	35	35	32	140	96	52	88	79	114	35		14	20	13	11	70	88	32	17	38		40/45	35 ^{+0.008} _{-0.018}	33	22	18.75	1.75							TBP01-35
	40	40	37	160	110	60	100	90	130	37	18	26	17.5	14	80	100	35	20	42		50	40 ^{+0.008} _{-0.018}	38	23	19.95	1.95							TBP01-40	
	50	50	40	170	130	70	106	95	138	40					85	108	38	23	47		63	50 ^{+0.008} _{-0.018}	47	27	22.2	2.2							TBP01-50	



型号	
代码	规格
LEB78	10
	12

LEB78—10



优惠价	
数量	价格
1~4	100%
5~	另行报价

未税价(元)

交货期	
数量	交货期
1~4	7
5~	

交货期