





代码	类型	销售方式	公差等级	材质		硬度	强度等级
				国标	相当		
TBH15	L尺寸选择型	PCS	g6	35CrMo	SCM435	33~38HRC	10.9
TBH16				0Cr18Ni9	SUS304	—	A2-50
PACK-TBH15				35CrMo	SCM435	33~38HRC	10.9
PACK-TBH16				0Cr18Ni9	SUS304	—	A2-50
PACK-TBH19				35CrMo	SCM435	33~38HRC	10.9
PACK-TBH20	L.F尺寸指定型	袋	h7	0Cr18Ni9	SUS304	—	A2-50
PACK-TBH26				35CrMo	SCM435	30~35HRC	10.9
PACK-TBH44				35CrMo	SCM435	33~38HRC	10.9
PACK-TBH45				0Cr18Ni9	SUS304	—	A2-50
PACK-TBH46				35CrMo	SCM435	33~38HRC	10.9
PACK-TBH47				0Cr18Ni9	SUS304	—	A2-50

① 如对产品防锈有要求, 请优先选择SUS304材质产品。


L尺寸选择型(公差等级: g6/h7)  
PACK-TBH15/16/19/20  
TBH15/16

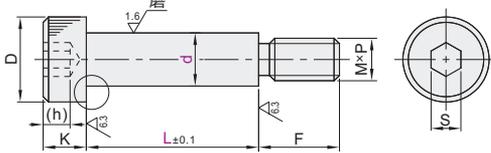


L尺寸选择型(公差等级: e9)  
PACK-TBH26

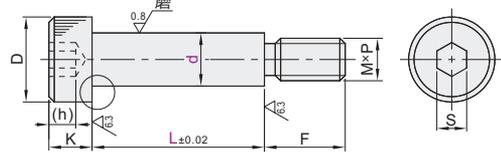

L.F尺寸指定型  
PACK-TBH44/45/46/47

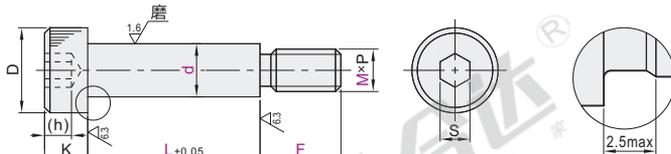

② d=M时



② d=M时不带退刀槽, F为螺纹有效长度。因此, L尺寸中会产生螺距量约为1~2的不完整螺纹部。

③ h值测量误差较大, 仅供参考。



④ L尺寸选择型(公差等级: g6/h7)

型号		d		L							PCS/袋	M	P 螺距	D	S	(h)	K	F			
代码	销售方式: PCS (g6)	销售方式: 袋 (g6)	g6	h7	10	15	20	25	30	35	40	45	50	20	2.5	0.45	6.5	2.5	1.6	3	5
TBH15	4	5	-0.004	0	10	15	20	25	30	35	40	45	50	20	3	0.5	8	2.5	1.6	3.5	6
TBH16	6	6	-0.012	-0.012	10	15	20	25	30	35	40	45	50	20	4	0.7	9	3	2	4	7
PACK-TBH15	8	8	-0.005	0	10	15	20	25	30	35	40	45	50	20	6	1	13	5	3	6	9
PACK-TBH19	10	10	-0.014	-0.015	10	15	20	25	30	35	40	45	50	20	8	1.25	16	6	4	8	12

④ L尺寸选择型(公差等级: e9)

代码	型号	d <sub>e9</sub>	L							PCS/袋	M	P 螺距	D	S	(h)	K	F	
PACK-TBH26	6.5	6.5	10	15	20	25	30	40	20	5	0.8	10	4	2.5	5	9		
	8	8	10	15	20	25	30	35		40	45	6	1	13	5	3	6	9
	10	10	10	15	20	25	30	35		40	45	8	1.25	16	6	4	8	12
	13	13	15	20	25	30	35	45		50	10	1.5	18	8	5	10	16	
	16	16	20	25	30	3	4	5		6	12	1.75	24	10	7	14	18	
	20	20	25	30	16	2	27	14		9	18	24						

④ L.F尺寸指定型

代码	型号	d	g6	h7	L 最小单位0.1	F 最小单位0.5	M	PCS/袋	D	S	(h)	K		
(g6)	4	4			10.0~40.0	3.0~8.0	3 4	20	7	2.5	1.6	3		
	PACK-TBH44	4.5	-0.004	0									4.0~10.0	3 4 5
	PACK-TBH45	5	-0.012	-0.012									4.0~10.0	3 4 5
(h7)	6	6			10.0~40.0	5.0~12.0	4 5 6	20	10	4	2.5	5		
	PACK-TBH46	6.5	-0.005	0									6.0~16.0	5 6 8
	PACK-TBH47	8	-0.014	-0.015									6.0~16.0	5 6 8
	PACK-TBH47	10	-0.040	-0.042									8.0~20.0	6 8 10

④ L.F尺寸指定型(螺距)

M	P 螺距
3	0.5
4	0.7
5	0.8
6	1
8	1.25
10	1.5

④ L.R尺寸选择型(公差等级: g6)

代码	型号	d	L
PACK-TBH15	4	4	10~15 20
PACK-TBH16	5	5	10~15 20

④ L.F尺寸指定型

代码	型号	d	L 最小单位0.1	F 最小单位0.5	M
PACK-TBH44	4.5	4.5	10.0~20.0	3.0~8.0	3 4
PACK-TBH45	5	5	10.0~20.0	4.0~10.0	3 4 5



● 优惠价  
数量 1~49 50~  
价格 100% 另行报价



10



● 优惠价  
数量 1~2 3~  
价格 100% 另行报价

④ 其余