


成对双联角接触球轴承

组合型·DB/DF/DT配对·带密封圈

标准型 接触角25°




-DB(反面)

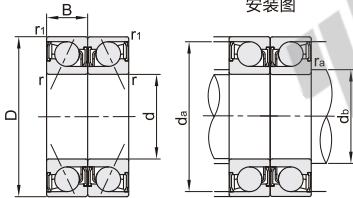


安装图

-DF(正面)



安装图

-DT(串联)



安装图



视角标准：第一视角

型号		组合形式	d	D	B	r min	r1 min	基本额定负载 (KN)		极限转速 rpm(参考)		安装尺寸									重量 (kg) 参考	
代码	轴承型号							Cr(动)	Cor(静)	脂润滑	油润滑	DB			DF			DT				
												db min	da max	ra max	db min	da max	ra max	db min	da max	ra max		
BEQ06	7000-2RZ	DB (反面)	10	26	8	0.3	0.15	6.92	4	16000	22000	12.5	24.8	0.3	11.2	23.5	0.15	12.5	23.5	0.3	0.08	
	7200-2RZ			30	9	0.6	0.3	7.04	4.16		14000	19000	15	27.5	0.6	12.5	25	0.3	15	25	0.6	0.13
	7001-2RZ		12	28	8	0.3	0.15	7.52	4.64			14.5	26.8	0.3	13.2	25.5	0.15	14.5	25.5	0.3	0.08	
	7201-2RZ			32	10	0.6	0.3	10.24	6.16		12000	17000	17	29.5	0.6	14.5	27	0.3	17	27	0.6	0.15
	7002-2RZ	DB (反面)	15		9	0.3	0.15	8.08	5.4			17.5	30.8	0.3	16.2	29.5	0.15	17.5	29.5	0.3	0.12	
	7202-2RZ			11	0.6	0.3	11.28	7.24		11000	16000	20	32.5	0.6	17.5	30	0.3	20	30	0.6	0.18	
	7003-2RZ	DF (正面)	17		10	0.3	0.15	8.56	6.08			19.5	33.8	0.3	18.2	32.5	0.15	19.5	32.5	0.3	0.16	
	7203-2RZ			40	12	0.6	0.3	14.08	9.36	10000	13000	22	37.5	0.6	19.5	35	0.3	22	35	0.6	0.27	
	7004-2RZ	DT (串联)	20		14	1	0.6	18.88	12.88	8800	12000	25	39.5		22.5	37		25	37			
	7204-2RZ			47	12	0.6	0.3	15.2	11.84	8000	11000	30	44.5	0.6	27.5	42	0.3	30	42	0.6	0.32	
	7005-2RZ	DT (串联)	25		52	15		21.6	16.32	7600	10000	31	47		30	46		31	46		0.52	
	7205-2RZ			55	13			19.68	16.4	6800	9600		50		35	49	0.6		49		0.46	
	7006-2RZ	DT (串联)	30		16	1	0.6		30	23.44	6400	8800	36			35			36			
	7206-2RZ			62	14			24.8	21.84	6000	8000	41	57	1	40	56	1	41	56	1	0.79	
	7007-2RZ		35		40	15		26.8	25.6	5360	7200	46	63		45	62	0.6	46	62		0.61	
	7008-2RZ		40	68	15			31.2	30.8	4800	6800	51	70		50	69	1	51	69		0.76	
	7009-2RZ		45	75	16																1	



请按图示订货

型号		组合形式
代码	轴承型号	
BEQ06	7000-2RZ	DB DF DT
	7200-2RZ	

BEQ06—7000DB-2RZ



未税价(元)

优惠价	
数量	1~9
价格	100% 另行报价



交货期	
数量	6

1Kg=9.81N