


精密型 快速排气阀

- 标准型 · 带排气节流阀/带快装配接头
- 迷你型 · 直联型/带排气节流阀

标准型 · 带排气节流阀


代码	类型	材质
J-XZN01	标准型 带排气节流阀	铝合金

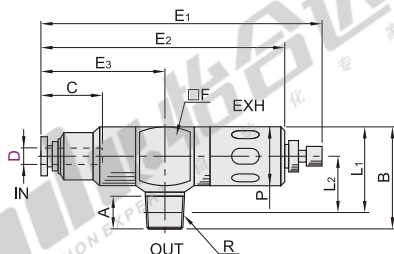

型号		公称型号	R	A	B	L ₁	L ₂	P	C	E ₁		E ₂	E ₃	F	有效断面积 (mm ²)		重量 (g)
代码	D									max	min				IN → OUT	OUT → EX	
J-XZN01	4	1	R1/8	8	25.5	21.5	14	15	10.9	66.7	61.8	54.3	23.8	15	4	8	23
	6	1	R1/8	8	29				11.7	77.4	71.6	63.1	28.1		9		35
		2	R1/4	11	31												37
	8	1	R1/8	8	29	25	16	18						18		15	39
		2	R1/4	11	31				18.2	82.7	76.9	68.4	33.4		12		41
		2	R1/4	11		34.5	22								24		97
	10	3	R3/8	12	40.5	34.2	21.7	25	20.7	112.7	105.3	95.8	42.8	25	25	31	98
		4	R1/2	15	42.5	42.5	21.8								27	34	102

标准型 · 带快装配接头



代码	类型	材质
J-XZN11	标准型 带快装配接头	铝合金

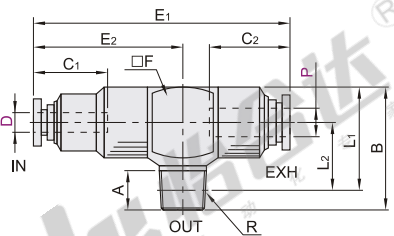

型号		P	公称 型号	R	A	B	L ₁	L ₂	C ₁	C ₂	E ₁	E ₂	F	有效断面积 (mm ²)		重量 (g)
代码	D													IN→OUT	OUT→EX	
J-XZN11	4	8	1	R1/8	8	25.5	21.5	14	10.9	18.2	46.5	23.8	15	4	9	19
	6		2	R1/4	11	29			11.7		54.4	28.1		9		27
		10	1	R1/8	8		25	16		20.7			18		16	29
	8		1	R1/8	8	31			18.2		59.7	33.4		12		31
			2	R1/4	11											33
			2	R1/4	11		34.5	22						24	34	69
	10	12	3	R3/8	12	40.5	34.2	21.7	20.7	22.3	74.6	42.8	25	25	35	72
			4	R1/2	15	42.5	34.3	21.8						27	37	77


迷你型 · 直联型

代码	类型	材质
J-XZN51	迷你型 直通型	PBT



迷你型 · 带排气节流阀

代码	类型	材质
J-XZN61	迷你型 带排气节流阀	PBT



型号		B	L	P ₁	P ₂	P ₃	C	有效断面积 (mm ²)		重量 (g)
代码	D							IN → OUT	OUT → EX	
J-XZN51	4	34	11	8.4	10	9	11	1.8	1.8	3.3
	6	37	12	10.4	12	11	11.6	4	4	4.9

型号		B	L ₁	L ₂	L ₃	L ₄	P ₁	P ₂	P ₃	C	E	有效断面积 (mm ²)		重量 (g)
代码	D					max min						IN → OUT	OUT → EX	
J-XZN61	4	27.3	34.6	11.2	18.5	17.4	13.5	9	10	8.4	11	1.8	1.7	8
	6	29	37	12	20	19	14	11	12	10.4	11.6	4	3.2	11

标准型 · 带排气节流阀

型号	公称型号
J-XZN01	6 2
	8 1

标准型 · 带快装配接头

型号	公称型号
J-XZN11	6 2
	8 1

迷你型 · 直联型

型号	B
J-XZN51	4 34
	6 37



J-XZN01 - D6 - 2

J-XZN11 - D6 - P10 - 2

J-XZN51 - D4



优惠价
数量 1~29 30~
价格 100% 另行报价

未税价(元)



交货期
9

气调
动速
接阀
类