


电动位移台



- 规格：6030

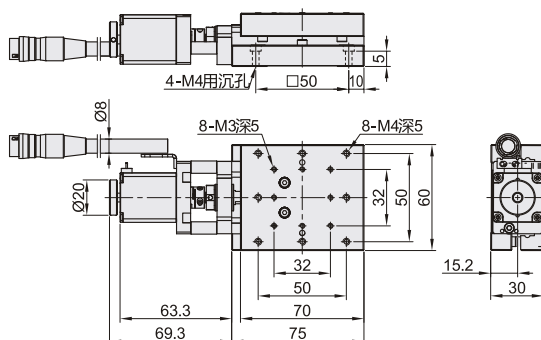

Technical drawing of the 8M4000-10000 series hydraulic cylinder, showing front, side, and end views with dimensions in mm.

Front View Dimensions:

- Stroke: 110
- Tube OD: 110
- Mounting Flange OD: 150
- Mounting Flange Thickness: 15
- Mounting Flange Bolt Circle: 8-M4用沉孔

Side View Dimensions:

- Tube OD: 110
- Mounting Flange OD: 150
- Mounting Flange Thickness: 15
- Mounting Flange Bolt Circle: 8-M4用沉孔

End View Dimensions:

- Tube OD: 110
- Mounting Flange OD: 150
- Mounting Flange Thickness: 15
- Mounting Flange Bolt Circle: 8-M4用沉孔

Technical drawing showing the front view of the tool holder assembly. The drawing includes dimensions: Ø8, 2, and 75.1.

Technical drawing of the 3000 series gear pump, showing side and front views with dimensions.

Side View Dimensions:

- Shaft diameter: $\varnothing 8$
- Shaft length: 8.5
- Body height: 42
- Body width: 50.8

Front View Dimensions:

- Top flange outer diameter: $\varnothing 30^{+0.03}_{-0}$
- Top flange hole diameter: 联轴器 $\varnothing 8$
- Top flange hole pitch: 4-M3深8
- Top flange hole pitch circle diameter: P.C.D45
- Bottom flange outer diameter: 40
- Bottom flange hole diameter: 15.2
- Bottom flange hole pitch: 30

Technical drawing of the P.C.D46 pump assembly, showing side and front views with dimensions.

Side View Dimensions:

- Shaft diameter: $\varnothing 8$
- Shaft length: 8.5
- Motor body height: 42
- Motor body width: 50.8

Front View Dimensions and Labels:

- Top mounting hole diameter: $\varnothing 30^{+0.03}$
- Top mounting hole label: 联轴器 $\varnothing 8$
- Mounting holes: 4-M4深8
- Bottom mounting hole diameter: $\varnothing 15.2$
- Bottom mounting hole label: P.C.D46
- Bottom mounting hole distance from center: 30
- Bottom mounting hole distance from edge: 40

视角标准：第一视角

电动位移台

X轴·线性滚珠引导式 滚珠丝杠传动 光电开关内藏式

型号		驱动器选择	线缆选择	电机端选择	最大速度 (mm/sec)
代码	规格				
E-EHX11	6020	N(无驱动器) A(怡合达脉冲驱动器) B(鸣志脉冲驱动器) G(鸣志EC总线驱动器)	N(无) 2(2m长线缆) 4(4m长线缆) 5(5m长线缆) 7(7m长线缆) 10(10m长线缆)	无指定(两相步进电机) M22C(鸣志闭环步进电机)	10
	6030	① 驱动器详细对应参数见怡合达电商平台对应产品型号的(驱动器选择)模块按需下载。	① 接头类型: HRS-12P接头	U45(PCD45伺服电机座) U46(PCD46伺服电机座)	
	6050	NN(无电机/无驱动器)			

① 自备线缆时, 请使用HR10A-10P-12S(73)(HRS)12针插孔接头。 ① 传感器: NPN开路输出, 原点+限位, 传感器电压24V, 8mA以下。

① 需接地线, 避免静电干扰。 ① 位移台使用为弱电, 与强电线缆共同排布时会出现信号干扰, 请务必采取屏蔽措施。

型号		台面尺寸 (mm)	行程 (mm)	单向定位精度 (μm)	重复定位精度 (μm)	反向间隙 (μm)	平行度 (μm)	直线度 (μm)	载重 (kgf)	重量 (kg)
代码	规格									
E-EHX11	6020	60×60	±10						10	0.75
	6030	60×70	±15	<15	±1.5	<3	<15	<3	(竖直/侧装负载<3kg)	0.87
	6050	60×80	±25							0.99



请按图示订货

型号		驱动器选择	线缆选择	电机端选择
代码	规格			
E-EHX11	6020 6030	N(无驱动器) A(怡合达脉冲驱动器) B(鸣志脉冲驱动器)	N(无) 2(2m长线缆) 4(4m长线缆)	无指定(两相步进电机) M22C(鸣志闭环步进电机)

E-EHX11 — 6030 — A — 4

型号		驱动器选择	线缆选择	电机端选择
代码	规格			
E-EHX11	6020 6030	NN(无电机/无驱动器)	N(无) 2(2m长线缆) 4(4m长线缆)	U45(PCD45伺服电机座) U46(PCD46伺服电机座)

E-EHX11 — 6030 — NN — 4 — U45



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

5