



ST、ST-B型

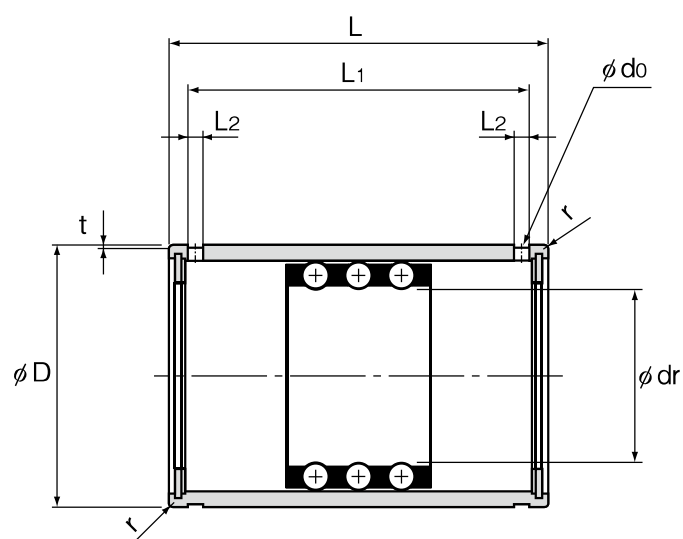

ST型
(轻负荷用)

公称型号	最大行程				
		内径直径		外径	
		dr	公差	D	公差
ST 6	14	6	+0.018 +0.010	12	0 -0.008
ST 8 ST 8B	24 8	8	+0.022 +0.013	15	
ST 10 ST 10B	30 8	10		19	0 -0.009
ST 12 ST 12B	32 8	12	+0.027 +0.016	23	
ST 16 ST 16B	40 16	16		28	
ST 20 ST 20B	54 28	20	+0.033 +0.020	32	0 -0.011
ST 25 ST 25B	54 28	25		37	
ST 30 ST 30B	82 44	30		45	
ST 35 ST 35B	92 54	35	+0.041 +0.025	52	0 -0.013

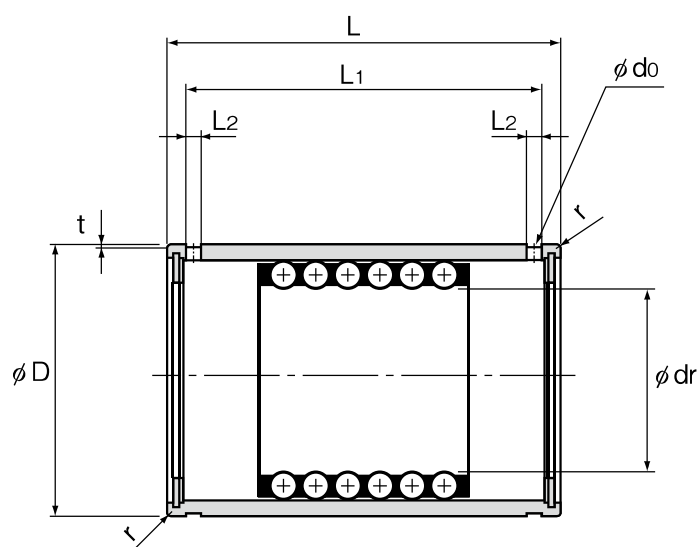


ST-B型
(中负荷用)

单位：mm


								基本动 额定载荷	基本静 额定载荷	质量
长度		公差	L ₁	L ₂	t	d ₀	r	C kN	C ₀ kN	g
L										
19	0 -0.2		13.5	1.1	0.25	—	0.3	0.98	0.23	8
24			20.1	1.5	0.5	1.5	0.5	0.98 2.06	0.27 0.55	16.4 17.6
30			25.7	1.5	0.5	1.5	0.5	2.35 4.61	0.62 1.27	31.5 34.5
32			27.5	1.5	0.5	1.5	0.5	4.02 8.14	1.08 2.25	47 53.5
37			32.1	1.5	0.5	1.5	0.5	4.02 8.04	1.27 2.65	77 85
45	0 -0.3		39.8	2	0.5	2	0.5	4.12 8.33	1.57 3.24	109 120
45			39.8	2	0.5	2	1	4.12 8.14	1.76 3.63	128 142
65			58.5	2.5	0.5	2.5	1	9.31 18.7	4.12 8.14	240 275
70			63.5	2.5	0.7	2.5	1.5	9.41 18.7	4.51 9.02	370 410

ST、ST-B型

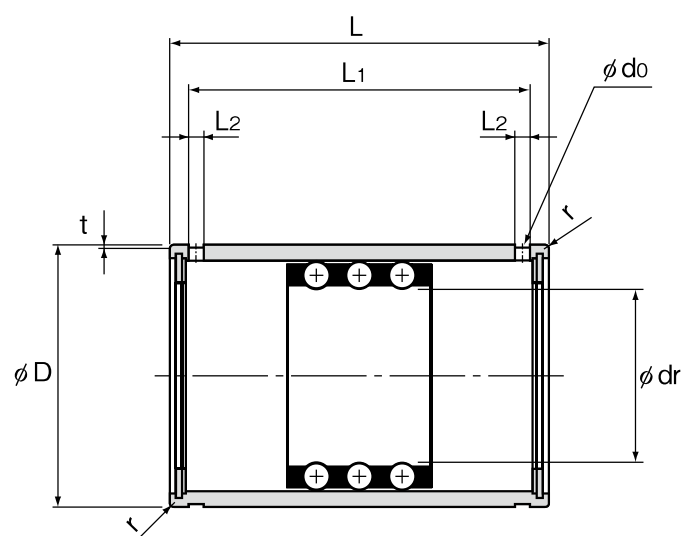

ST型
(轻负荷用)

公称型号	最大行程				
		内径直径		外径	
		dr	公差	D	公差
ST 40 ST 40B	108 66	40	+0.041 +0.025	60	0 -0.013
ST 45 ST 45B	108 66	45		65	
ST 50 ST 50B	138 88	50		72	
ST 55 ST 55B	138 88	55	+0.049 +0.030	80	0 -0.015
ST 60 ST 60B	138 88	60		85	
ST 70 ST 70B	138 88	70		95	
ST 80 ST 80B	132 76	80	+0.058 +0.036	110	0 -0.018
ST 90 ST 90B	132 76	90		120	
ST 100 ST 100B	132 76	100		130	

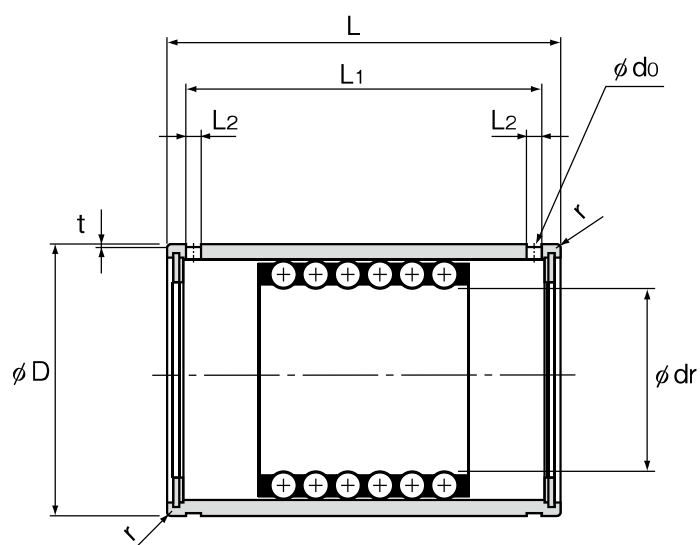

ST-B型
(中负荷用)

单位：mm

								基本动 额定载荷	基本静 额定载荷	质量
长度		公差	L ₁	L ₂	t	d ₀	r	C kN	C ₀ kN	g
L										
80		0 -0.3	73.3	2.5	0.7	2.5	1.5	12.5 25	6.18 12.4	570 635
80			73.3	2.5	0.7	2.5	1.5	12.6 25.2	6.76 13.5	625 695
100			92.4	3	1	3	1.5	16.3 32.5	8.82 17.7	910 1020
100			92.4	3	1	3	2	16.6 33	9.71 19.3	1270 1380
100		0 -0.4	92.4	3	1	3	2	16.8 33.6	10.5 21	1360 1480
100			92.4	3	1	3	2	16.9 33.8	11.7 23.3	1530 1670
100			92	3	1.5	3	2	21.3 42.5	15.3 30.6	2220 2430
100			92	3	1.5	3	2	21.7 43.3	16.9 33.7	2440 2670
100			92	3	1.5	3	2	22 43.9	18.3 36.8	2670 2910