


## 定位销



来图定制

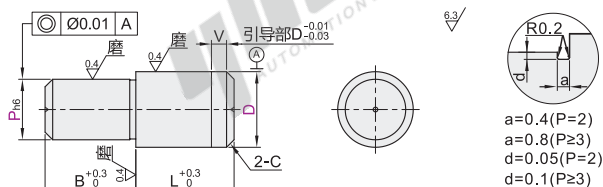

| P        | h6          |
|----------|-------------|
| 1.50~3   | 0<br>-0.006 |
| 3.01~6   | 0<br>-0.008 |
| 6.01~10  | 0<br>-0.009 |
| 10.01~18 | 0<br>-0.011 |
| 18.01~20 | 0<br>-0.013 |



视角标准：第一视角

| 型号                                                                                                               |    | D公差    |        | 最小单位0.01    | L  | B  | V | C   |
|------------------------------------------------------------------------------------------------------------------|----|--------|--------|-------------|----|----|---|-----|
| 代码                                                                                                               | D  | m6     | p6     | P           |    |    |   |     |
| Dm6    Dp6<br>YGP81   YGP91<br>YGP82   YGP92<br>YGP83   YGP93<br>YGP88   YGP98<br>YGP89   YGP99<br>YGP86   YGP96 | 2  | +0,008 | +0,012 | 1.50~2.00   | 4  |    | 0 | 0.1 |
|                                                                                                                  | 3  | +0,002 | +0,006 | 1.50~3.00   |    |    |   |     |
|                                                                                                                  | 4  |        |        | 2.00~4.00   | 5  | 3  |   |     |
|                                                                                                                  | 5  | +0,012 | +0,020 | 2.00~5.00   | 8  |    | 1 | 0.5 |
|                                                                                                                  | 6  | +0,004 | +0,012 | 2.00~6.00   | 10 |    |   |     |
|                                                                                                                  | 8  |        |        | 3.00~8.00   | 12 | 4  |   |     |
|                                                                                                                  | 10 | +0,015 | +0,024 | 3.00~10.00  | 16 |    |   | 1   |
|                                                                                                                  |    | +0,006 | +0,015 |             |    | 5  |   |     |
|                                                                                                                  | 12 |        |        | 5.00~12.00  | 20 | 6  |   |     |
|                                                                                                                  | 13 | +0,018 | +0,029 | 6.00~13.00  |    | 10 | 2 | 1.5 |
|                                                                                                                  |    | +0,007 | +0,018 |             | 22 |    |   | 2   |
|                                                                                                                  | 16 |        |        | 10.00~16.00 |    | 12 |   | 3   |
|                                                                                                                  | 20 | +0,021 | +0,035 | 13.00~20.00 | 30 | 20 |   |     |
|                                                                                                                  |    | +0,008 | +0,022 |             |    |    |   |     |



| 型号    |   | P         | L |
|-------|---|-----------|---|
| 代码    | D |           |   |
| YGP81 | 2 | 1.50~2.00 | 4 |
| YGP82 | 3 | 1.50~3.00 | 5 |

YGP81—D2—P2

| 型号    |    | P           | 可选加工代码 |
|-------|----|-------------|--------|
| 代码    | D  |             |        |
| YGP81 | 16 | 10.00~16.00 | RC CN  |
| YGP82 | 20 | 13.00~20.00 |        |

YGP81—D16—P16—CN



|    |      |      |
|----|------|------|
| 数量 | 1~4  | 5~   |
| 价格 | 100% | 另行报价 |



○



| 代码 | 技术说明                                                                                                                                                                 |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RC | <p><b>变更颈部退刀槽为R0.5</b></p> <p><u>选型方法</u> RC</p> <p><b>!</b> D-P &lt; 2时，不适用</p>  |



| 代码 | 技术说明                                                                                                                                                                                     |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CN | <p><b>变更倒角C</b></p>  <p><b>选型方法</b> CN</p> <p>变更P尺寸部的倒角为C0.5以下</p> <p>❶ D≤3时，不适用</p> <p>❶ 仅适用P尺寸部</p> |

## 夹具用衬套 定位销

A6