



代码	类型	材质	防火等级
ZIL54	多孔型	尼龙66	UL94 V-2

■ 特点

- 适用需要整合多条电缆线，且有防尘防水要求的场景，可将这些电缆线集中连接到一个接头上。
- 多孔型固定头能够减少接头数量，节省因多电缆线需多个接头安装所占用的空间，缩短安装时间，同时降低设备成本。

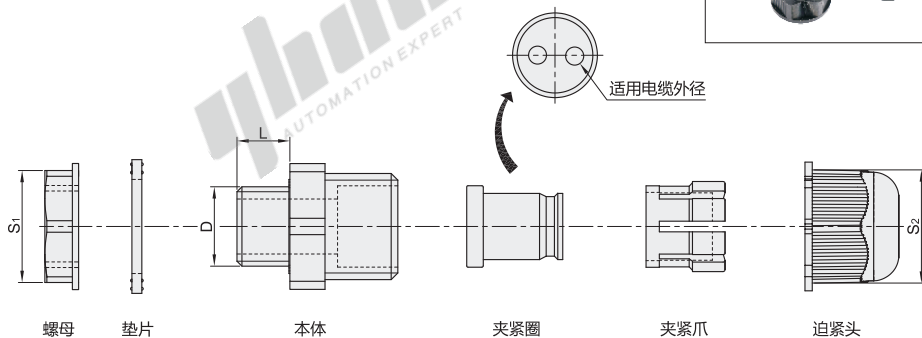

■ 孔位图



■ 公制螺纹(M系列螺纹)

型号			颜色	螺牙规格	适用电缆 外径	螺纹外径 D	面板开孔 直径	螺纹长度 L	螺母扳手 S ₁	迫紧头扳手 S ₂
代码	孔数	螺纹规格								
ZIL54	1(1扁孔)	M16	B(黑色) W(灰白色)	M16×1.5	6×10	16	16~16.3	15	22	22
		M20		M20×1.5	7×14	20	20~20.3		27	27
		M25		M25×1.5	7×14	25	25~25.3		33	33
		M32		M32×1.5	8×22	32	32~32.3		41	42
	2(2孔)	M40		M40×1.5	5.5×29	40	40~40.3	20		
		M12		M12×1.5	1.2~3	12	12~12.3	8.5	18	19
		M16		M16×1.5	1.6~4.1	16	16~16.3		22	22
		M20		M20×1.5	2.5~6.1	20	20~20.3		27	27
	3(3孔)	M25		M25×1.5	2~5.2	25	25~25.3	15	33	33
		M25B		M25×1.5	4.5~8.7	25	25~25.3			
		M32		M32×1.5	5~10	32	32~32.3		41	41
		M12		M12×1.5	1.2~2.6	12	12~12.3	8.5	18	19
	4(4孔)	M16		M16×1.5	1.6~4.2	16	16~16.3		22	22
		M20		M20×1.5	2~5.2	20	20~20.3		27	27
		M25		M25×1.5	2~5.2	25	25~25.3	15	33	33
		M25B		M25×1.5	4~8	25	25~25.3			
	5(5孔)	M32		M32×1.5	5~10	32	32~32.3		41	42
		M12		M12×1.5	1.2~2.3	12	12~12.3	8.5	18	19
		M16		M16×1.5	1.2~3.4	16	16~16.3		22	22
		M20		M20×1.5	1.5~3.6	20	20~20.3		27	27
	6(6孔)	M25		M25×1.5	2~5.2	25	25~25.3		33	33
		M25B		M25×1.5	3.5~7.3	25	25~25.3			
		M32		M32×1.5	4.5~9	32	32~32.3		41	42
		M20		M20×1.5	1.2~3.1	20	20~20.3		27	27
	7(7孔)	M25		M25×1.5	1.5~3.6	25	25~25.3	15	33	33
		M25B		M25×1.5	3~6	25	25~25.3			
		M32		M32×1.5	4~8	32	32~32.3		41	42
		M25		M25×1.5	2.4~5.2	25	25~25.3		33	33
	8(8孔)	M32		M32×1.5	3.5~7	32	32~32.3		41	42
		M20		M20×1.5	1.2~3	20	20~20.3		27	27
		M25		M25×1.5	1.5~3	25	25~25.3		33	33
		M32		M32×1.5	3~6	32	32~32.3		41	42
	8(8孔)	M20		M20×1.5	1.2~2.5	20	20~20.3		27	27
		M25		M25×1.5	1.5~3	25	25~25.3		33	33

德标螺纹(PG系列螺纹)

型号			颜色	螺牙规格	适用电缆 外径	螺纹外径 D	面板开孔 直径	螺纹长度 L	螺母扳手 S ₁	迫紧头扳手 S ₂
代码	孔数	螺纹规格								
ZIL 54	1(1扁孔)	PG9		PG9	6×10	15.2	15.2~15.8	8.2	22	19
		PG13.5		PG13.5	7×14	20.4	20.4~20.7	10	27	24
		PG16		PG16	7×14	22.5	22.5~22.8	10.8	30	27
		PG21		PG21	8×22	28.3	28.3~28.7	12	36	33
		PG36		PG36	5.5×29	47	47~47.4	14	51	52
		PG7		PG7	1.2~3.1	12.5	12.5~12.8	8	17	
		PG9		PG9	1.6~3.1	15.2	15.2~15.8	8.2	22	19
		PG13.5		PG13.5	3.5~5.2	20.4	20.4~20.7	10	27	24
	2(2孔)	PG16		PG16	4.3~6.1	22.5	22.5~22.8	10.8	30	27
		PG21		PG21	6.4~8.7	28.3	28.3~28.7	12	36	33
		PG29		PG29	7.7~10	37	37~37.4		46	41
		PG7		PG7	1.6~2.6	12.5	12.5~12.8	8	17	
		PG9		PG9	1.6~2.6	15.2	15.2~15.8	8.2	22	19
		PG13.5		PG13.5	3.5~5	20.4	20.4~20.7	10	27	24
		PG16		PG16	3.5~5.2	22.5	22.5~22.8	10.8	30	27
		PG21		PG21	6.2~8	28.3	28.3~28.7	12	36	33
	3(3孔)	PG29		PG29	7.7~10	37	37~37.4		46	41
		PG7	B(黑色) W(灰白色)	PG7	1.3~2.3	12.5	12.5~12.8	8	17	
		PG9		PG9	1.3~2.3	15.2	15.2~15.8	8.2	22	19
		PG13.5		PG13.5	3~4.2	20.4	20.4~20.7	10	27	24
	4(4孔)	PG16		PG16	3.4~4.8	22.5	22.5~22.8	10.8	30	27
		PG21		PG21	5.6~7.3	28.3	28.3~28.7	12	36	33
		PG29		PG29	7~9	37	37~37.4		46	41
		PG16		PG16	2~3.1	22.5	22.5~22.8	10.8	30	27
	5(5孔)	PG21		PG21	2.6~3.6	28.3	28.3~28.7	12	36	33
		PG29		PG29	4.1~6	37	37~37.4		46	41
		PG36		PG36	6.5~8.3	47	47~47.4	14	51	52
		PG21		PG21	3.6~5.2	28.3	28.3~28.7	12	36	33
	6(6孔)	PG29		PG29	5.6~7	37	37~37.4		46	41
		PG16		PG16	2~3	22.5	22.5~22.8	10.8	30	27
	7(7孔)	PG21		PG21	2.6~3.6	28.3	28.3~28.7	12	36	33
		PG29		PG29	4.6~6	37	37~37.4		46	41
	8(8孔)	PG13.5		PG13.5	1.2~2.5	20.4	20.4~20.7	15	27	27
		PG21		PG21	1.5~3	28.3	28.3~28.7		36	33



请按图示订货

型号			颜色
代码	孔数	螺纹规格	
ZIL 54	1(1扁孔)	M16	B(黑色) W(灰白色)
		M20	

ZIL 54—1—M16—B

产品结构图

