



代码	类型	材质		介质温度	环境温度	公称压力
		主体	密封圈			
BLA95	蝶阀	SUS304	EPDM	-40~130℃	-20~80℃	0~1.6Mpa

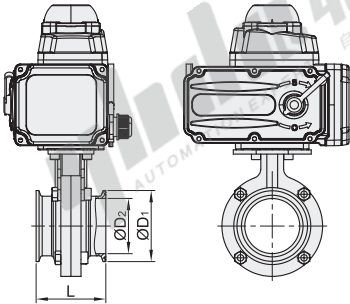

视角标准：第一视角

型号		电源类型	动作时间 (s)	适用管径	D ₁	D ₂	L	适用执行器型号		
代码	公称尺寸									
BLA95	10	DC24V	5	1"	50.5	22.1	66	BMS74-05-DC24V-10-50		
		AC220V	20					BMS74-05-DC24V-10-50		
	15	DC24V	5	1.5"		34.8		BMS74-05-AC220V-30-80		
		AC220V	20					BMS74-05-DC24V-10-50		
	20	DC24V	10	2"	64	47.5	70	BMS74-05-AC220V-30-80		
		AC220V	30					BMS74-05-DC24V-10-50		
	25	DC24V	10	2.5"	77.5	60.2	76	BMS74-05-DC24V-10-50		
		AC220V	30					BMS74-05-DC24V-10-50		
	30	DC24V	10	3"		72.9		BMS74-05-AC220V-30-80		
		AC220V	30					BMS74-05-DC24V-10-50		
	40	DC24V	10	4"	119	97.4	86	BMS74-05-DC24V-10-50		
		AC220V	30					BMS74-05-AC220V-30-80		
		DC24V	10					BMS74-15-DC24V-15-140		
		AC220V	30					BMS74-15-AC220V-30-150		

① 动作时间仅做参考，以实际动作时间为准。



请按图示订货

型号		电源类型	动作时间 (s)
代码	公称尺寸		
BLA95	10	DC24V	20
		AC220V	

BLA95—10—DC24V—20



未税价(元)

优惠价	
数量	1~50
价格	100% 另行报价



交货期

8