

耐热型拉伸弹簧


中载型

代码	类型			材质		挂钩相对角度	使用温度
				国标	相当		
YNUS	中载型	半圆形单挂钩	标准型	07Cr17Ni7Al	SUS631	90°	可在高温300°C以下使用
YNUY				180°			





- ① 弹簧两端挂钩保持水平或者垂直状态，无法保证挂钩开口方向每批次都一致，不影响使用。
- ② 最大位移量(Fmax)为常温(40°C)下测量值。

挂钩相对角度90°
YNUS

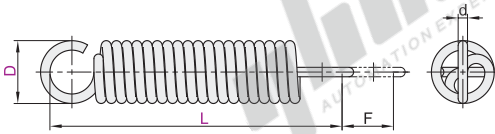

挂钩相对角度180°
YNUY

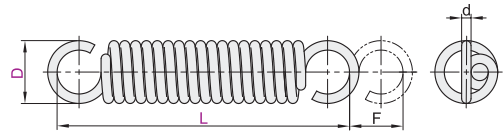

代码	型号	D	L	线径d	动态负载时		初始张力(N)	弹簧常数N/mm	
					最大位移量Fmax	最大荷载N			
YNUS YNUY	2	10	0.3	3.8	3.29	0.62	0.70		
				6.7				0.40	
				9.6					0.28
				12.6					
	15	1.14							
	6.0		0.56						
	20			0.37					
	25				0.28				
	30	0.22							
	15		0.86						
	20			0.53					
	25				0.38				
	30	0.30							
	35		0.25						
	40			0.21					
	15				1.39				
	20	0.77							
	25		0.53						
	30			0.41					
	35				0.33				
	40	0.28							
	45		0.24						
	50			0.21					
	20				2.31				
25	1.52								
30		1.13							
35			0.90						
40				0.75					
45	0.64								
50		0.56							
55			0.50						
60				0.45					
25	2.50								
30		1.73							
35			1.32						
40				1.07					
45	0.89								
50		0.77							
55			0.68						
60				0.60					
65	0.54								
70		0.50							
30			2.78						
35				1.98					
40	1.54								
45		1.26							
50			1.06						
55				1.06					
60	0.81								
65		0.73							
70			0.66						
75				0.60					
80	0.55								

代码	型号	D	L	线径d	动态负载时		初始张力(N)	弹簧常数N/mm	
					最大位移量Fmax	最大荷载N			
YNUS YNUY	12	35	1.6	8.5	64.54	14.78	6.24		
				11.8				4.60	
				14.3					3.66
				16.8					
	19.3	2.59							
	22.3		2.26						
	24.5			2.00					
	27.2				1.80				
	30	1.64							
	32.7		1.50						
	36.3			1.28					
	41.0				1.12				
	45	1.12							
	10.2		6.34						
	13.1			4.80					
	16.4				3.86				
	19.7	3.23							
	21.1		2.78						
	24.6			2.44					
	27.6				2.17				
	31.1	1.96							
	32.8		1.78						
	37.5			1.51					
	42.8				1.31				
60.0	0.98								
45		6.49							
50			5.00						
55				4.09					
60	3.45								
65		2.98							
70			2.63						
75				2.35					
80	2.12								
90		1.78							
100			1.53						
125				1.14					
56.7	0.90								
71.5		8.50							
12.5			6.70						
15.0				5.50					
17.3	4.70								
20.0		4.10							
22.5			3.62						
25.0				3.25					
29.0	2.70								
33.6		2.30							
39.1			1.69						
53.0				1.33					
64.2	8.50								
14.7		6.10							
20.0			4.74						
25.2				3.89					
30.8	3.29								
36.1		2.38							
48.3			2.38						
59.5				1.86					
72.5	1.53								
14.7		12.45							
20.7			9.20						
24.9				7.31					
29.7	6.05								
41.0		4.24							
50.6			3.26						
61.4				2.65					
74.7	2.23								

① 初始张力，弹簧常数为参考值。负载(kgf)=负载N×0.101972。



代码	型号
YNUS	D L
YNUY	② ①② 10 15

请按图示订货 YNUS-D2-L10



数量	优惠价
1~19	20~
价格	100% 另行报价



交货期
1

未税价(元)