



| 代码 | 类型 | 材质 | 硬度 (肖氏) | 颜色 | 使用 温度范围 | 使用压力 | 线速度 | 用途 |
|-------|-----|-----|------------|----|------------|-------------|-------------|-------------------|
| XUE31 | UN型 | TPU | HS90±5 | 蓝色 | -20~100°C | 30MPa 以下 | 0.03~0.5m/s | 孔轴通用的轴向滑动 单向密封 |



安装方式

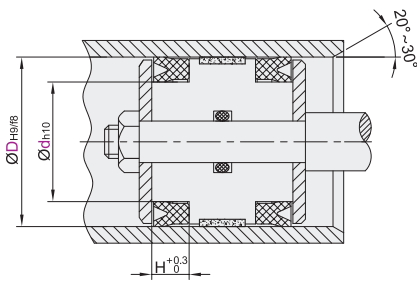

① 活塞缸内面应作0.1~0.8μm Ra的研磨或抛光。

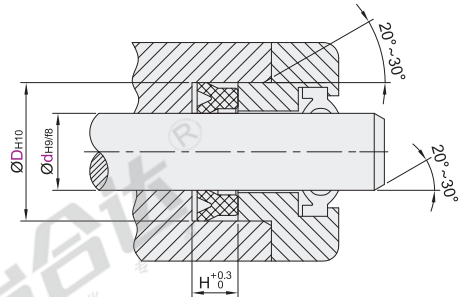

② 活塞杆表面应作0.2~0.4μm Ra的抛光。



视角标准：第一视角

| 型号 | d | D | B | H | |
|-------|------|------|---|-----|--|
| XUE31 | 4 | 10 | 4 | 4.5 | |
| | | 12 | | | |
| | 5 | 11 | 8 | 9 | |
| | | 12 | 5 | 6 | |
| | 6 | 12 | 4 | 4.5 | |
| | | | 6 | 7 | |
| | 8 | 12 | 5 | 6 | |
| | | 14 | 6 | 7 | |
| | 9 | 19 | 6 | 7 | |
| | | | 8 | 9 | |
| | | 16 | 4 | 5 | |
| | | | 6 | 7 | |
| | 10 | 18 | 5 | 6 | |
| | | | 6 | 7 | |
| | | 20 | 8 | 9 | |
| | | | 8 | 9 | |
| | 11.2 | 19.2 | 5 | 6 | |
| | | | 5 | 6 | |
| | 12 | 20 | 6 | 7 | |
| | | | 8 | 9 | |
| 14 | 22 | | | | |
| 16 | 24 | | | | |
| 18 | 26 | | | | |
| 20 | 28 | | | | |
| 22 | 30 | 5 | 6 | | |
| 22.4 | 30 | | | | |
| 23.5 | 31.5 | | | | |
| 24 | 32 | | | | |
| 25 | 33 | | | | |

| 型号 | d | D | B | H |
|-------|------|------|----|----|
| XUE31 | 27 | 35 | | |
| | 28 | 36 | 5 | 6 |
| | 30 | 40 | | |
| | 31.5 | 41.5 | | |
| | 32 | 42 | | |
| | 35 | 45 | | |
| | 35.5 | 45 | 6 | 7 |
| | 36 | 46 | | |
| | 38 | 48 | | |
| | 40 | 50 | | |
| | 45 | 55 | | |
| | 45 | 56 | 7 | 8 |
| | 50 | 60 | | |
| | 53 | 63 | | |
| | 55 | 65 | | |
| | 56 | 66 | 6 | 7 |
| | 58 | 68 | | |
| | 60 | 70 | | |
| | 60 | 71 | 7 | 8 |
| | 63 | 73 | | |
| | 65 | 75 | | |
| | 70 | 80 | 6 | 7 |
| | 75 | 85 | | |
| | 80 | 90 | | |
| | 85 | 100 | 10 | 11 |
| | 90 | 105 | 9 | 10 |
| | 95 | 110 | 10 | 11 |
| | 100 | 115 | 9 | 10 |



请按图示订货

| 型号 | d | D | B |
|-------|---|----|---|
| XUE31 | 4 | 10 | 4 |
| | 5 | 12 | 4 |

XUE31-d4-D10-B4



未税价(元)

优惠价

| 数量 | 1~10 | 11~ |
|----|------|------|
| 价格 | 100% | 另行报价 |



交货期

7