


代码	类型		材质			表面处理
			外壳	绝缘体/密封圈	接触体	外壳
ZIX85	面板安装公插座	方型	压铸铝合金	合成橡胶/ 氯丁橡胶	铜合金 (镀金/银)	军绿色镀锌

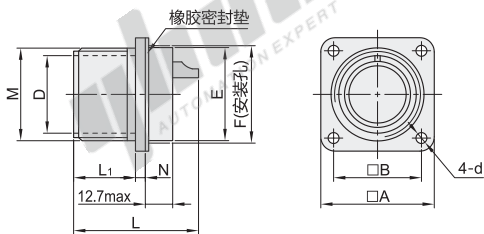

视角标准：第一视角

连接器

型号		芯数	触头形状	A	B	d	D	E	F	M	L	L ₁	N		适配插座类型	
代码	外壳规格												max	min	直通型插头(P554)	90°弯角型插头(P555)
ZIX85	16	3		32.54	24.61	3.05	20.5	26.21	22	1-20UNEF	52.37	19.05	3.96	1.57	ZIX81-16-3	ZIX82-16-3
		7													ZIX81-16-7	ZIX82-16-7
	18	4		34.93	26.97		23.67	29.36	25	1 1/8-18UNEF	52.37	19.05	5.16	2.39	ZIX81-18-4	ZIX82-18-4
		5													ZIX81-18-5	ZIX82-18-5
		10													ZIX81-18-10	ZIX82-18-10
		4													ZIX81-20-4	ZIX82-20-4
		7													ZIX81-20-7	ZIX82-20-7
		20		38.1	29.36	3.05	26.87	32.56	29.5	1 1/4-18UNEF	55.58	19.05	5.16	2.39	ZIX81-20-9	ZIX82-20-9
		14													ZIX81-20-14	ZIX82-20-14
		17													ZIX81-20-17	ZIX82-20-17
		3	插针	41.28	31.75	3.05	30.02	35.71	32	1 3/8-18UNEF	55.58	19.05	5.16	2.39	ZIX81-22-3	ZIX82-22-3
		4													ZIX81-22-4	ZIX82-22-4
	22	8													ZIX81-22-8	ZIX82-22-8
		19													ZIX81-22-19	ZIX82-22-19
		7													ZIX81-24-7	ZIX82-24-7
		24													ZIX81-24-9	ZIX82-24-9
		9		44.45	34.93	3.73	33.2	38.91	35	1 1/2-18UNEF	58.72	20.62	5.16	2.39	ZIX81-24-16	ZIX82-24-16
		16													ZIX81-24-24	ZIX82-24-24
		24													ZIX81-28-14	ZIX82-28-14
		14													ZIX81-28-20	ZIX82-28-20
		20													ZIX81-28-22	ZIX82-28-22
		28													ZIX81-28-26	ZIX82-28-26
		22		50.8	39.67	3.73	38.76	45.26	41	1 3/4-18UNS	58.72	20.62	5.16	2.39	ZIX81-28-22	ZIX82-28-22
		26													ZIX81-28-26	ZIX82-28-26
		37													ZIX81-28-37	ZIX82-28-37

① 接触体排列详细尺寸见“MIL系列圆形连接器”产品简介。

② 可选装直通型插头或者弯角型插头。



请按图示订货

型号		芯数
代码	外壳规格	
ZIX85	16	3
		7

ZIX85—16—3